


59VJ

HUSSMANN[®]
CORPORATION

Eng. #340425
February, 1989

Installation Instructions

REMOTE ALARM DIALER

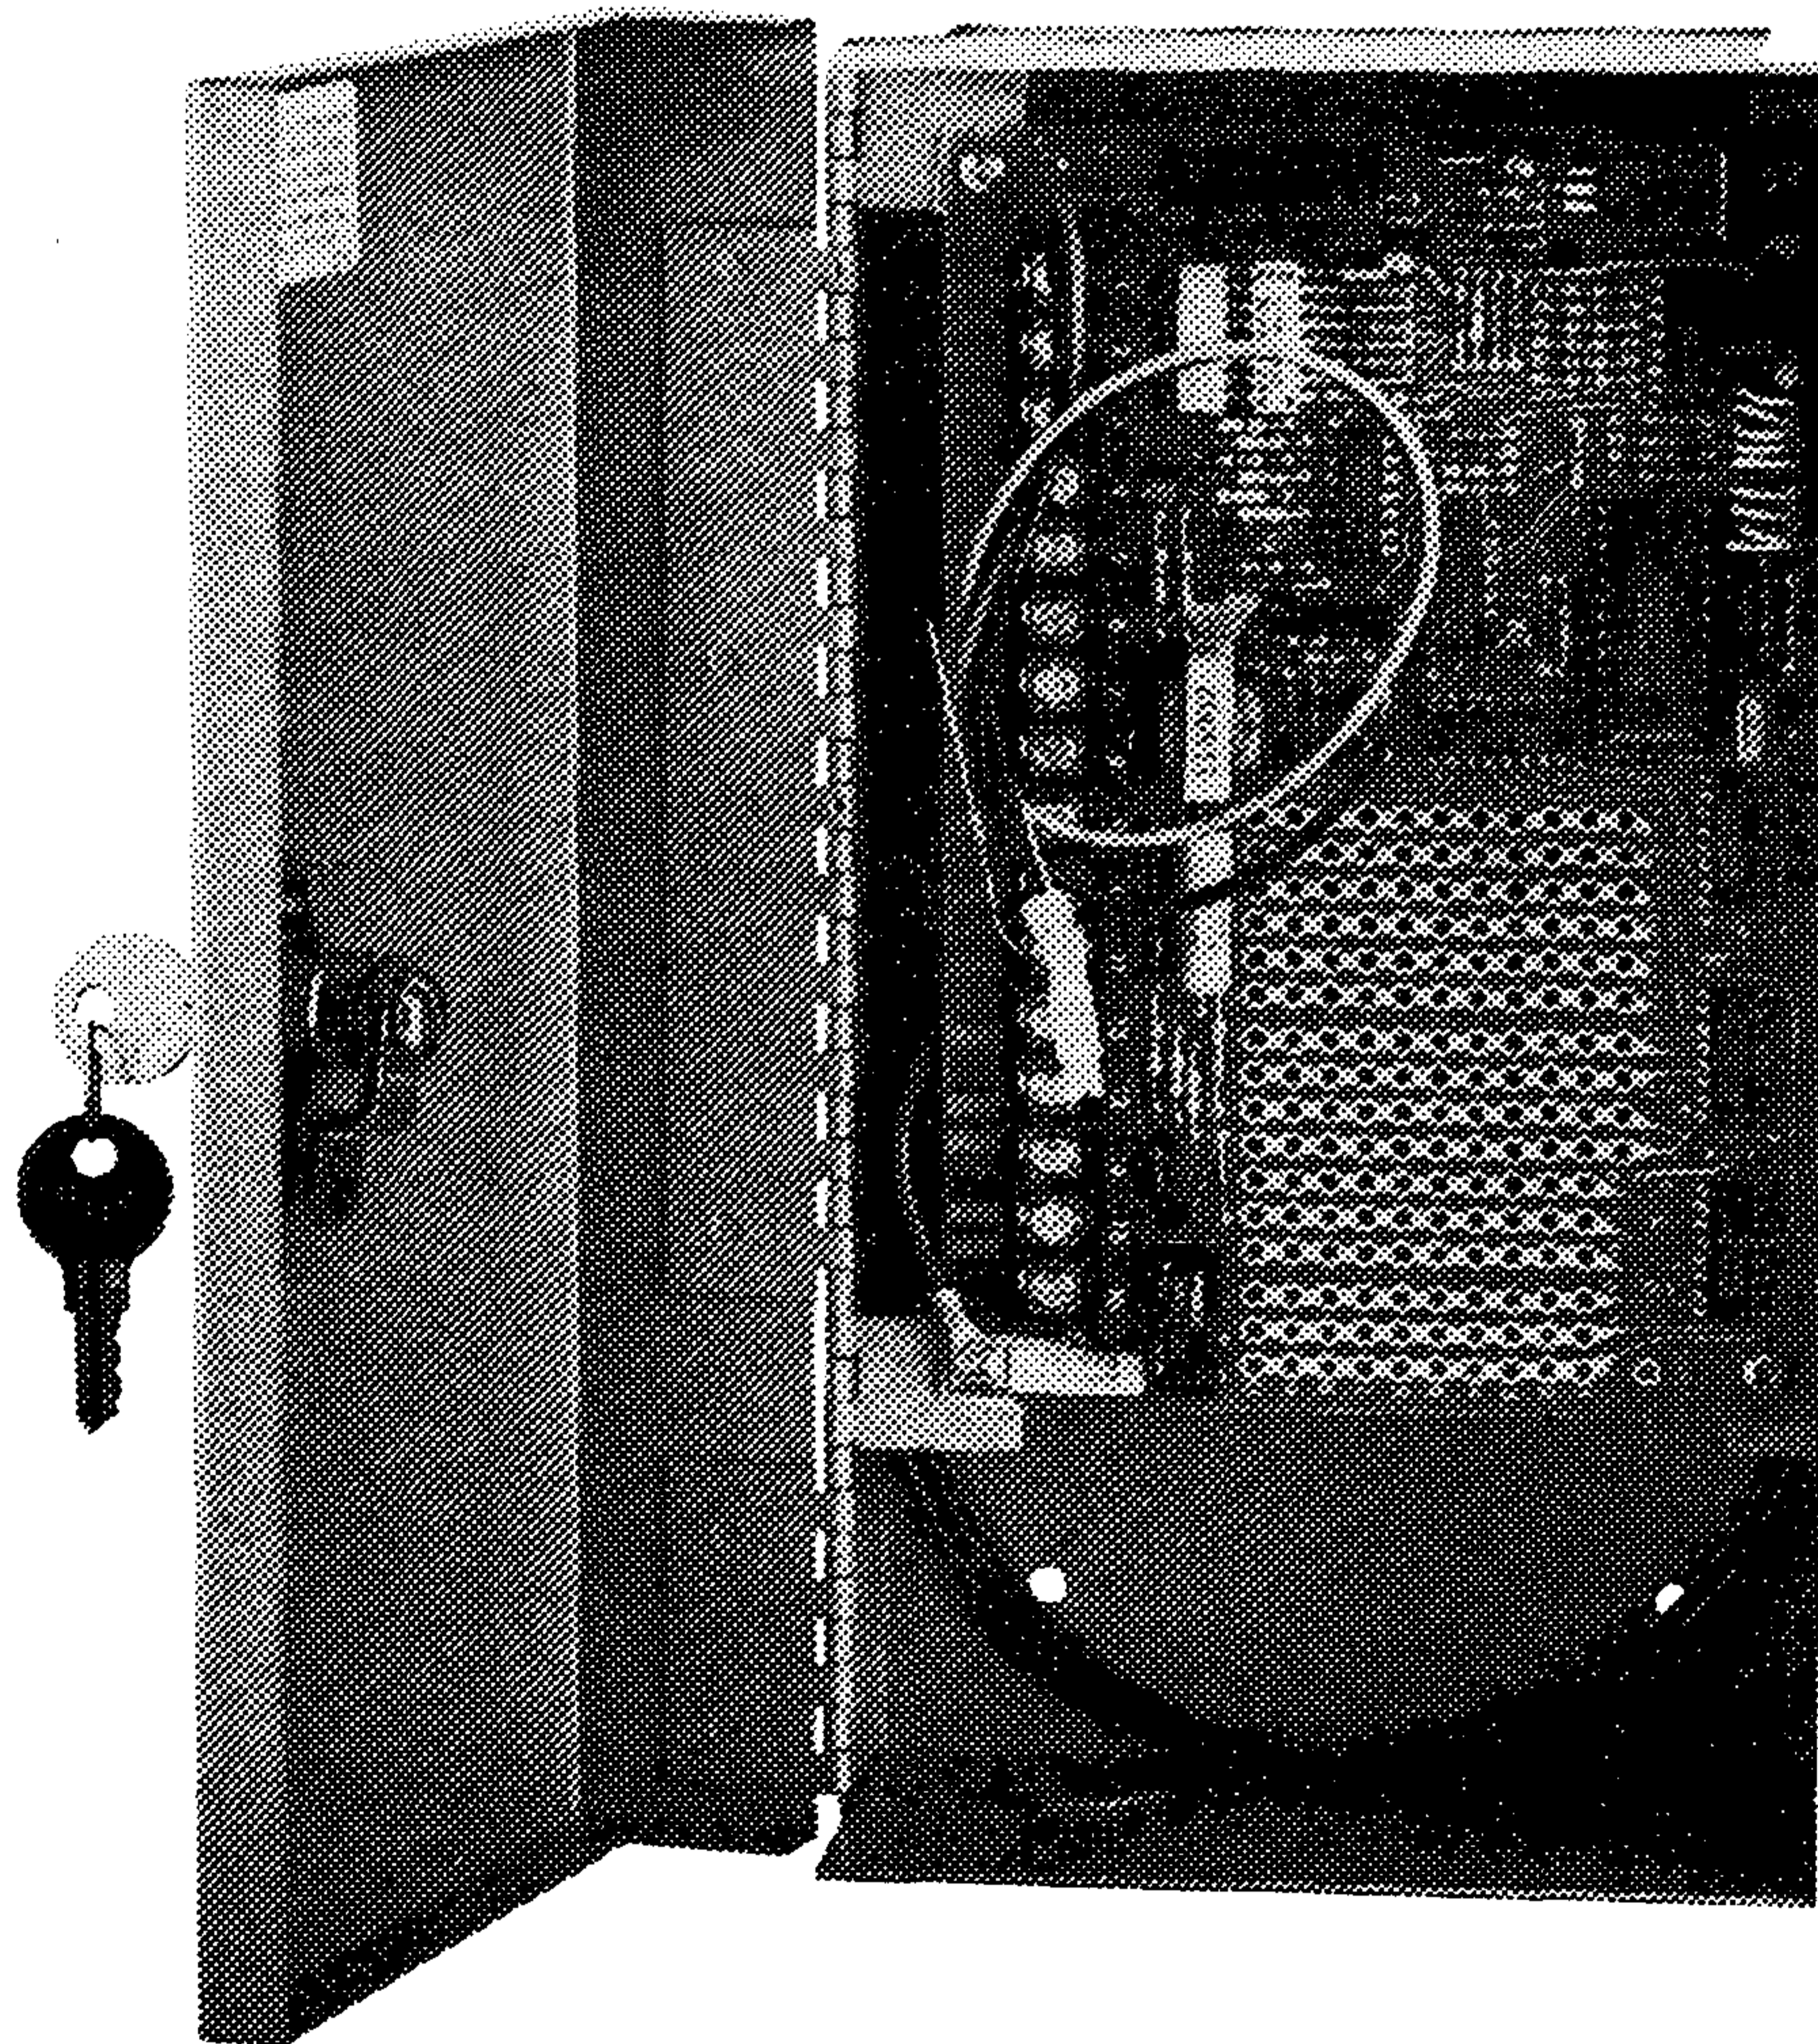

Installation Instructions

DESCRIPTION

The Silent Knight telephone dialer is used to report on equipment alarm conditions to an alarm monitoring facility. The dialer is the same type used by most store security systems and is compatible with current monitoring formats. The dialer will monitor 5 alarm points, i.e., 5 Super Plus systems. Depending on the size of the installation, the device could be used for monitoring fire, intrusion (burglary), and still monitor 3 rack functions. The monitoring company must be advised as to which rack is connected to which dialer channel.

The kit consists of the dialer (shipped in a separate box) and an isolating relay mounted in the Super Plus Panel. This isolating relay activates when the Super Plus alarm relay is activated. As supplied, the dialer comes with a 120VAC transformer power supply. A backup battery is not included but may be ordered from any alarm installer.

INSTALLATION

1. Select the monitoring company and notify telephone company.
2. Select monitoring format. Refer to Silent Knight Installation Instructions for format codes.
3. Mount the dialer on the wall and connect it to the telephone line where it first comes into the building. The dialer does not require a dedicated telephone line, but it MUST be installed ahead of any telephones. A line seizure relay is built into the dialer. In operation, an alarm condition will cause the dialer to disconnect any telephone from the line and start the dial out sequence. Do not attach dialer to a coin phone line or any line with a computer access.
4. Connect 2 wires per channel and run them from alarm dialer back to the alarm relay on rack to be monitored. Refer to Silent Knight Installation Instructions shipped with dialer for specific terminal connections.
5. Program the telephone dialer as shown in the Silent Knight Installation Instructions.
6. Conduct sufficient tests with the monitoring company to be sure that alarm codes are being properly identified.

In the event there is a problem with the dialer, call Silent Knight directly.