

HUSSMANN®

Mobile Spot Merchandisers

*Flat Top With Flat Interior (and Sliding Tempered Glass Lids) and
Solid Top (With Butterfly-Style Hinged Lids)*



Mobile Spot Merchandisers

Versatility – Choice of Flat Top and Solid Top ... Solid White Exterior Panels for Custom Graphic Decals.

Mobility – Standard Swivel Casters With Front Two Locking Allows Spots to Be Moved Anywhere in Your Store at any Time.

Flexibility – Multi-Temperature Capability From Freezer to Refrigerator Available in all Models.

HSD/SC/P – Flat Top With Flat Interior and Sliding Tempered Glass Lids



Standard Features

- Tempered Sliding Lids
- “E” Heat Reflective Coated Sliding Glass Lids
- Lid Door Locks
- Swivel Casters (Front Two Locking)
- One Hanging Wire Basket
- 1” Interior Clean Out Drain in Bottom
- Textured Aluminum Interior
- White Baked Enamel Exterior
- Power Cord Attached
- Multi-Temperature Capability (-10F to +41F)

Options


- Additional Wire Display Baskets
- Decal Production and/or Application

Model	External			Internal			40' Container	Ship Weight	Shipping Dimensions L x D x H	Plug
	A Length	B Depth	C Height	D Length	E Depth	F Height				
HSD/SC-132P	28.90"	21.26"	36.30"	23.82"	16.14"	20.59"	92	102 lbs.	31.3" x 23.8" x 37.5"	NEMA 5-15P
HSD/SC-218P	42.52"	21.26"	36.30"	37.40"	16.14"	20.59"	56	124 lbs.	44.9" x 23.8" x 37.5"	NEMA 5-15P


Note: Height Includes 2.6" Casters.

Model	Voltage	Cu. Ft. Cap.	R-134a Refrig.	Run Amps	Fuse Amps	Temp. Range	Hanging Wire Basket			No. of Baskets Shipped in Case Standard	No. of Addl. Baskets Needed to Fill Case	Basket Part Number
							Length	Width	Height			
HSD/SC-132P	115/60/1	4.66	3.00 oz.	1.5	15	-10F to +41F	15.94"	8.26"	11.81"	1	1	5-HM-7007
HSD/SC-218P	115/60/1	7.70	3.88 oz.	1.3	15	-10F to +41F	15.94"	8.26"	11.81"	1	3	5-HM-7007

HSD/SC/P Plan View

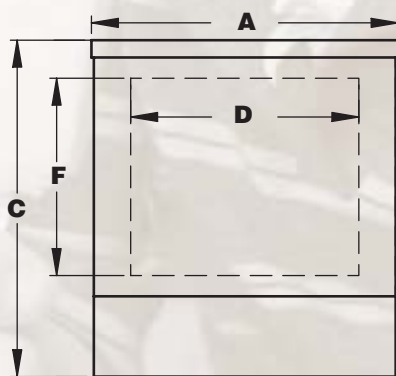

HSD/SC/P Cross Section

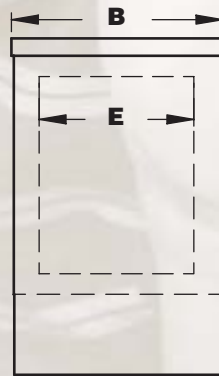

Warranty

Five years against failure of compressor. One year against material and workmanship, includes labor.

Note regarding all products featured: For optimum performance, these models are designed for use where temperatures and humidity are maintained at 75F and 55% RH. Locate case away from direct sunlight, rapid air current and extreme temperature changes.

Hussmann reserves the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

HBD/BC/H – Solid Top With Butterfly-Style Hinged Lids



HBD/BC-H

Standard Features

- Removeable Solid Butterfly Hinged Top
- Sliding Glass Doors Under Solid Top
- Locking Solid Top
- Swivel Casters (Front Two Locking)
- One Hanging Wire Basket
- 1" Interior Clean Out Drain in Bottom
- Textured Aluminum Interior
- White Baked Enamel Exterior
- Power Cord Attached
- Multi-Temperature Capability (-10F to +41F)

Options


- Additional Wire Display Baskets
- Decal Production and/or Application

Model	External			Internal			G	H	40' HQ Container	Ship Weight	Shipping Dimensions L x D x H	Plug
	A Length	B Depth	C Height	D Length	E Depth	F Height	Step Height	Step Width				
HBD/BC-142H	28.90"	21.26"	33.78"	23.82"	16.14"	25.55"	9.45"	9.25"	156	86 lbs.	31.3" x 23.8" x 35.2"	NEMA 5-15P
HBD/BC-195H	36.42"	21.26"	33.78"	31.30"	16.14"	25.55"	9.45"	9.25"	128	95 lbs.	38.8" x 23.8" x 35.2"	NEMA 5-15P
HBD/BC-302H	45.70"	23.77"	33.78"	40.55"	18.50"	25.55"	9.45"	9.25"	88	130 lbs.	48.0" x 26.2" x 35.2"	NEMA 5-15P


Note: Height Includes 2.6" Casters.

Model	Voltage	Cu. Ft. Cap.	R-134a Refrig.	Run Amps	Fuse Amps	Temp. Range	Hanging Wire Basket			No. of Baskets Shipped in Case Standard	No. of Addl. Baskets Needed to Fill Case	Basket Part Number
							Length	Width	Height			
HBD/BC-142H	115/60/1	5.00	3.00 oz.	1.5	15	-10F to +41F	15.94"	8.26"	11.81"	1	1	5-HM-7007
HBD/BC-195H	115/60/1	6.89	3.53 oz.	1.6	15	-10F to +41F	15.94"	8.26"	11.81"	1	2	5-HM-7007
HBD/BC-302H	115/60/1	10.67	5.29 oz.	1.8	15	-10F to +41F	18.30"	8.26"	11.81"	1	3	5-HM-7008

HBD/BC/H Plan View

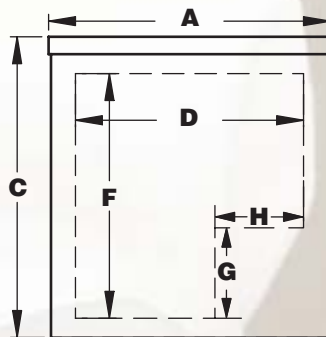

HBD/BC/H Cross Section

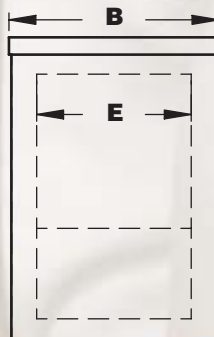

3128193
 Conforms to UL Std. 471
 Certified to CSA C22.2 No 120
 Conforms to NSF/ANSI 7





Providing equipment and services to manage controlled-temperature environments for food and other perishables, our Climate Control Technologies sector encompasses both transport and stationary refrigeration solutions. Our product brands include Thermo King®, a world leader in transport temperature control systems, and Hussmann®, a manufacturer of refrigeration and food merchandising equipment.

www.thermoking.com www.hussmann.com www.ingersollrand.com

Web Site: www.hussmann.com
1-800-922-1919