





SELF SERVICE MULTI-DECK HOT CASE

HUSSMANN - IM - 0(3, 4, 5) - (X*)(3, 4, 5, 6) - H (CHINO)



IM-03-H
Self service hot module

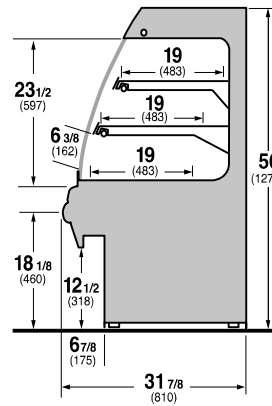


IM-04-H
Hot Multi-Deck

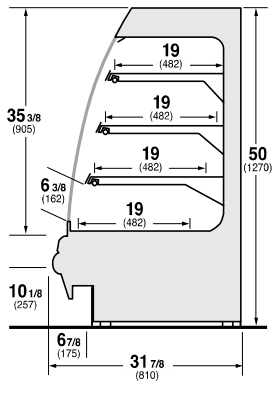


IM-05-H
Hot Multi-Deck

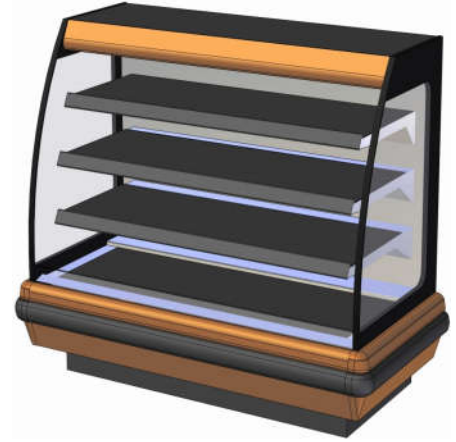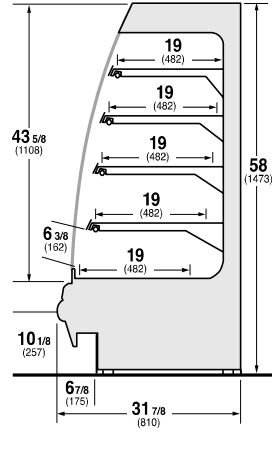

IM-C5-H Center Module / **IM-15-H** C-Series Match

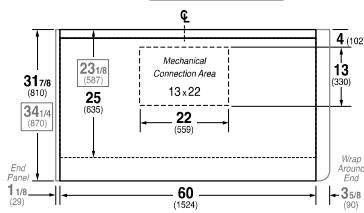

IM-E5-H End Module



ELECTRICAL DATA:

208 VOLT MODELS	VOLTS	PH	HZ	TOTAL HOT LEVELS ***	WATTS	AMPS	WIRES **	CANOPY LIGHTS		SHELF LIGHTS		OPTIONAL LEDGE LIGHTS		TOTAL LIGHTS		
								AMPS	WATTS	# ROWS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
IM-03-X3-H208	208	1	60	3	1789	8.6	4	0.19	21	2	0.38	42	N/A	N/A	0.57	63
IM-03-X4-H208	208	1	60	3	2517	12.1	4	0.26	28	2	0.52	56	N/A	N/A	0.78	84
IM-03-X5-H208	208	1	60	3	3224	15.5	4	0.32	35	2	0.52	56	N/A	N/A	0.84	91
IM-03-X6-H208	208	1	60	3	3890	18.7	4	0.38	42	2	0.66	70	N/A	N/A	1.04	112
IM-03-X8-H208	208	1	60	3	5013	24.1	4	0.52	56	2	0.76	84	N/A	N/A	1.28	140
IM-04-X3-H208	208	1	60	4	2371	11.4	4	0.19	21	3	0.57	63	N/A	N/A	0.76	84
IM-04-X4-H208	208	1	60	4	3328	16	4	0.26	28	3	0.78	84	N/A	N/A	1.04	112
IM-04-X5-H208	208	1	60	4	4306	20.7	4	0.32	35	3	0.96	105	N/A	N/A	1.28	140
IM-04-X6-H208	208	1	60	4	5200	25	4	0.38	42	3	1.14	126	N/A	N/A	1.52	168
IM-04-X8-H208	208	1	60	4	6323	30.4	4	0.52	56	3	1.14	126	N/A	N/A	1.66	182
IM-05-X3-H208	208	1	60	5	2954	14.2	4	0.19	21	4	0.76	84	N/A	N/A	0.95	105
IM-05-X4-H208	208	1	60	5	4160	20	4	0.26	28	4	1.04	112	N/A	N/A	1.30	140
IM-05-X5-H208	208	1	60	5	5366	25.8	4	0.32	35	4	1.28	140	N/A	N/A	1.60	175
IM-05-X6-H208	208	1	60	5	6490	31.2	4	0.38	42	4	1.52	168	N/A	N/A	1.90	210
IM-05-X8-H208	208	1	60	5	8320	40	4	0.52	56	4	2.08	224	N/A	N/A	2.60	280

240 VOLT MODELS	VOLTS	PH	HZ	TOTAL HOT LEVELS ***	WATTS	AMPS	WIRES **	CANOPY LIGHTS		SHELF LIGHTS		OPTIONAL LEDGE LIGHTS		TOTAL LIGHTS		
								AMPS	WATTS	# ROWS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
IM-03-X3-H240	240	1	60	3	1800	7.5	4	0.19	21	2	0.38	42	N/A	N/A	0.57	63
IM-03-X4-H240	240	1	60	3	2528	10.5	4	0.26	28	2	0.52	56	N/A	N/A	0.78	84
IM-03-X5-H240	240	1	60	3	3216	13.4	4	0.32	35	2	0.64	70	N/A	N/A	0.96	105
IM-03-X6-H240	240	1	60	3	3888	16.2	4	0.38	42	2	0.76	84	N/A	N/A	1.14	126
IM-04-X3-H240	240	1	60	4	2376	9.9	4	0.19	21	3	0.57	63	N/A	N/A	0.76	84
IM-04-X4-H240	240	1	60	4	3336	13.9	4	0.26	28	3	0.78	84	N/A	N/A	1.04	112
IM-04-X5-H240	240	1	60	4	4296	17.9	4	0.32	35	3	0.96	105	N/A	N/A	1.28	140
IM-04-X6-H240	240	1	60	4	5208	21.7	4	0.38	42	3	1.14	126	N/A	N/A	1.52	168
IM-05-X3-H240	240	1	60	5	2952	12.3	4	0.19	21	4	0.76	84	N/A	N/A	0.95	105
IM-05-X4-H240	240	1	60	5	4176	17.4	4	0.26	28	4	1.04	112	N/A	N/A	1.30	140
IM-05-X5-H240	240	1	60	5	5376	22.4	4	0.32	35	4	1.28	140	N/A	N/A	1.60	175
IM-05-X6-H240	240	1	60	5	6480	27	4	0.38	42	4	1.52	168	N/A	N/A	1.90	210
IM-05-X8-H240	240	1	60	5	8352	34.8	4	0.52	56	4	2.08	224	N/A	N/A	2.60	280

LEGEND	
N/A	NOT AVAILABLE
TBD	TO BE DETERMINED
SBO	SUPPLIED BY OTHERS
EXTERNAL END PANEL WIDTH KEY	
# OF END PNL'S	TOTAL ADDED LENGTH (IN.)
1	1.125
2	2.25

MODULE NOMENCLATURE KEY:	
IM =	ISLA MODULE
*** 03 =	3 HEATED LEVELS 50" HIGH W/ +8" BASE
*** 04 =	4 HEATED LEVELS 50" HIGH
*** 05 =	5 HEATED LEVELS; 58" HIGH
* C, E, I =	CENTER, END or INLINE CASE
(#)	(MODULE LENGTH IN FEET)
H =	HOT SELF SERVICE MULTIDECK
EXAMPLE	IM-04-E5-H = ISLA MODULE, 50" HIGH, END 5' WIDE, HOT SELF-SERVICE MULTI-DECK

* X = C, E, I C = CENTER, E = END, I = INLINE

** INCLUDES GROUND WIRE

*** TOTAL HEATED LEVELS = # ROWS OF SHELVES + BOTTOM WARMING SURFACE

OPTIONS/NOTES:

- NOTE: CASE WIDTH INCLUDES END PANELS WITH OPTIONAL INTERIOR END PANELS
- NOTE: CASES MUST BE GROUNDED
- NOTE: LED LIGHTS ARE NOT AVAILABLE ON HOT CASES AT THIS TIME.
- NOTE: FOR TOTAL ELECTRICAL LOADS ADD LIGHT AMPS HOT LEVEL AMPS.