

Portion of parts removed for clarity.

5 door merchandiser shown.



### NSF Certification

This merchandiser model is manufactured to meet NSF/ANSI (National Sanitation Foundation) Standard #7 requirements for construction, materials and cleanability.

Performance Data	Page 2	Estimated Shipping Weights	Page 6
Product Data (AHRI Statistics)	Page 2	Shelf Options	Page 6
Cross Section	Page 3	Wiring Diagrams	Page 7
Plan View	Page 4	Computing Refrigeration and Electrical Load	Page 8
Electrical Loads	Page 5	QR Code for Parts and Product Information	Page 8
		Revision History	Page 8

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

Data sheet-Insight IRLN

### Refrigeration Data <sup>1</sup>

IRLN		Optimal Shelf Life		Energy Comparison
Application		Frozen Food	Ice Cream	AHRI 1200 Rating Point <sup>3</sup>
Lit Mullions	Discharge Air °F (°C)	-2 (-18.8)	-7 (-21.6)	-2 (-18.8)
	Average Evaporator °F (°C) <sup>2</sup>	-10 (-23.3)	-18 (-27.8)	-10 (-23.3)
	Unit Sizing °F (°C)	-13 (-25.0)	-21 (-29.4)	-13 (-25.0)
	Parallel Btu/hr/dr (Watts/dr)	946 (277)	1004 (294)	946 (277)
	Conventional Btu/hr/dr (Watts/dr)	980 (287)	1040 (305)	980 (287)

**Notes:**

1. All data based on store temperature and humidity that does not exceed NSF Type 1 ambient conditions of 75°F and 55% relative humidity unless otherwise noted.
2. Average evaporator temperature shown. Use dew point for high glide refrigerants for unit sizing. Care should be taken to use the dew point in PT tables for measuring and adjusting superheat. Adjust evaporator pressure as needed to maintain discharge air temperature shown.
3. AHRI 1200 Rating Point for energy comparison only.

### Defrost Data

<b>Frequency</b> (hours between defrost)	24						
<b>OFFTIME</b>							
<b>Time (minutes)</b>	Not Recommended						
<b>ELECTRIC TEMP TERM (°F)</b>	48						
<b>FAILSAFE (MINUTES)</b>	50						
<b>GAS DURATION (MINUTES)</b>	20						
<b>Defrost Water <sup>4</sup></b>							
	<table border="0"> <tr> <td><b>Frozen Food</b></td> <td><b>Ice Cream</b></td> </tr> <tr> <td>1.2 lb/dr/day</td> <td>1.3 lb/dr/day</td> </tr> <tr> <td>(0.54 kg/dr/day)</td> <td>(0.59 kg/dr/day)</td> </tr> </table>	<b>Frozen Food</b>	<b>Ice Cream</b>	1.2 lb/dr/day	1.3 lb/dr/day	(0.54 kg/dr/day)	(0.59 kg/dr/day)
<b>Frozen Food</b>	<b>Ice Cream</b>						
1.2 lb/dr/day	1.3 lb/dr/day						
(0.54 kg/dr/day)	(0.59 kg/dr/day)						

<sup>4</sup> (± 15% based on case configuration and product loading).

### Conventional Controls

<b>Low Pressure Backup Control CI/CO <sup>5</sup></b>	
<b>Frozen Food</b>	<b>Ice Cream</b>
-18°F/-34°F	-26°F / 45°F
<b>Indoor Unit Only, Pressure Defrost Termination <sup>5</sup></b>	
Not Recommended	
<sup>5</sup> Use a Temperature Pressure Chart to determine PSIG conversions.	

### Estimated Charge <sup>6</sup>

<b>2 dr</b>	1.8 lb	29 oz	0.8 kg
<b>3 dr</b>	2.7 lb	43 oz	1.2 kg
<b>4 dr</b>	3.6 lb	58 oz	1.6 kg
<b>5 dr</b>	4.6 lb	74 oz	2.1 kg

<sup>6</sup> This is an average for all refrigerant types. Actual refrigerant charge may vary by approximately half a pound.

### Product Data

<b>Gross Refrigerated Volume <sup>7</sup> (Cu Ft/Dr)</b>	27.93 ft <sup>3</sup> /dr (0.79 m <sup>3</sup> /dr)
<b>AHRI Total Display Area <sup>8</sup> (Sq Ft/Dr)</b>	14.30 ft <sup>2</sup> /dr (1.33 m <sup>2</sup> /dr)
<b>Shelf Area <sup>9</sup> (Sq Ft/Dr)</b>	28.68 ft <sup>2</sup> /dr (2.66 m <sup>2</sup> /dr)

<sup>7</sup> AHRI Gross Refrigerated Volume: Refrigerated Volume/Unit of Length, ft<sup>3</sup>/ft [m<sup>3</sup>/m]

<sup>8</sup> Computed using AHRI 1200 standard methodology: Total Display Area, ft<sup>2</sup> [m<sup>2</sup>]/Unit of Length, ft [m]

<sup>9</sup> Shelf surface area is composed of bottom deck plus standard shelf complement for this model: (5) rows of 24-in. shelves

Insight Reach-in Multideck Narrow Merchandiser,  
2, 3, 4 and 5 Door Models

**Insight IRLN**  
Frozen Food / Ice Cream

**DOE 2017**  
Energy Efficiency  
Compliant


Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

Dimensions shown as in. and (mm).

Typical shelf complement shown:  
  
Five rows of 22-in. shelves spaced equally between bottom display pan and interior top panel.


**Optional kits (such as vent fans) add to the overall case height.**

**4-in. air gap is required between back of case and wall.**

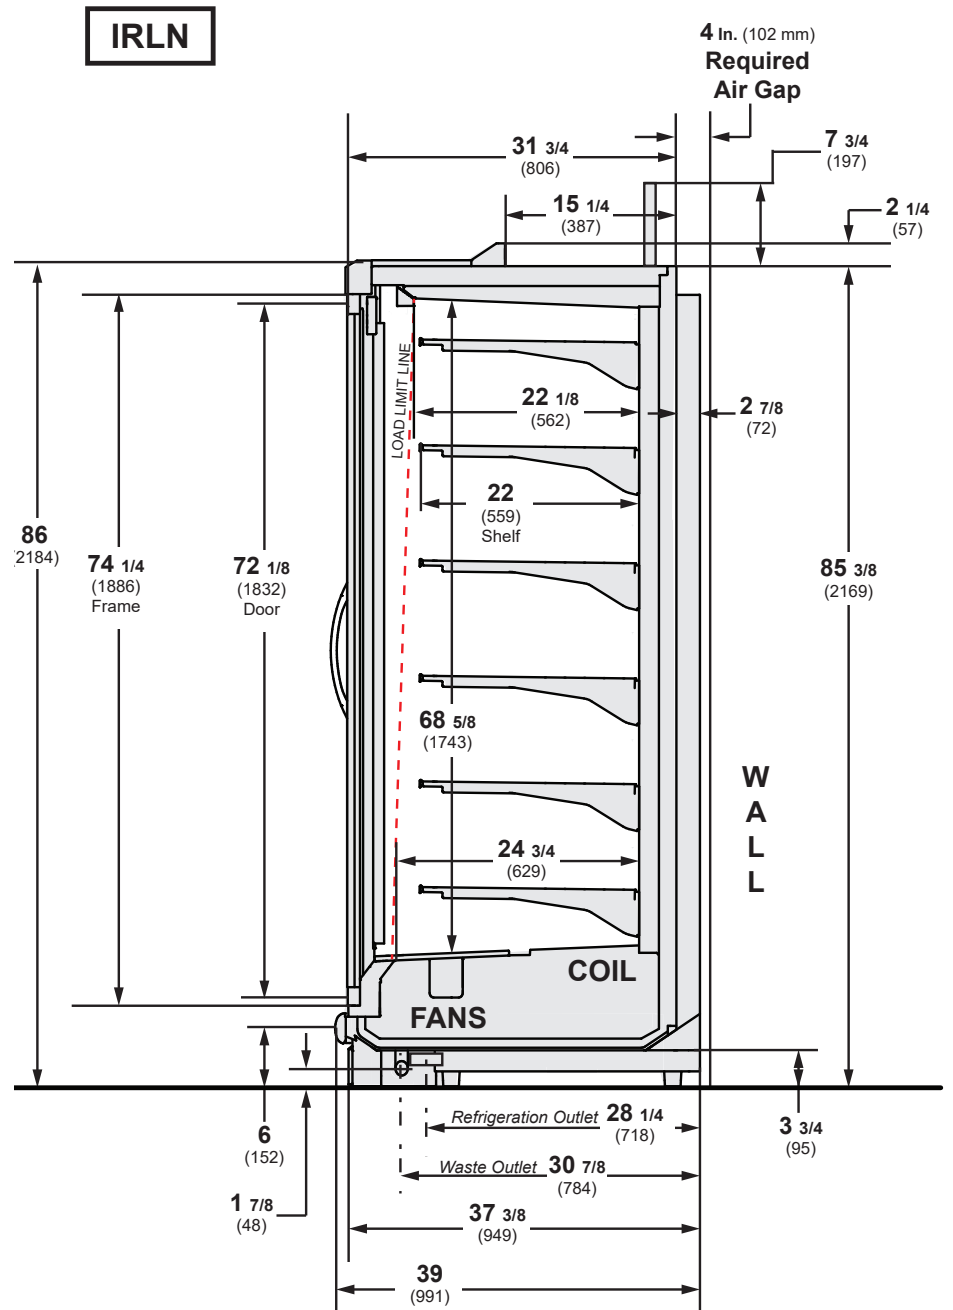

# Engineering Plan View

Dimensions shown as in. and (mm).

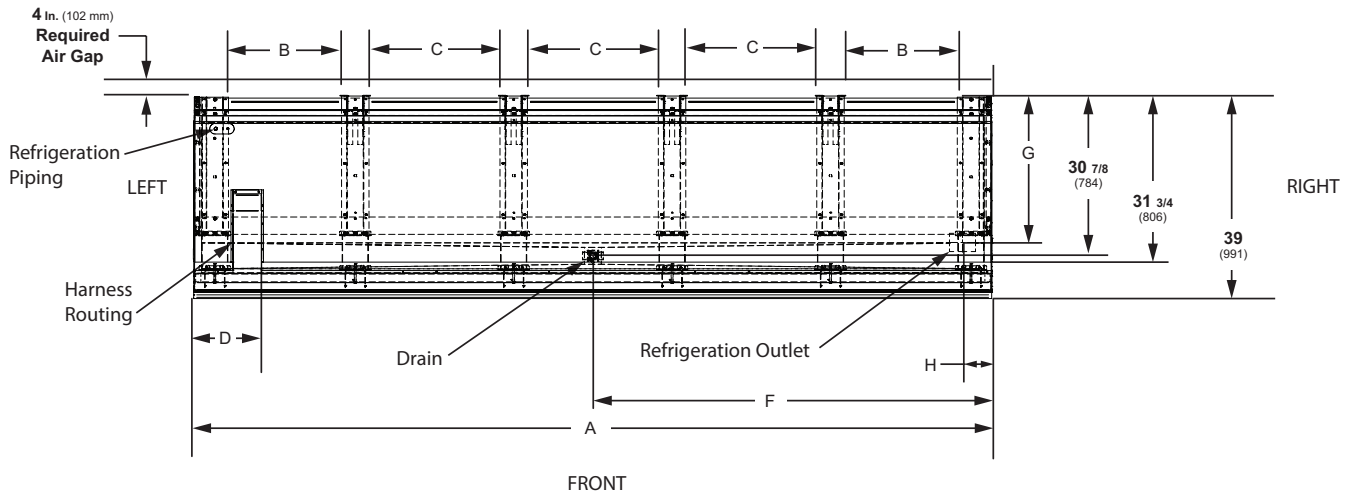

(5 Door Model shown above)

	2 Door	3 Door	4 Door	5 Door
<b>General</b>				
(A) Case Length (without ends or partitions) (Each end and insulated partition adds 2 in. (51 mm) to case line up.)	61 3/4 (1568)	92 1/8 (2340)	122 5/8 (3115)	153 3/8 (3896)
Maximum O/S dimension of case back to front (includes 2 7/8 for removable electric panel)	39 (991)	39 (991)	39 (991)	39 (991)
Back of case to front of splashguard	37 3/8 (949)	37 3/8 (949)	37 3/8 (949)	37 3/8 (949)
Width of Skid rail	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)
(B) Distance between edges of external legs and center legs	21 3/4 (552)	21 3/4 (552)	21 3/4 (552)	21 3/4 (552)
(C) Distance between edges of center legs	N/A	25 1/8 (638)	25 1/8 (638)	25 1/8 (638)
Distance between front legs and splashguard	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)	2 1/4 (57)
<b>Electrical Service (Field Electrical Wiring Connection)</b>				
(D) LH End of case to RH of Field Electrical/Control Panel	13 3/8 (340)	13 3/8 (340)	13 3/8 (340)	13 3/8 (340)
Length of electrical/control panel	61 3/4 (1568)	92 (2337)	122 5/8 (3115)	153 (3886)
(E) RH end of case to LH end of electrical/Control Panel	145 7/8 (3705)	145 7/8 (3705)	145 7/8 (3705)	145 7/8 (3705)
<b>Waste Outlets</b>				
(F) RH End of case to the center of waste outlet	23 3/8 (594)	54 1/8 (1375)	46 1/8 (1172)	76 5/8 (1946)
Back O/S of case to center of waste outlet(s)	30 7/8 (784)	30 7/8 (784)	30 7/8 (784)	30 7/8 (784)
Schedule 40 PVC drip pipe	1 3/8 (35)	1 3/8 (35)	1 3/8 (35)	1 3/8 (35)
<b>Refrigeration Outlet</b>				
(G) Back of case to center of refrigeration outlet	28 1/4 (718)	28 1/4 (718)	28 1/4 (718)	28 1/4 (718)
(H) End of case to center of refrigeration outlet	5 5/8 (143)	5 5/8 (143)	5 5/8 (143)	5 5/8 (143)

## Electrical Data

Number of Fans		2 dr	3 dr	4 dr	5 dr								
8-in (200 mm).		2	3	4	5								
						Amperes							
						2 dr	3 dr	4 dr	5 dr	Watts			
						2 dr	3 dr	4 dr	5 dr	2 dr	3 dr	4 dr	5 dr
<b>Evaporator Fan</b>													
120V	50/60Hz	Energy Efficient	0.60	0.90	1.20	1.50	36	54	72	90			
240V	50/60Hz	Energy Efficient Export	0.30	0.45	0.60	0.75	36	54	72	90			
<b>Frame Anti-Sweat Heaters (on fan circuit)</b>													
120V	50/60Hz		1.14	1.70	2.27	2.84	136.2	204.2	272.3	340.4			
240V	50/60Hz	Export	0.57	0.85	1.14	1.42	136.2	204.2	272.3	340.4			

## Lighting

ONLY LIGHTING CONFIGURATIONS THAT ARE COMPLIANT WITH THE U.S. DEPT. OF ENERGY (DOE) 2017 REGULATION ARE AVAILABLE FOR SALE FOR USE IN THE U.S.A.

						Amperes				Watts			
						2 dr	3 dr	4 dr	5 dr	2 dr	3 dr	4 dr	5 dr
<b>LED LIGHTING</b>													
<b>Standard Vertical LED Lighting (24V)</b>													
120V			0.35	0.53	0.71	0.89	42.5	63.8	85.1	106.4			
220V			0.19	0.29	0.39	0.48	42.5	63.8	85.1	106.4			
<b>Minimum Circuit Ampacity (fans, lights &amp; A.S.)</b>													
120V	50/60Hz		2.65	4.35	6.23	7.88							
240V	50/60Hz	Export	1.46	2.46	3.58	4.46							
<b>Maximum Over Current Protection 120V</b>						<b>20</b>	<b>20</b>	<b>20</b>	<b>20</b>				
<b>Maximum Over Current Protection 240V</b>						<b>15</b>	<b>15</b>	<b>15</b>	<b>15</b>				
<b>Defrost (Electric Defrost Heater)</b>													
120V		Drain Heaters	0.63	1.25	2.00	2.57	75	150	240	300			
220V	50 Hz	Export	0.34	0.76	1.22	1.53	84	168	269	336			
240V	50 Hz	Export	0.41	0.83	1.33	1.67	100	200	320	400			
<b>208V</b>	<b>1Ø</b>	Electric Defrost	6.72	10.08	13.46	16.82	1400	2100	2800	3500			
220V	50 Hz	Export	7.11	10.66	14.24	17.79	1564	2345	3133	3914			
240V	50 Hz	Export	7.76	11.65	15.53	19.42	1864	2796	3728	4660			

**ENDS or PARTITIONS**

*Each standard end and each insulated partition adds 2 in. (51 mm) to case line up.*

**PHYSICAL DATA**

Merchandiser Drip Pipe (in.)	1 1/4
Schedule 40 PVC	
Merchandiser Liquid Line (in.)	3/8
Merchandiser Suction Line (in.)	5/8

**ESTIMATED SHIPPING WEIGHT †**

<b>Case</b>	<b>2 Door</b>	<b>3 Door</b>	<b>4 Door</b>	<b>5 Door</b>	<b>Solid End (each)</b>
<b>lb (kg)</b>	1026 (465)	1440 (653)	1837 (833)	2256 (1023)	60 (27)

† Actual weights will vary according to optional kits included.

**Shelf Options**

Approved shelf sizes for standard (horizontal, 2-3 position brackets) displays:

- 18-inch
- 20-inch
- 22-inch
- 24-inch

Contact engineering for non-standard (4 position brackets or other) display recommendations.

Minimum number of Shelves: 4


Optimal number of Shelves: 5

Maximum number of Shelves: 8

Maximum number of Lighted Shelves: 0

Standard shelf complement for test purposes: (5) rows of 22-in. shelves evenly distributed vertically.

COMPLETE CASE WIRING

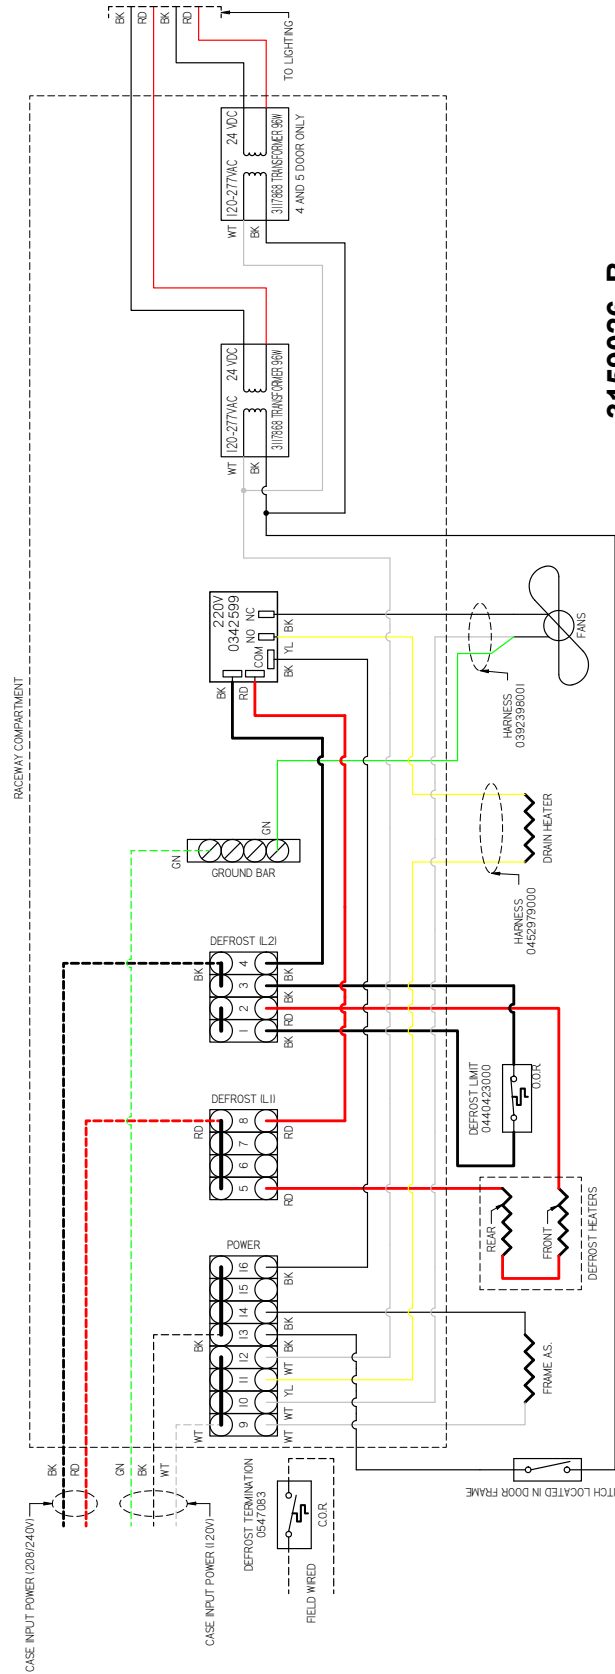

**3159026\_B**

WIRE COLOR	
UL COLOR CODES / ABBREVIATIONS	FACTORY IACA WIRE
RED = RD	FACTORY 10GA WIRE
BLACK = BK	FIELD WIRE
BLUE = BL	---
YELLOW = YL	---
GRAY = GT	---
WHITE = WT	---
GREEN = GN	---
BROWN = BN	---
ORANGE = OR	---
VIOLET = VT	---

- NOTES:
1. PRINTED DOCUMENT REQUIRED SETTING ALL COLORS BLACK & WHITE
  2. ALL WIRES 18 AWG UNLESS OTHERWISE NOTED
  3. IRI - ABBREVIATION FOR INSIGHT REACH IN
  4. DARK BLACK LINES IN TERMINAL BLOCKS REPRESENT REMOVABLE JUMPERS
  5. LED POWER SUPPLIES ARE LOCATED ON SEPARATE COMPONENT TRAY IN RACEWAY
    - 5.1. LED POWER SUPPLY TRAY IS LOCATED IN DOOR MODULE BOM
    - 5.2. LED POWER SUPPLY TRAY IS TO BE INSTALLED IN DOOR FRAME AREA
    - 5.3. FINAL ELECTRICAL CONNECTIONS TO BE MADE AFTER DOOR FRAME IS ATTACHED TO CASE

### **Estimating Refrigeration and Electrical Load (for comparison purposes only)**

#### **Case Btu**

To determine Btu for a case, refer to the performance data chart on Page 2. Select the type of remote refrigeration system (parallel or conventional), which will give Btu/hr/dr. Multiply this number by the total number of doors to determine Btu per hour.

#### **Case Electrical**

Refer to store legend to determine number of circuits. Lighting should be specified in store legend.

Fan electrical load for a case is computed by selecting the case model and fan voltage on Page 5. For example, a 4 door case uses 4 fans. In this instance, fans use 1.20 Amps, lights use 0.71 Amps, and the anti-sweat heaters use 2.27 Amps. The MCA listed on page 5 includes the fans, lights and anti-sweat heaters.

#### **Line Sizing — Refer to store legend.**

Hussmann Line Sizing Charts are engineered for use with Hussmann refrigeration equipment.



Scan the QR code with your mobile device to access additional product information or order parts.

Parts may also be ordered at:

**parts.hussmann.com**

**Call toll free: 1.855.487.7778**

---

### **Revision History**

Revision A: April 2023: Original Issue

Revision B: May 2023: Updated revision letter.