



The natural refrigerant case solution!

DOE 2017 Energy Efficiency Compliant



### Hussmann Corporation

12999 St. Charles Rock Rd. Bridgeton, MO 63044-2483 Ph: 800.592.2060

www.hussmann.com

©2023 Printed in U.S.A.

Item No. \_\_\_\_\_

# VRL3B3A

Self-Contained Reach-In, Bottom Mount Low Temperature Merchandiser

### Advanced Design

- Contemporary styling places maximum attention on merchandising
- Self-closing Innovator doors. Positive seal, torsion type closure system

#### Merchandising with Style

- Interior LED vertical lighting 4 columns
- Illuminated Exterior Flat Sign Panel

### **Smart Construction**

- · Frame rail fitted with leg levelers
- Controller with communication ability via MODBUS
- UL/ETL, NSF Type II and DOE 2017 certified

### **Innovative Refrigeration**


• Environmentally-friendly R290 hydrocarbon refrigerant that has zero ozone depletion potential and 3 GWP

### Options

- Stainless steel exterior/interior.
- Baskets, peg bar and hooks.
- · Additional display shelves available.
- Price tag molding and sign kit available.
- · Door locks, and shelf product stops.
- Alternate electrical plug configurations available.
- Left glass door opening is standard. Other options are available.
- · Solid fascia available
- · Various exterior colors, black or white interior
- Mullion (premium) lights
- Leveler leg
- Casters
- Seismic restraint kits

## VRL3B3A

Self-Contained Reach-In, Bottom Mount Low Temperature Merchandiser

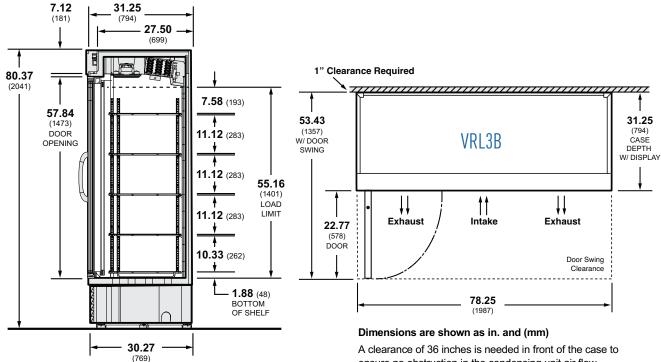

A clearance of 36 inches is needed in front of the case to ensure no obstruction in the condensing unit air flow. 1 inch clearance required at the top and rear of the case. Zero clearance is required on the sides of the case.

Model	Doors	L (int)	D	н	Cu/ft Capacity	Ref.	Volts	Run Amps	Noise	Cord Length	Weight
		L (ext)	D*	H**							
VRL3B	3	74.38" (1889 cm)	23.72" (704 cm)	55.16" (857 cm)	66.1	R-290	120 60/1	9.5	64.8 dB	9 ft. (2.74m)	877 lbs (398 kg)
		<b>78.25"</b> (1987 cm)	<b>31.25"</b> (704 cm)	<b>80.37''</b> (857 cm)							

\*Excludes door handles; \*\*Includes leveling pods

Bidding specifications





DATA SHEET For more detailed information scan or click above.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped. For additional resources, contact your representative or visit www.hussmann.com.



12999 St. Charles Rock Rd. Bridgeton, MO 63044-2483 Ph: 800.592.2060 www.hussmann.com

Dia

AIA #