

HUSSMANN®

Excel Merchandisers



microDS

DD5X5FRW

Excel Multi-Deck Natural Refrigerant Propane R290
Self-Contained Merchandiser with Front Roll-In and Glass Doors
for Deli, Dairy and Beverage Applications


www.hussmann.com



Hussmann Excel Multi-Deck Natural Refrigerant Propane R290 Self-Contained Merchandiser with Front Roll-In and Glass Doors for Deli, Dairy and Beverage Applications

DD5X5FRW

Only available with 5 doors.

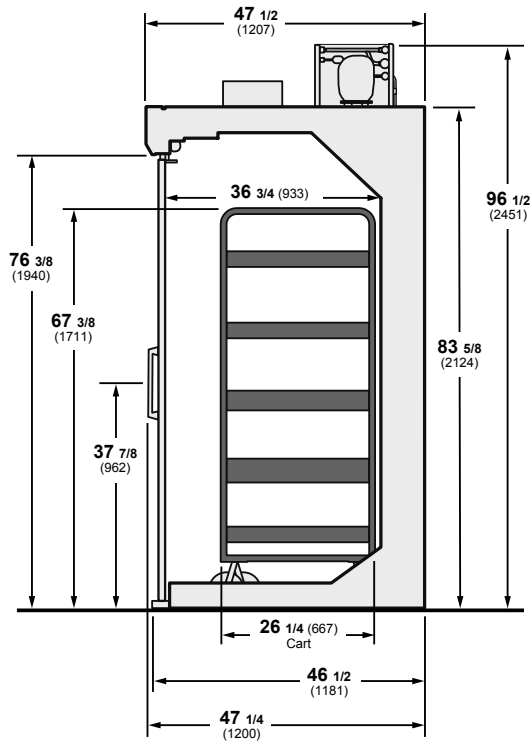

Gross Refrigerated Volume* - **20.46 ft³/ft**
(0.87 m³/m)

*per ANSI/AHRI 1200-2013 appendix C, Volume Calculation



NEMA Hubble
CS6361C




Features / Benefits

- Ideal for any medium temperature, high volume deli, dairy or beverage products
- Environmentally-friendly R290 hydrocarbon refrigerant that has zero ozone depletion potential and 3 GWP (Global Warming Potential)
- Merchandiser rejects heat through a continuous flow water-loop system at store level
- Water-loop system operates with cooling water between 50° and 115°F inlet temperature
- UL/EPH and DOE 2017 certified
- Available with Hussmann EcoVision II glass doors for better product visibility
- Standard LED lights reduce relamping and other maintenance costs
- **Innovative Refrigeration**
 - No heat required in doors or frames
 - Energy efficient coils standard
 - CoreLink controller remote performance monitoring available

Standard Features

- Color Interior/Exterior: Grey, White
- Exterior Sign Panel: None
- Shelves: None
- LED Lighting: Canopy
- Adjustable Leveling Legs: No
- Casters: No
- Power Cord: 50A/125V, UL/CSA NEMA Hubble CS6361C
- Hardwired: No
- Insulation: Polyurethane Foam - CFC Free

Plan View

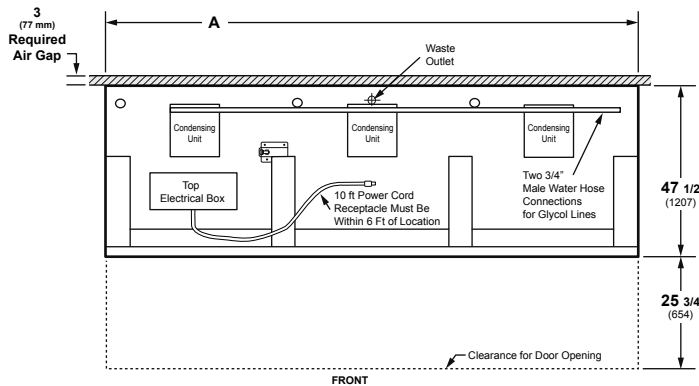

Dimensions	5 DOOR
A	147 3/4 (3753)

Note: Contact your sales representative for information on possible availability of additional case lengths

Note

Use Hussmann's technical data sheets to get precise dimensions for all store layout purposes.



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F (23.9°C) and 55% R.H.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.



Hussmann Corporation

12999 St. Charles Rock Rd.
Bridgeton, MO 63044-2483
Ph: 314.291.2000

www.hussmann.com