## **HUSSMANN®**

## Specialty



# DSFM

Medium Depth Service Merchandiser for Fresh Seafood Applications

## Hussmann Medium Depth Service Merchandiser for Fresh Seafood Applications


#### **DSFM**






Remote Lengths: 3', 4', 6', 8', 10', and 12' Wedges: 45° inside and outside wedges

(Consult factory for other wedge size availability.)

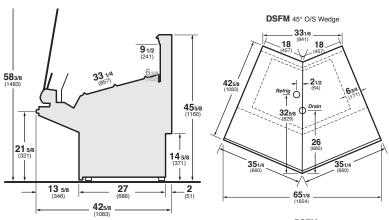

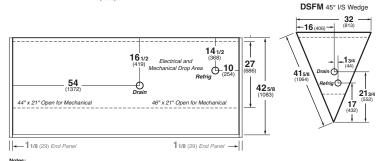

Notes: Contact your sales representative for information on possible availability of additional case lengths.

#### Features.

- Swing-out silver anodized glass hardware
- Straight, non-glare tempered glass
- Coil corrosion protective coating
- Humidified refrigeration system
- Heavy-duty rear wall coil
- Removable stainless steel interior wall and ice pans
- Brushed stainless steel rear ledge and exterior case back
- One 15 amp scale outlet
- Removable lift-up fan plenum
- 1" black vinyl cart bumper
- Thermostat installed
- Solid end panels
- Solar thermometer
- Suction stop installed
- Dual low maintenance clog resistant drain system
- Please reference color chart for choice of standard Hussmann paint and finish options (www.hussmann.com)

#### Options.

- 3" shorter interior rear wall height
- High volume/standard ice pan depths
- 15 amp duplex outlet
- Curved glass
- Non-glare curved glass
- Mock pedestals
- View end panels
- Rear platform step
- Adjustable height ice pans
- Optional base height
- Scale platform
- Wrapping board (Thermoplastic)
- Wrapping station
- Front mount ice trough or refrigerated self-service display (FMSS)
- LEDs lights may be used for ledge lights †
- Liquid line shut-off hand valve
- Flush systems (lower deck) manual or automatic
- Special exterior finishes\*

(consult your Hussmann sales representative)

#### Additional Information.

- Refrigerated Self-Service Case Front: FMSS
- Refrigerated Deep Service Fish Case: DSF
- Refrigerated Narrow Service Fish Case: DSFN



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

- \* Some optional features may need to be certified by UL, NSF, and/or other 3rd party certification agencies. Contact Hussmann for verification or questions for availability.
- † Only lighting configurations that are compliant with the U.S. Dept. of Energy (DOE) 2017 regulation are available for sale for use in the U.S.A.
- NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H. We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources, contact your representative or visit www.hussmann.com.



Intertek



#### Note.

Use Hussmann's technical data sheets to get precise dimensions for all store layout purposes.

### Hussmann Specialty

13770 Ramona Avenue Chino, California 91710-5423 Ph: 1.800.395.9229



