

MDN

Self-Contained, Narrow Depth Multi-Deck Medium Temperature Merchandisers

Advanced Design

- Maintenance-friendly automatic evaporation drain pan system
- Lower sound level - less than 60 dB (Anechoic Chamber)
- Inverter compressor technology that automatically adjusts the load according to the temperature of the interior cabinet
- Easy to service with cassette refrigeration system
- 115V/60Hz

Merchandising with Style

- Merchandising flexibility – shelves can be merchandised flat or at an angle
 - High pack-out in limited footprint allowing more product in the same space
 - Narrow profile case at 25.6" depth
 - View end panels provide increased visibility of product from the side
 - Canopy lighting
-

Innovative Refrigeration


- R-404a refrigerant
- DOE 2017 compliant
- Low maintenance and energy saving



MDN-3575A

Self-Contained, Narrow Depth Multi-Deck Merchandisers for Dairy, Deli and Produce Applications

MDN - Multi-Deck, Narrow Depth, Med Temp Merchandisers

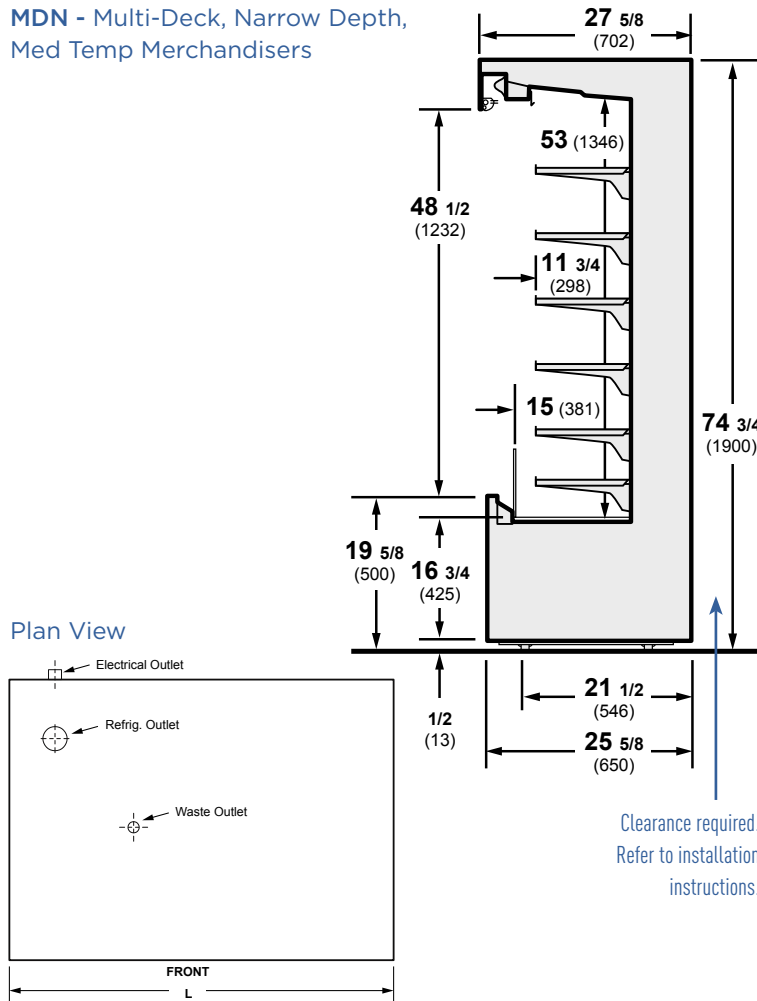

Standard Features.

- Color Exterior: Black
- Color Interior: Black
- Exterior Sign Panel: None
- View End Panels: Clear or Opague
- Shelves: 5
- LED Lighting: Canopy
- Adjustable Leveling Legs: Yes
- Casters: Yes
- Power Cord: 20A / 125V, NEMA L5-20P
- Hardwired: No
- NSF: Type II
- Air Discharge: Rear
- Insulation: Rigid polyurethane

Optional Accessories.

- Stainless Steel exterior and interior
- Additional display shelves available – Max of 6.
- Heavy-duty shelves.
- Price tag molding.
- Bumper – Front only or wrap around.
- Silk-screen for solid end panels: Black, white or silver on dual pane glass.
- Product stop kit (5 per case).
- Back lit sign kit.
- Night curtain.

Clearance required.
Refer to installation instructions.

Specifications

Model	Interior Dimensions			Exterior Dimensions			Cu. Ft. Capacity	Approx. Ship Wt. (lbs)
	L	D	H	L	D	H		
MDN-3575A	33-3/4"	11-3/4"	53"	35"	25-5/8"	74-3/4"	13	386
MDN-4775A	45-1/2"	11-3/4"	53"	46-7/8"	25-5/8"	74-3/4"	17.3	463

Model	Nom. HP	Refrig.	Hz/Ph	Volts	Electrical				Refrig.** Load (BTU/h)	A/C Load (BTU/h)	Energy Consumption (under AHRI 1200 conditions)
					Run Amps	Fuse Case	Amps	Lights			
MDN-3575A	1.7	R-404a	60/1	115	12.3 *	20A	5A	L5-20P	8700	11962	13.9 Kwh/day
MDN-4775A	1.7	R-404a	60/1	115	12.5 *	20A	5A	L5-20P	9349	12854	19.6 Kwh/day

* NSF-7 Type 2 Operating Conditions

** Refrigeration load calculated at 20° F evaporation and 110° F condensing temperature.

All Models



NEMA L5-20P

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 80°F and 55% R.H. Case is designed for holding pre-chilled product only.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources and warranties, contact your representative or visit www.hussmann.com.



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.



HUSSMANN®

Hussmann Corporation
12999 St. Charles Rock Rd.
Bridgeton, MO 63044-2483
Ph: 314.291.2000

www.hussmann.com