HUSSMANN®

E-COMMERCE GROCERY PROGRAM







ADVANTAGES

- Optimized for maximum tote staging capacity
- Glass doors provide excellent product and tote visibility
- French style doors provide ease of product access
- Top electric and refrigeration piping for easy installation
- Adjustable shelving allows for greater flexibility



KEY POINTS

- Freedom Line gives the flexibility of field installed refrigeration on top of the case or from a remote location
- Intentionally designed for backroom staging as well as front-of-store product merchandising
- Meets Type 2 ambient conditions and current NSF/ANSI standards







EGPF6 eGrocery Freedom Merchandiser

MERCHANDISING

- Shelving is adjustable in 1" increments to accommodate maximum number of totes, or combination of small rolling pallets and shelving
- · No drains required
- Six display levels for up to 54 totes

SERVICEABILITY

- Standard electrical connections on top for ease of service
- Electrical compartment can be moved to any location at the time of installation to help with future service

TECHNICAL INFORMATION



Scan the QR code with your mobile device to access technical data sheet on hussmann.com

STANDARD CURRENT TOTE SIZE

Length:	23.62"
Width:	15.75"
Total Height:	11.31"

46 3/4 (1187)

48 3/8

3 Inch (76 mm) Required Air Gap

ENERGY PERFORMANCE


• AHRI 1200 rating point for energy consumption

STORE CONDITIONS

- NSF Type I and Type 2 Certified
- Intertek and UL Listed
- DOE 2017 Certified

OPTIONS

- Optional condensate evaporator pan heater
- Color Options: Standard Colors (Black/White)
- Standard adjustable case shelving or standalone heavy-duty shelving options

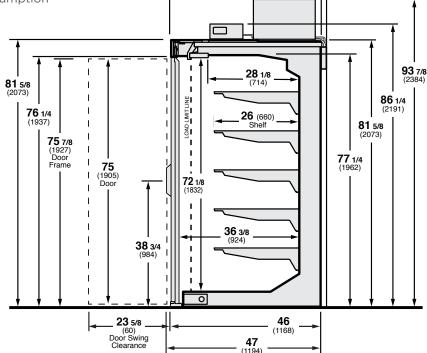

DOE 2017 Energy Efficiency Compliant Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 80°F and 55% R.H.

We reserve the right to change or revise specifications and product design in connection with any feature of our products.

Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources, contact your representative or visit www.hussmann.com.



Hussmann Corporation

12999 St. Charles Rock Rd. Bridgeton, MO 63044-2483 Ph: 800.592.2060

www.hussmann.com