HUSSMAnn[®]

Reach-In Merchandisers



RL-SP


Self-Contained Propane R-290 Natural Refrigerant Merchandiser

Reach-In with Innovator Doors and Low Front for Frozen Food Applications




Reach-In with Innovator Doors and Low Front for Frozen Food Applications

Available in 2, 3, 4 and 5 doors.

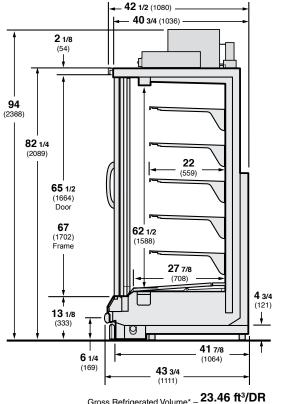

Gross Refrigerated Volume* -(0.66 m³/DR)

*per ANSI/AHRI 1200-2013 appendix C. Volume Calculatio

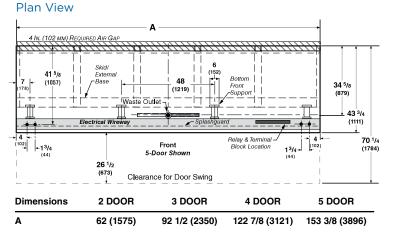

Note: Contact your sales representative for information on possible availability of additional case lengths.

Note

Use Hussmann's technical data sheets to get precise dimensions for all store layout purposes.



Features / Benefits

- Environmentally-friendly R-290 hydrocarbon refrigerant that has zero ozone depletion (ODP) potential and 3 Global Warming Potential (GWP)
- Ideal for any low temperature for frozen food products
- Available with Hussmann Innovator and Innovator III doors
- Merchandiser rejects heat through a continuous flow water-loop system at store level operating between 45° and 80°F inlet temperature
- UL, 4L EPH and DOE 2017 certified

- Superior Merchandising and Flexibility

- High pack-out in limited footprint allowing more product in the same space
- EcoShine II LED lights reduce relamping and other maintenance costs, and can be customized for optimal product lighting
- CoreLink controller with web browser interface to view performance data/logs and alarm information

Standard Features

- Color Interior/Exterior:
- Black, Grey, White None
- Exterior Sign Panel: - Number of Display Levels: 6
- LED Lighting: Mullion
- Adjustable Leveling Legs: No
 - No
- Hardwired:
 - Yes
- Insulation: Polyurethane Foam - CFC Free

Optional Accessories

- Lift-out bottom rack for easier cleaning/service
- Heavy-duty front panels and deck pans
- Additional display shelves available Max of 6 per door
- Bumper Front and ends
- Price tag molding
- Product stops

- Casters:

- Heavy-duty shelves



of the DOE 2017 energy efficiency standards.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F (23.9°C) and 55% R.H.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

Hussmann Corporation 12999 St. Charles Rock Rd. Bridgeton, MO 63044-2483 Ph: 800.592.2060

www.hussmann.com