HUSSMANN®

Specialty



R3 Family

R3HV-M/F-EP CR3HV-M/F-EP

3 Zone, High Volume Service Top and Self-Service Front Merchandiser with Gravity Coil and Rear Storage for Meat or Seafood (non ice) - Curved or Straight Glass

Enhanced Performance with OptiCool™ Technology

R3HV-M/F-EP, CR3HV-M/F-EP

Increase shelf life. Save on energy[‡]



For optimum performance, reference the merchandising requirements †

Enhanced performance with **OptiCool**[™] Technology

Reduces dehydration by 60%±

- Increases humidity by 12%‡
- Reduces temperature variance‡

Reduced system complexity, costs

- Simple installation
- All DX refrigeration at +28° F evap
- No glycol pump station required

EcoShine II Plus LEDs (Standard)

• 85+ CRI for bringing out natural colors (especially meat, deli and seafood) Diffused lighting eliminates pixilation,



- hot spots on product packaging Increased reliability with industry leading IP67 certification


Remote Lengths: 4', 6', 8', and 12'




Clear View


Heated air sweep eliminates glass sweating to provide clear, unobstructed food product views

Allows for self-service, service and extra storage all in a small footprint

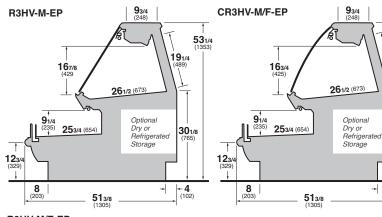

R3HV-M/F-EP +2 Self Service **9**3/4





Features.

- Non-glare lift up glass (standard R3, optional -CR3)
- Adjustable legs
- Service meat gravity and conduction coil system
- Service seafood gravity coil and conduction coil (non ice) - Snap-on, stainless steel lower rear panel
- Energy efficient fans
- Ecoshine II IP67 rated LED canopy and shelf lights
- Black interior (self-service)
- Stainless steel interior (service)
- Digital thermostat/suction stop (service)
- EPR (refrigerated self-service)
- Front air sweep (service)
- Please reference color chart for choice of standard
- Hussmann paint and finish options (www.hussmann.com)

Options.

- Coil corrosion protective coating (R3HV-F, CR3HV-F)
- Additional self-service height: +2"
- Stainless steel interior (self-service)
- White interior
- Dry or refrigerated rear storage
- Thermoplastic wrapping boards
- Scale shelf
- Mirrored rear doors
- Solid end panels
- Special interior and exterior finishes
- Custom lengths and options*
- (consult your Hussmann sales representative)

Additional Information.

- Hot Service with Self-Service Front: R3H, CR3H, R3H-HF or CR3H-HF
- Service Deli with Self-Service Front: R3D or CR3D
- Service Bakery with Self-Service Front: R3B or CR3B
- Service Prep Top w/ Self-Service Front: R3P or CR3P
- Service Meat/Seafood with Self-Service Front: R3-MF or CR3-MF
- High Volume Wide or Narrow Service Deli with Self-Service Front: R3HV-WD or R3HV-ND or CR3HV-WD or CR3HV-ND

High Volume Service Bakery with Self-Service Front: R3HV-WB or CR3HV-WB or R3HV-NB or CR3HV-NB

DOE 2017 ergy Efficiency Compliant

531/4 (1353)

191/4

303/4

+ **4** (102)

1/8 (29)

+

Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

- * Some optional features may need to be certified by UL, NSF, and/or other 3rd party certification agencies. Contact Hussmann for verification or questions for availability
- + For optimum performance product must be in direct contact of the deck.
- Reference detailed merchandising requirements located in the Installation guide d www.hussmann.com
- ‡ Performance results based on equivalent standard Hussmann models

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H. We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.



Note.

Use Hussmann's technical us data sheets to get precise dimensions for all store layout purposes.

HUSSMAI

48 72 96 (1219) (1829) (2438)

144 (3658)

www.hussmann.com

Hussmann Specialty 13770 Ramona Avenue Chino, California 91710-5423

Ph: 800 395 9229

R3HV-M/F-EP CR3HV-M/F-EP 032417

