

## VRL

### Self-Contained, Reach-In Bottom Mount, Low Temperature Merchandiser

---

#### Advanced Design

- Contemporary styling places maximum attention on merchandising
- Self-closing Innovator doors. Positive seal, torsion type closure system
- Triple-pane thermal insulated glass door assemblies
- Magnetic door gaskets of one-piece construction, removable without tools for ease of cleaning
- Merchandiser can be placed against wall with 1-inch min. open space behind the back of the case - no air gap is required behind the case
- Digital display in center of case air grill

#### Merchandising with Style

- Doors and frames available in standard colors — black or gray
- Interior LED vertical lighting
- Illuminated Exterior Flat Sign Panel
- Improved visibility due to an additional 4" of glass for increased visibility inside the case
- Each door section includes 4 shelves and a merchandisable bottom rack; more shelves can be ordered as an option
- PTM is optional

#### Smart Construction

- Frame rail fitted with leg levelers
- Controller with communication ability via MODBUS
- Unit completely pre-wired at factory
- 208-230/60Hz single phase, 20 amp dedicated outlet; cord and plug set included
- VRL3 utilizes a dual compressor system rated at 3/4HP each
- UL/ETL, NSF Type II and DOE 2017 certified

#### Innovative Refrigeration


- Environmentally-friendly R290 hydrocarbon refrigerant that has zero ozone depletion potential and 3 GWP (Global Warming Potential)
- High capacity, factory-balanced refrigeration system capable of maintaining -10°F temperature
- State-of-the-art evaporator and condenser fan motors providing more consistent volume of air which produces less heat, reduces energy consumption and provides greater reliability
- Bottom-mounted condensing unit positioned for easy maintenance
- Automatic defrost system time-initiated, temperature-terminated



For a matching side-by-side display of dairy, deli, beverages and wine, be sure to see the companion VRM series of medium temperature models.

# Self-Contained, Reach-In Bottom Mount Glass Door Merchandiser for Low Temperature Applications

- VRL1B** - Bottom Mount, Low Temp, 1-Glass Door Merchandiser
- VRL2B** - Bottom Mount, Low Temp, 2-Glass Door Merchandiser
- VRL3B** - Bottom Mount, Low Temp, 3-Glass Door Merchandiser

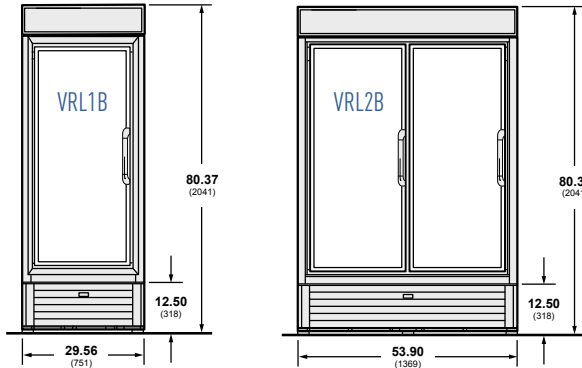


VRL1B and VRL2B  
NEMA L6-15P




VRL3B  
NEMA L6-20P



Increased interior dimensions for product visibility.

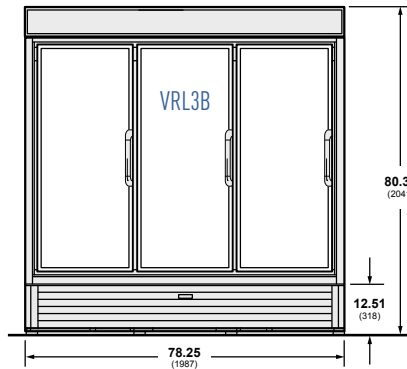

Increased interior dimensions for product visibility.

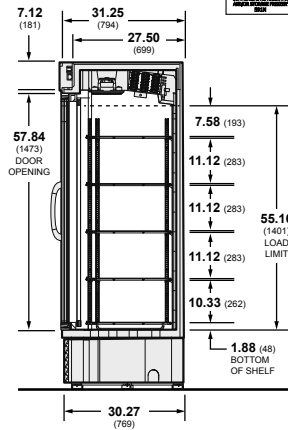

## Standard Features

- Color Exterior: Black, White, Gray
- Color Interior: White, Black
- Exterior Sign Panel: Lighted Flat Panel
- Shelves: 4
- LED Vertical Lighting: Yes
- Power Cord: Yes, 9ft
- Hardwired: No
- NSF: Type II
- Door(s): 1, 2, or 3 Innovator Doors
- Air Discharge: Front
- Insulation: CFC-Free

## Options

- Stainless steel exterior/interior.
- Adjustable leveling legs.
- Baskets, peg bar and hooks.
- Additional display shelves available.
- Price tag molding and sign kit available.
- Alarm buzzer, door locks, door guard and shelf product stops.
- Alternate electrical plug configurations available.
- Left glass door opening is standard. Other options are available.




Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 80°F and 55% R.H. Case is designed for holding pre-frozen product only.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources and warranties, contact your representative or visit [www.hussmann.com](http://www.hussmann.com).

## Plan Views

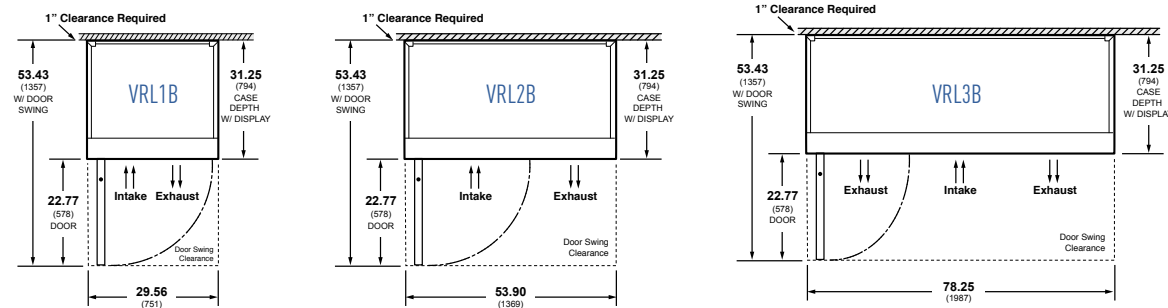

## Specifications

Model	Doors	Refrig.	Cu. Ft. Capacity	Interior Dimensions (Usable Inches <sup>3</sup> )			Exterior Dimensions		
				L	D	H	L	D*	H**
VRL1B	1	R-290	22.8	25.68"	23.72"	55.16"	29.56"	31.25"	80.37"
VRL2B	2	R-290	44.5	50.00"	23.72"	55.16"	53.90"	31.25"	80.37"
VRL3B	3	R-290	66.1	74.38"	23.72"	55.16"	78.25"	31.25"	80.37"

\* Depth dimension "D" excludes door handle.

\*\* Overall height includes leveling pods.

## Electrical

Model	Nom. HP	Hz/Ph	Volts	Run Amps	Fuse Amps	NEMA Plugs	Refrig. Load (BTU/h)	A/C Load (BTU/h)	Energy Consumption (kWh/day)	Approx. Ship Wt. (lbs)
VRL1B	3/4	60/1	208-230	4.1	15	L6-15P	1025	2043	9.1	362
VRL2B	1	60/1	208-230	5.0	15	L6-15P	2100	3550	15.10	631
VRL3B	(2) 3/4	60/1	208-230	9.5	20	L6-20P	2900	4900	21.12	877

## Hussmann Corporation

12999 St. Charles Rock Rd.  
Bridgeton, MO 63044-2483  
Ph: 314.291.2000



[www.hussmann.com](http://www.hussmann.com)