

HUSSMANN®

SELF-CONTAINED MERCHANDISER SOLUTIONS

Impact®



RLN-A / RMN-A

LOW AND MEDIUM TEMP REACH-IN MERCHANDISER WITH DOORS



ADVANTAGES

- Plug-and-play installation featuring self-contained factory-charged high-efficiency R-290 Microblock™ refrigeration system
- In addition to working as standalone units, these cases have the option to be connected to create lineups (requires acrylic partition kit)
- Designed to fit through standard 82" doorways
- Narrow footprint with the same high visibility merchandising as standard depth merchandisers
- Cases use less self-contained refrigeration units per length than competitors for higher efficiency



KEY FEATURES

- Microblock technology incorporates all components including the compressor, condenser, and evaporator into an all-in-one air-cooled factory-charged top-mounted refrigeration system
- Available in medium and low temperature configurations
- Standard LED mullion lighting
- Standard 24-inch shelves and Innovator™ doors for high stocking limit and high product visibility
- No drains required—condensate removal pan assembly included as standard

EVOLVE®
R-290



RMN5A



1.800.592.2060



www.hussmann.com

RLN-A / RMN-A Self-Contained Reach-In Merchandiser

AVAILABLE OPTIONS

- Acrylic partition kit (required for joining into a lineup)
- Lift-out bottom rack
- Heavy-duty front panels and deck pans
- Additional display shelf sizes
- Bumpers (front and ends)
- Price tag molding
- Product stops
- Contour fascia

SPECIFICATIONS

Low Temp. Models	RLN2A, RLN3A, RLN4A, RLN5A
Medium Temp. Models	RMN2A, RMN3A, RMN4A, RMN5A
Lighting	LED mullion lighting
Number of Display Levels	5 (4 shelves and base)
Refrigerant	R-290 (propane)

Model	Supply Power*	NEMA Plug	Microblock Unit per Case
RLN2A	120/208 VAC**	14-30P	1
RLN3A	120/208 VAC**	14-30P	2
RLN4A	120/208 VAC**	14-50P	2
RLN5A	120/208 VAC**	14-50P	3
RMN2A	120 VAC	5-15P	1
RMN3A	120 VAC	5-20P	2
RMN4A	120 VAC	5-30P	2
RMN5A	120 VAC	5-30P	2

*All units use single phase, 60 Hz power

**derived from 208Y/120 V / 3 phase / 60 Hz

NOTE Dimensions are in Inches (millimeters)


NOTE: Use Hussmann's technical data sheets to get dimensions for all store layout purposes.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75° F (23.9° C) and 55% R.H.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped. For additional resources, contact your representative or visit www.hussmann.com.

©2025 Hussmann Corporation

TECHNICAL INFORMATION





Scan or click QR code to access additional resources at hussmann.com

Available with 2,3,4, and 5 doors and in medium and low temperature configurations.

DIMENSIONS

Microblock™
Refrigeration
System

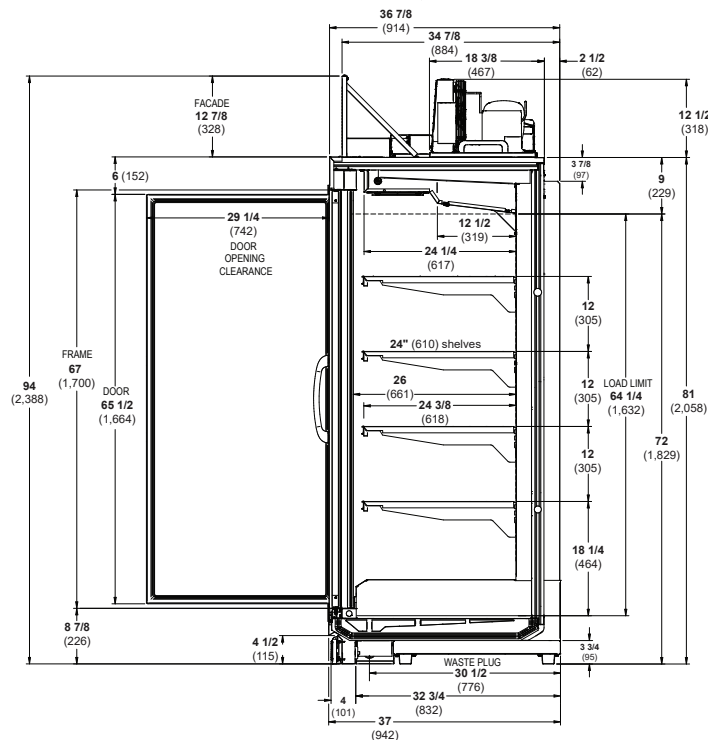

Model	RLN2A RMN2A	RLN3A RMN3A	RLN4A RMN4A	RLN5A RMN5A
Length	62 7/8 (1,571)	92 1/4 (2,345)	122 3/4 (3,118)	153 1/4 (3,892)

HUSSmann®

Hussmann Corporation
12999 St. Charles Rock Rd.
Bridgeton, MO 63044-2483
Ph: 1.800.592.2060

www.hussmann.com

PS_RLN5A_and_RMN5A_M001060_A_EN