




## TY-S

Entyce Self-Contained, Island and End, Multi-Deck Merchandisers

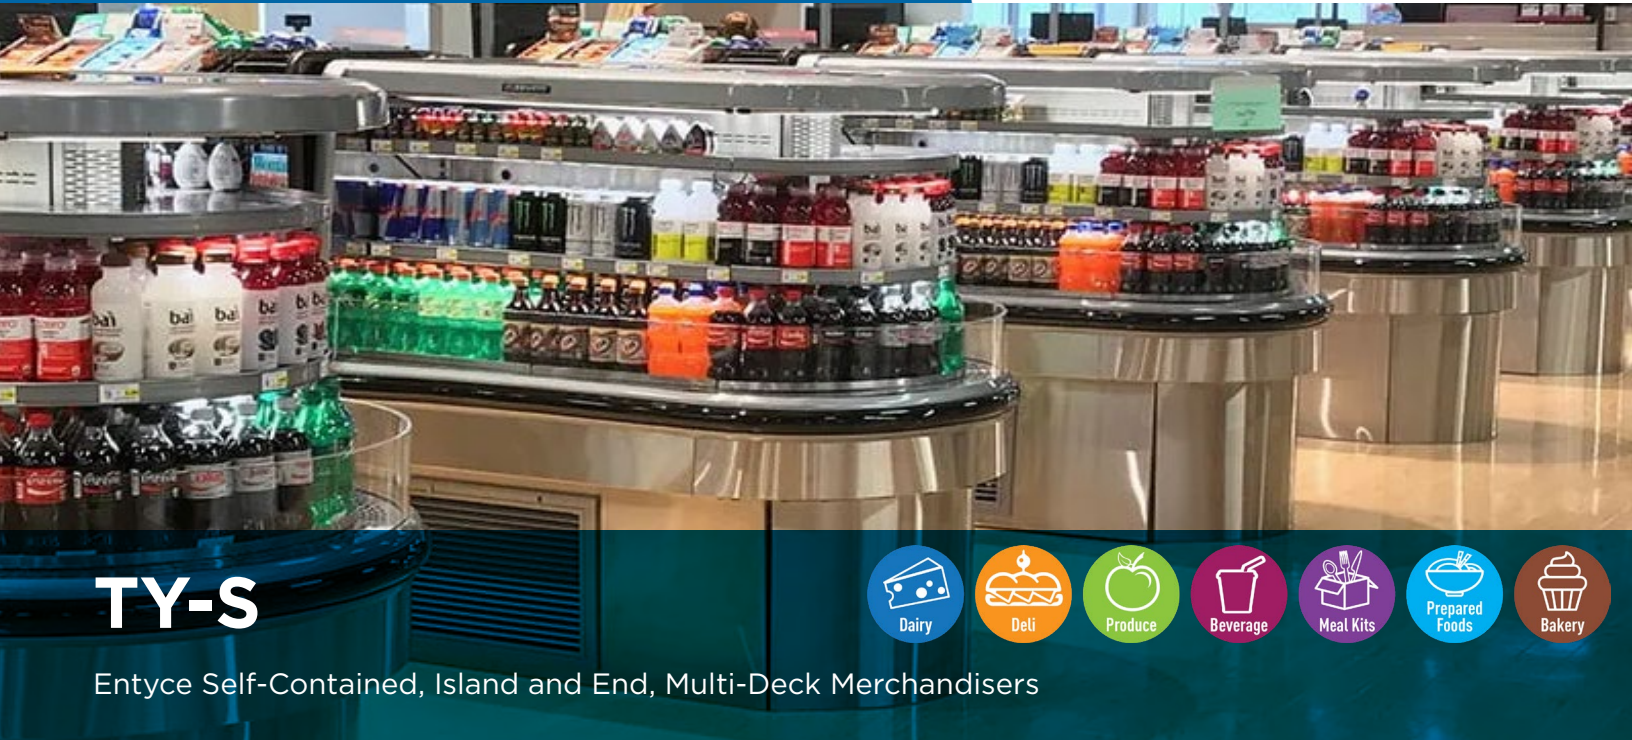

## ADVANTAGES

### Exceptional Merchandising

Open, cascading product draws shoppers in and drives sales

### More Packout

High pack-out in small footprint means more sales with less time on replenishment

### Product Flexibility

Perfect fit for multiple departments including Deli, Grab-n-Go, Beverage, or Produce



## KEY FEATURES

### Low GWP A2L Refrigerant

R-454C refrigerant meets all regulatory requirements and complies with the AIM Act

### Adjustable Shelving System

Endless merchandising flexibility with vertical shelf height adjustments



TY3-3x4.5E-SA end case



TY3-4x6I-SA island case



1.800.592.2060



www.hussmann.com

# TY-S Entyce Self-Contained, Island and End, Multi-Deck Merchandisers

## STANDARD

- Painted black exterior
- 2" black vinyl bumper
- Radius tempered glass perimeter
- 3500K LED canopy lights - 5 year warranty
- Energy efficient fan motors
- R-454C Low GWP A2L refrigerant
- Evap pan - floor sink not required
- Designed for use in both Type 1 and Type 2 (to be confirmed) environments


## OPTIONS

- 10" shelves (TY3-3)
- 8", 10" and 12" shelves (TY3-4)
- LED shelf lighting
- Solid surface top inlay
- Stainless or white interior
- Custom lengths and options\*  
(consult your Hussmann sales representative)


## TECHNICAL INFORMATION




Scan or click QR to access additional resources at [hussmann.com](http://hussmann.com)

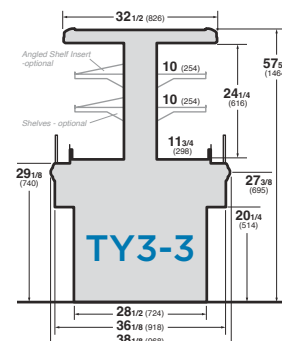

□ 3'x4.5' end (TY3-3X45E-SA)

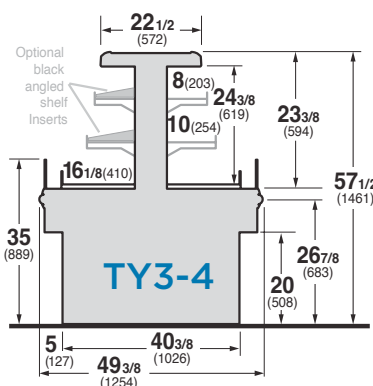

- 4'x4' end (TY3-4X4E-SA)
- 4'x6' island (TY3-4X6I-SA)
- 4'x8' island (TY3-4X8I-SA)
- 4'x10' island (TY3-4X10I-SA)

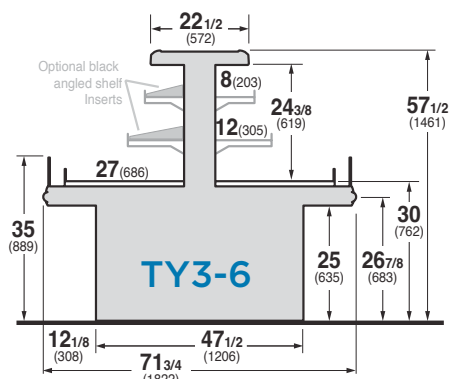

□ 6'x8' island (TY3-6X8I-SA)

Note Dimension are in Inches (millimeters)

| Model        | L               | D              | H              | Nom. HP | Ref.  | Hz/Ph | Volts    | Circuit Amps | Fuse Amps | NEMA Plug | Refrig. Load | A/C Load    |
|--------------|-----------------|----------------|----------------|---------|-------|-------|----------|--------------|-----------|-----------|--------------|-------------|
| TY3-3X45E-SA | 55-1/2" (1410)  | 38-1/8" (968)  | 57-5/8" (1464) | 1.28    | R454C | 60/1  | 208/240V | 18.8 A       | 30 A      | L14-30P   | 10200 BTU/h  | 15350 BTU/h |
| TY3-4X10I-SA | 121-1/2" (3086) | 49-3/8" (1254) | 57-1/2" (1461) | 3.26    | R454C | 60/1  | 208/240V | 39.4 A       | 50 A      | CS-6365-C | 26080 BTU/h  | 27941 BTU/h |
| TY3-4X4E-SA  | 48-5/8" (1235)  | 49-3/8" (1254) | 57-1/2" (1461) | 1.28    | R454C | 60/1  | 208/240V | 18.8 A       | 30 A      | L14-30P   | 10200 BTU/h  | 11079 BTU/h |
| TY3-4X6I-SA  | 73-1/2" (1867)  | 49-3/8" (1254) | 57-1/2" (1461) | 2.04    | R454C | 60/1  | 208/240V | 30.5 A       | 50 A      | CS-6365-C | 16320 BTU/h  | 17119 BTU/h |
| TY3-4X8I-SA  | 97-1/2" (2477)  | 49-3/8" (1254) | 57-1/2" (1461) | 2.66    | R454C | 60/1  | 208/240V | 35.0 A       | 50 A      | CS-6365-C | 21280 BTU/h  | 22513 BTU/h |
| TY3-6X8I-SA  | 96-1/2" (2452)  | 71-3/4" (1822) | 57-1/2" (1461) | 2.66    | R454C | 60/1  | 208/240V | 35.0 A       | 50 A      | CS-6365-C | 21280 BTU/h  | 25233 BTU/h |



**HUSSMANN®**

Hussmann Corporation  
12999 St. Charles Rock Rd.  
Bridgeton, MO 63044-2483  
Ph: 1.800.592.2060

[www.hussmann.com](http://www.hussmann.com)