

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

Item	Part #	Description	Wiring Item #	Item	Part #	Description	Wiring Item #
FAN ASSEMBLIES AND THERMOSTATS				LAMPS AND BALLASTS			
A.	4W Standard Fan Assembly		(1)	E.	0355716	Ballast, Electronic 2 lamps	(5)
	0392457	Fan Motor, Evaporator		F.		Fluorescent Lamp <i>Replace with like fixtures</i>	(6)
	0409513	Fan Blade, embossing toward motor		LED FIXTURES AND POWER SUPPLY			
B.	0411744	Standard Non-adjustable Defrost Thermostat	(2)	G.	0501213	Power Supply	(7)
C.	Optional Adjustable Refrigeration Thermostat		(3)	H.		LED Rail Fixture <i>Replace with like fixtures</i>	(8)
HEATERS							
D.	0496496	Heater, Anti-Sweat	(4)				

Data sheet-Elite-E1

Note: Revision F: Added high glide refrigerant note. Other changes marked by bar, underline or circle.


Engineering Plan Views





PHYSICAL DATA	
Merchandiser Drip Pipe (in.)	1 1/2
Merchandiser Liquid Line (in.)	3/8
Merchandiser Suction Line (in.)	7/8


E1 Delicatessen Precut & Packaged Produce

04-2010

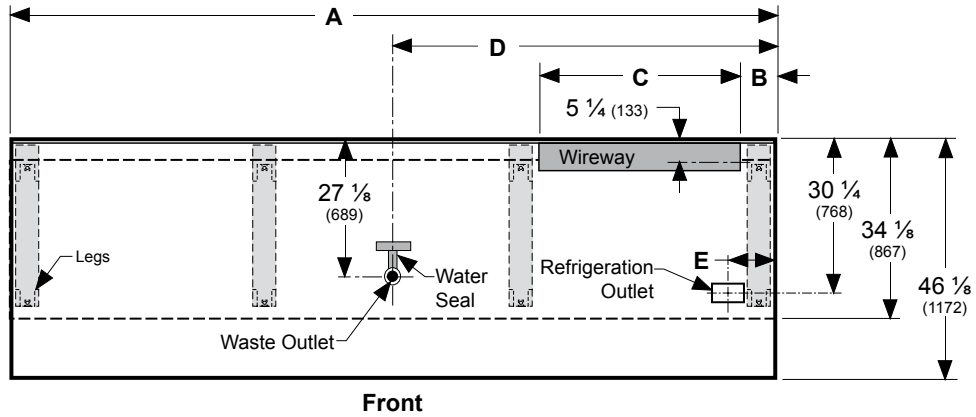Dimensions shown as inches and (mm).




	4 ft	6 ft	8 ft	12 ft
General				
(A) Case Length (<i>without ends or partitions</i>)	48 1/4 (1226)	72 3/8 (1838)	96 3/8 (2448)	144 1/2 (3670)
<i>NOTE: Each end or insulated partition adds 1 inch to lineup.</i>				
Maximum O/S dimension back to front (<i>with bumper</i>)	46 1/8 (1172)	46 1/8 (1172)	46 1/8 (1172)	46 1/8 (1172)
Back of case to front of front panel	34 1/8 (867)	34 1/8 (867)	34 1/8 (867)	34 1/8 (867)
RH end of case to outside edge of external support	1 3/8 (35)	1 3/8 (35)	1 3/8 (35)	1 3/8 (35)
Distance between edges of external support and center support	NA	28 1/2 (724)	40 1/2 (1029)	40 1/2 (1029)
Distance between edges of center supports	NA	NA	NA	43 7/8 (1114)
Distance between edges of external supports	37 (940)	NA	NA	NA
Electrical Service  (<i>Electrical Field Wiring connection point</i>)				
(C) Length of electrical wireway	34 1/2 (876)	26 (660)	38 (965)	38 (965)
RH End of case to center of farthest knockout	12 1/4 (311)	12 1/4 (311)	12 1/4 (311)	12 1/4 (311)
Back of case to center of end knockout	5 1/4 (133)	5 1/4 (133)	5 1/4 (133)	5 1/4 (133)
(B) RH End of case to RH end of raceway	6 7/8 (175)	6 7/8 (175)	6 7/8 (175)	6 7/8 (175)
Waste Outlet 				
(D) RH End of case to the center of waste outlet	24 1/8 (613)	24 1/8 (613)	24 1/8 (613)	72 1/4 (1835)
LH End of case to the center of waste outlet	24 1/8 (613)	48 1/4 (1226)	72 1/4 (1835)	72 1/4 (1835)
Back O/S of case to center of waste outlet	27 1/8 (689)	27 1/8 (689)	27 1/8 (689)	27 1/8 (689)
Water Seal 				
Edge of water seal to center of waste outlet	4 (102)	4 (102)	4 (102)	4 (102)
Schedule 40 diameter of the drip pipe	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)
<i>(Field installed water seal outlets, tees, and connectors are shipped with the merchandiser.)</i>				
Refrigeration Outlet 				
Back of case to center of refrigeration outlet	30 1/4 (768)	30 1/4 (768)	30 1/4 (768)	30 1/4 (768)
(E) RH end of case to center of refrigeration outlet	9 3/8 (238)	9 3/8 (238)	9 3/8 (238)	9 3/8 (238)



Husmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.



Dimensions shown as inches and (mm).

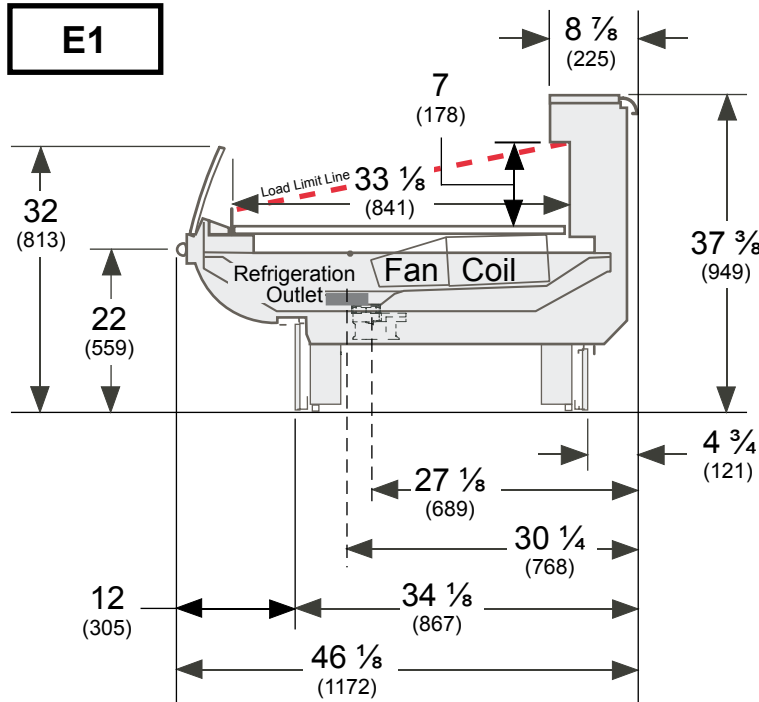

Estimated Charge **		E1	
4 ft	0.8 lb 13 oz	0.4 kg	
6 ft	1.2 lb 19 oz	0.5 kg	
8 ft	1.5 lb 24 oz	0.7 kg	
12 ft	2.0 lb 32 oz	1.9 kg	

**This is an average for all refrigerant types. Actual refrigerant charge may vary by approximately half a pound (8 oz/0.2 kg).

NSF Certification

This merchandiser model is manufactured to meet NSF/ANSI (National Sanitation Foundation) Standard #7 requirements for construction, materials & cleanability.

REFRIGERATION DATA

Note: This data is based on store temperature and humidity that does not exceed 75 (°F) and 55% R.H.

	E1§
Discharge Air (°F)	27
Evaporator (°F)	20
Unit Sizing (°F)	18
§ Average evaporator temperature shown. Use dew point for high glide refrigerants for unit sizing. Care should be taken to use the dew point in PT tables for measuring and adjusting superheat. Adjust evaporator pressure as needed to maintain discharge air temperature shown.	
Btu/hr/ft	E1
Parallel	490
Conventional	525

DEFROST DATA

	E1
Frequency (hr)	12
Defrost Water (lb/ft/day)	8
(± 15% based on case configuration and product loading).	
OFFTIME	E1
Temp Term (°F)	43
Failsafe (minutes)	90
ELECTRIC OR GAS Not Recommended	
Standard Defrost Thermostat	
Close on rise: close 48°F – open 33°F	

CONVENTIONAL CONTROLS

Low Pressure Backup Control	
CI/CO*	E1
Temp (°F)	13 / 3
Indoor Unit Only, Pressure Defrost Termination Not Recommended	
*Use a Temperature Pressure Chart to determine PSIG conversions.	

Elite E1 Delicatessen Precut & Packaged Produce
--

Electrical Data

	4 ft	6 ft	8 ft	12 ft				
Number of Fans — 4W	1	2	2	3				
	Amperes				Watts			
	4 ft	6 ft	8 ft	12 ft	4 ft	6 ft	8 ft	12 ft
Evaporator Fans								
120V 60Hz Standard	0.31	0.62	0.62	0.93	24	48	48	72
120V 50Hz Standard	0.38	0.76	0.76	1.14	27	54	54	81
230V 60Hz Export	NA							
230V 50Hz Export	NA							
120V 60 Hz Energy Efficient	NA							
230V 60Hz Energy Efficient	NA							
Cycling Anti-sweat Heaters	0.13	0.26	0.26	0.39	16	32	32	48
Minimum Circuit Ampacity								
120V 60Hz Standard	0.64	1.08	1.08	1.52				
120V 50Hz Standard	0.71	1.22	1.22	1.73				
230V 60Hz Export	NA							
230V 50Hz Export	NA							
120V 60 Hz Energy Efficient	NA							
230V 60Hz Energy Efficient	NA							
Maximum Over Current Protection 120V	20	20	20	20				
Maximum Over Current Protection 230V	NA							
Standard Lighting (T-8 fluorescent)								
None								
<p>ONLY LIGHTING CONFIGURATIONS THAT ARE COMPLIANT WITH THE U.S. DEPT. OF ENERGY (DOE) 2017 REGULATION ARE AVAILABLE FOR SALE FOR USE IN THE U.S.A.</p>								
Optional Lighting (T-8 fluorescent)								
1 Row Rail Lights	0.49	0.49	0.49	0.71	59	59	59	86
1 Row Ledge Lights	0.49	0.49	0.49	0.71	59	59	59	86
Optional EcoShine II LED Lighting								
1 Row Rail Lights	0.09	0.13	0.17	0.26	10.2	15.3	20.5	30.7

Please note: some combinations of fluorescent lights on this case model may not be compliant with DOE 2017 and may not be available to order in the US and Canada. More lighting options are available with LED lights. The Hussmann Product Configurator will not allow lighting options that do not comply with the DOE 2017 standards.

Product Data

<i>Recommended Usable Cube</i> ¹ (Cu Ft/Ft)	1.04 ft ³ /ft (0.10 m ³ /m)
<i>AHRI Total Display Area</i> ² (Sq Ft/Ft)	3.05 ft ² /ft (0.93 m ² /m)
<i>Shelf Area</i> ³ (Sq Ft/Ft)	2.76 ft ² /ft (0.84 m ² /m)


- ¹ AHRI Refrigerated Volume less shelving and other unusable space: Refrigerated Volume/Unit of Length, ft³/ft [m³/m]
- ² Computed using AHRI 1200 standard methodology: Total Display Area, ft² [m²]/Unit of Length, ft [m]
- ³ Shelf surface area is composed of bottom deck plus standard shelf complement, as shown in the Hussmann *Product Reference Guide*. The standard shelf complement for this model is *NONE*.

ESTIMATED SHIPPING WEIGHT ⁴					
Case	<i>4 ft</i>	<i>6 ft</i>	<i>8 ft</i>	<i>12 ft</i>	Solid End
					<i>(each)</i>
lb (kg)	400 (181)	600 (272)	800 (363)	1000 (454)	75 (34)

⁴ Actual weights will vary according to optional kits included.


Fan Wiring Offtime Defrost

- Fans**
- 4 Ft Case Has 1 Fan
 - 6 Ft Case Has 2 Fans
 - 8 Ft Case Has 2 Fans
 - 12 Ft Case Has 3 Fans

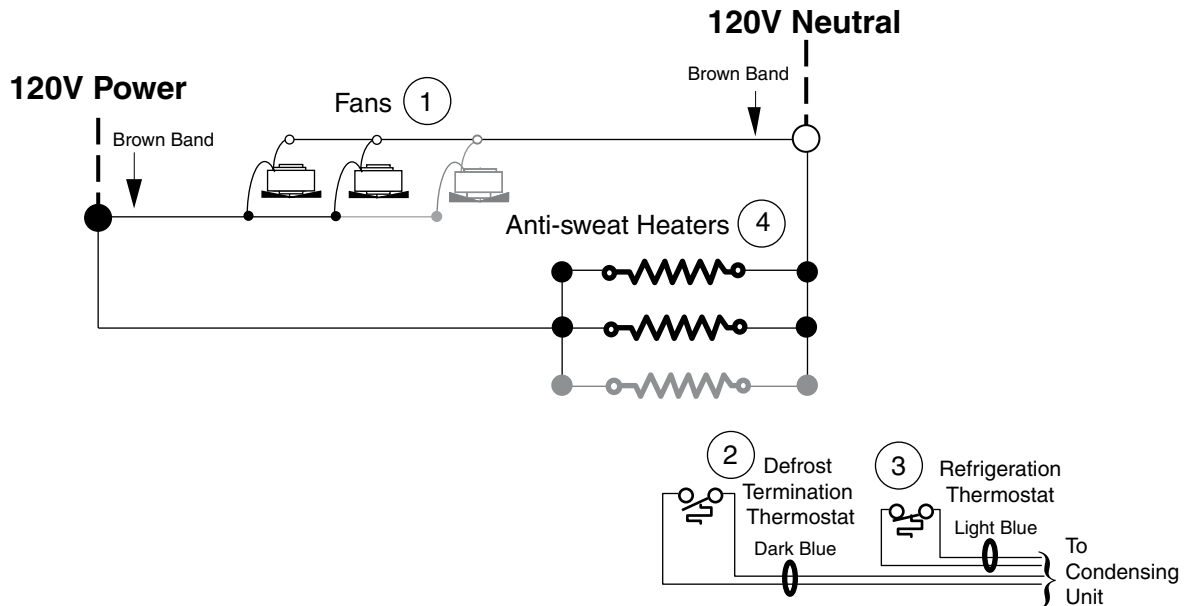

Receptacle

Electric Service Receptacle

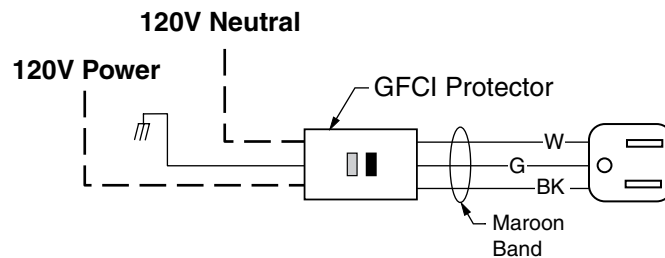

WARNING

All components must have mechanical ground, and the merchandiser must be grounded.

Circled Numbers = Parts List Item Numbers


Grayed components in 12 foot models only.

R = Red Y = Yellow G = Green BL = Blue LB = Light Blue DB = Dark Blue BK = Black W = White


● = 120V Power ○ = 120V Neutral ⊥ = Field Ground ≡ = Case Ground

Light Circuits

Optional Fluorescent Lighting: 1 Row Ledge or 1 Row Rail

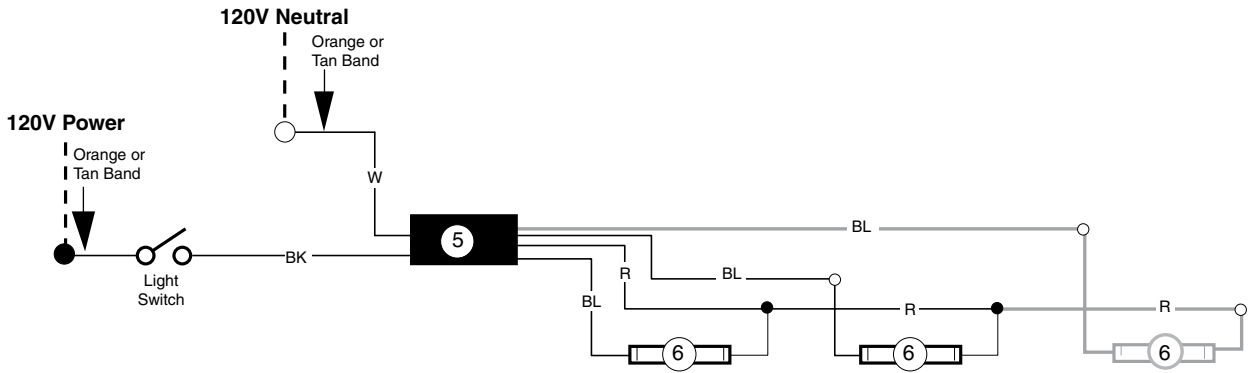

EcoShine II LED Rail Lighting – 1 Row

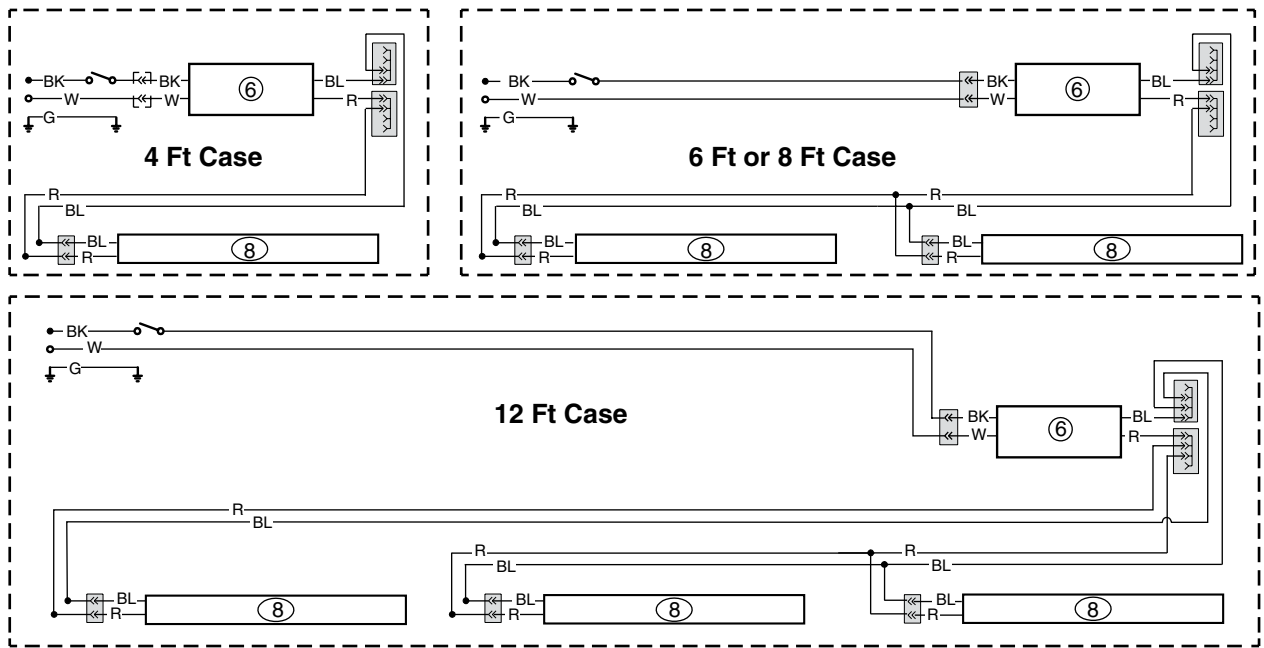

WARNING

All components must have mechanical ground, and the merchandiser must be grounded.

Circled Numbers = Parts List Item Numbers

Grayed components in 12 foot models only.

R = Red Y = Yellow G = Green BL = Blue BK = Black W = White

● = 120V Power ○ = 120V Neutral