

IMPORTANT for INSTALLER!


Donut GASKET must be installed ON EACH END as shown.

INSTALLER IS RESPONSIBLE for properly joining and installing merchandisers as described in Reach-In instruction, P/N 0387183.




Use only one Gasket Pad Sealer for each case joining. (for Right End only)


**RL / RM
RMF
RLN / RMN**

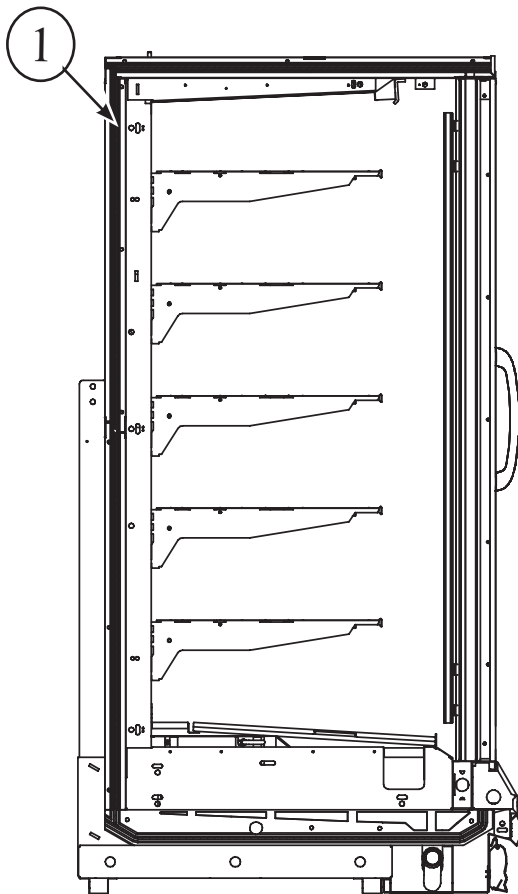Left End





F
R
O
N
T

-  ① Donut
-  ② .906 in. x 1/2 in.
-  ③ 1/2 in. x 1/4 in.



Right End

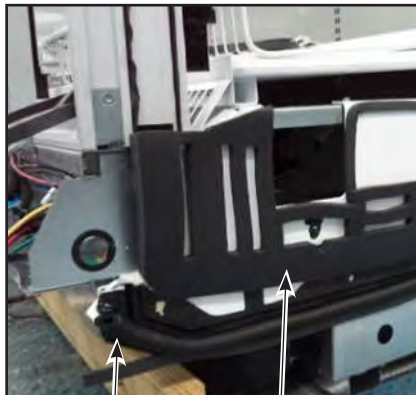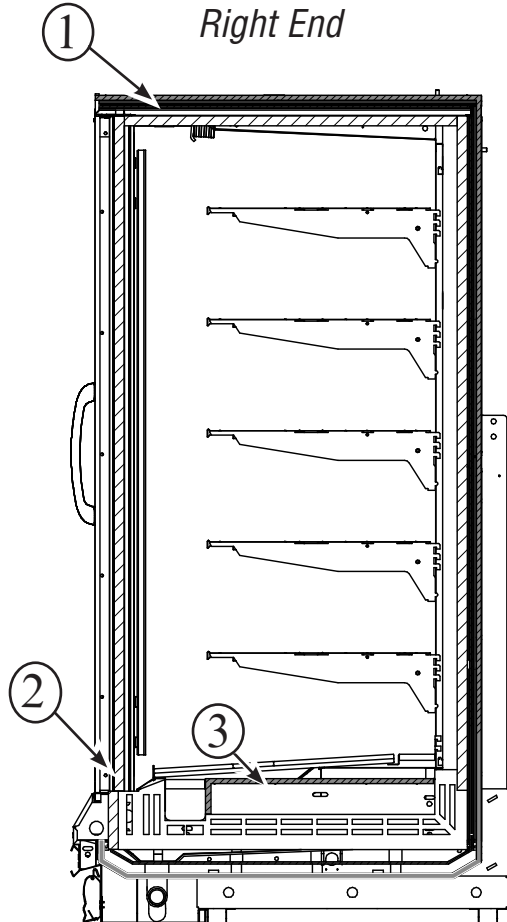

Overlap Gasket Pad Shoe Sealer