

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

Item	Part #	Description	Wiring Item #	Item	Part #	Description	Wiring Item #
FAN ASSEMBLIES				LAMPS AND BALLASTS			
12 Ft				E.	Ballast, Electronic		(5)
A.	7W Standard Energy Efficient Fan Assembly	(1)		0480130	2 lamps (BA.4481676)		
	0477654	Fan Motor, Evaporator (MO.4410545)		0480131	3 lamps (BA.4481654)		
	0142780	Fan Blade (FB.0142780)		0480132	4 lamps (BA.4481677)		
THERMOSTATS				F.	Fluorescent Lamp		(6)
B.	0411744	Standard Non-adjustable Defrost Thermostat (CT.0411744)	(2)		<i>Replace with like fixtures</i>		
C.		Optional Adjustable Refrigeration Thermostat	(3)	LED FIXTURES AND POWER SUPPLY			
HEATERS				G.	0501213	Power Supply (EP.4481861)	(7)
D.		Canopy Anti-Sweat Heater	(4)	H.		LED Canopy Fixture	(8)
	0512503	12 ft (HE.4851178)				<i>Replace with like fixtures</i>	
				I.		LED Shelf Fixture	(9)
						<i>Replace with like fixtures</i>	

NOTE: For LED lighting parts contact your Hussmann service representative at 1-800-922-1919. Please have your model and serial number available. Descriptions including size and color are at WWW.HUSSMANN.COM/SERVICEANDPARTS.

Data sheet-Excel-C2NX-E

Note: Revision K: Added high glide refrigerant note. Other changes marked by bar, underline or circle.

Engineering Plan Views


PHYSICAL DATA	
Merchandiser Drip Pipe (in.)	1 1/4
Merchandiser Liquid Line (in.)	3/8
Merchandiser Suction Line (in.)	7/8

Dairy/Delicatessen Precut & Packaged Produce

Dimensions shown as inches and (mm).

C2NX

01-2005

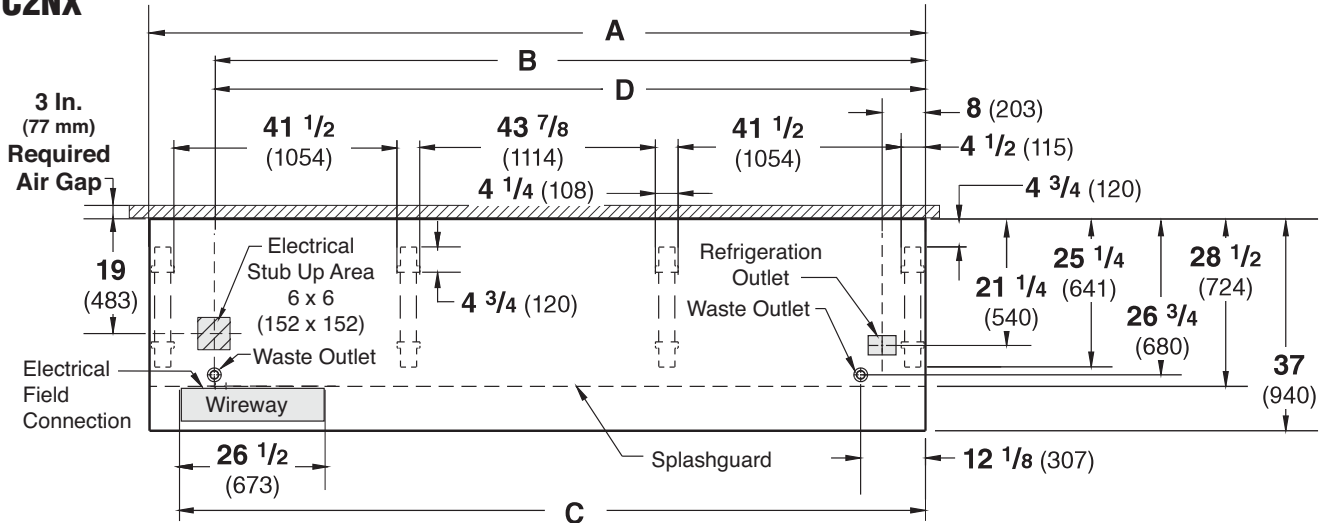

NOTE: Case-to-Case Electrical Connections are made IN FRONT OF SPLASHGUARD.

	12 ft
General	
(A) Case Length <i>(without ends or partitions)</i> <i>(Each end and insulated partition adds 1 1/2 in. (38 mm) to case line up.)</i> Maximum O/S dimension of case back to front <i>(includes bumper)</i>	144 1/2 (3670)
Back of case to front of splashguard	37 (940)
Back of case to O/S edge of front leg	28 1/2 (724)
Distance between edges of external legs and center legs	25 1/4 (641)
Distance between edges of center legs	41 1/2 (1054)
Distance between front legs and splashguard	43 7/8 (1114)
	2 3/4 (70)
Electrical Service <i>(Electrical Field Wiring connection point)</i>	
(B) RH End of case to center of stub up area	132 3/8 (3363)
Back of case to center of stub up area	19 (483)
Length of electrical wireway	26 1/2 (673)
(C) RH End of case to LH end of wireway	138 1/4 (3511)
Waste Outlets <i>(One each end)</i>	
(D) RH End of case to the center of LH waste outlet	132 3/8 (3363)
RH End of case to the center of RH waste outlet	12 1/8 (307)
Back O/S of case to center of waste outlets	26 3/4 (680)
Schedule 40 PVC drip pipe	1 1/4 (32)
Refrigeration Outlet	
Back of case to center of refrigeration outlet	21 1/4 (540)
RH end of case to center of refrigeration outlet	8 (203)


Multi-deck, 3 Display Levels, 48 In. Back, Narrow Footprint



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2012 energy efficiency standards.

Excel C2NX-E
Dairy/Delicatessen
Precut & Packaged Produce

Dimensions shown as inches and (mm).

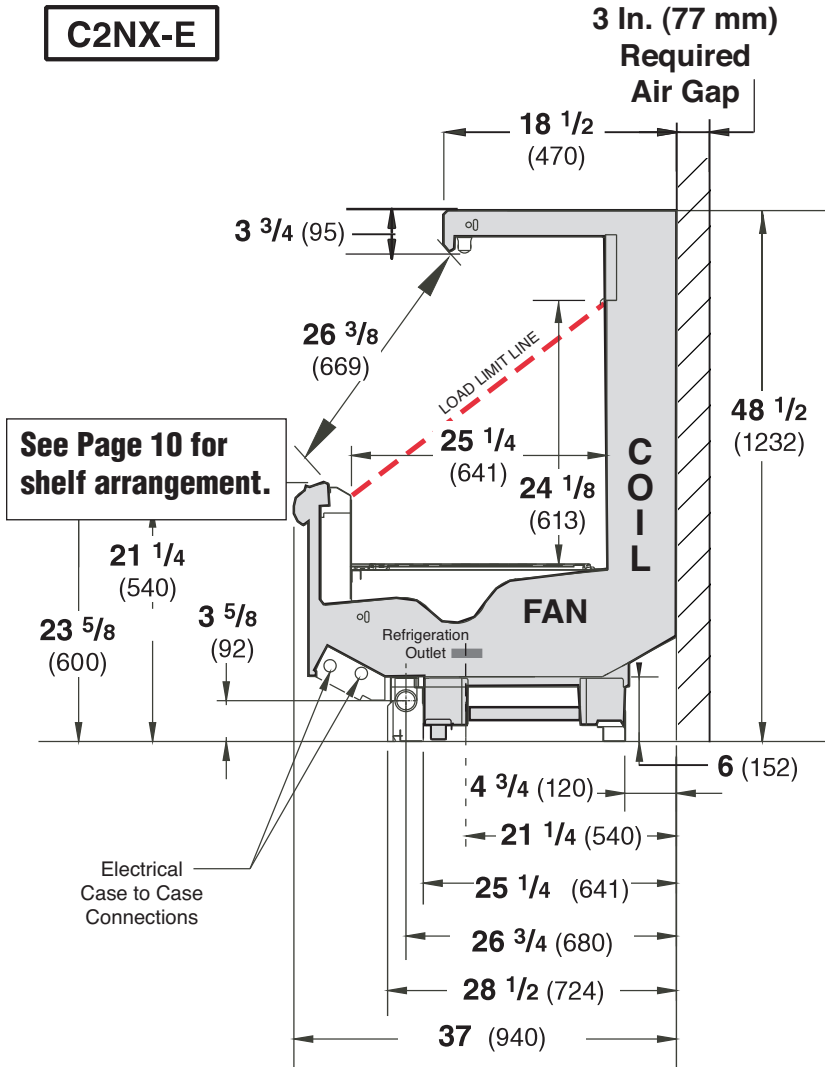

REFRIGERATION DATA

Note: This data is based on store temperature and humidity that does not exceed 75°F and 55% R.H.

	C2NX-E§
Discharge Air °F	27
Evaporator °F	21
Unit Sizing °F	19

§ Average evaporator temperature shown. Use dew point for high glide refrigerants for unit sizing. Care should be taken to use the dew point in PT tables for measuring and adjusting superheat. Adjust evaporator pressure as needed to maintain discharge air temperature shown.

Btu/hr/ft — Unlit Shelves ‡

	Parallel	Conventional
C2NX-E‡		
UNLIT		
12 ft	939	989

‡ Add 10 Btu/hr/ft per shelf row for LED fixtures.
 Add 20 Btu/hr/ft per shelf row for fluorescent lamps.

DEFROST DATA

	C2NX-E
Frequency (hr)	6
Defrost Water (lb/ft/day)	6
(±15% based on case configuration and product loading.)	
OFFTIME	C2NX-E
Temp Term °F	48°F
Failsafe Minutes	30

ELECTRIC OR GAS Not Recommended

Standard Defrost Thermostat

Close on rise: close 48°F – open 33°F

CONVENTIONAL CONTROLS

Low Pressure Backup Control

	C2NX-E
C/CO*	14°F / 4°F

Indoor Unit Only, Pressure Defrost

Termination*	48°F
--------------	------

*Use a Temperature Pressure Chart to determine PSIG conversions.

NSF Certification

This merchandiser model is manufactured to meet NSF/ANSI (National Sanitation Foundation) Standard #7 requirements for construction, materials & cleanability.

Estimated Charge **	C2NX-E
12 ft	3.3 lb 53 oz 1.5 kg

**This is an average for all refrigerant types. Actual refrigerant charge may vary by approximately half a pound (8 oz/0.2 kg).

Excel C2NX-E**Dairy/Delicatessen****Precut & Packaged Produce****Electrical Data**

	12 ft	
Number of Fans—7W	3	
	Amperes	Watts
	12 ft	12 ft
Evaporator Fan		
120V 50/60Hz Standard Energy Efficient	0.57	42
230V 50/60Hz Standard Energy Efficient	0.30	42
230V 60Hz Export	0.75	117
230V 50Hz Export	0.84	126
Minimum Circuit Ampacity †		
120V 50/60Hz Standard Energy Efficient	0.77	
230V 50/60Hz Standard Energy Efficient	0.50	
230V 60Hz Export	0.95	
230V 50Hz Export	1.04	
Maximum Over Current Protection 120V	20	
Maximum Over Current Protection 230V	15	
Anti-sweat Heaters		
120V 50/60Hz Standard	0.30	36
Standard Lighting (T-8 Fluorescent)		
1 Row Canopy	0.77	85
ONLY LIGHTING CONFIGURATIONS THAT ARE COMPLIANT WITH THE U.S. DEPT. OF ENERGY (DOE) 2012 REGULATION ARE AVAILABLE FOR SALE FOR USE IN THE U.S.A.		
Optional Lighting (T-8 Fluorescent)		
Additional 1 Row Canopy	0.77	85
1 Row Rail Light	0.77	85
2 Rows of Shelves	1.54	170
EcoShine II Canopy		
1 Row Canopy — EcoShine II	0.70	83.4
1 Row Canopy — EcoShine II HO	0.84	100.8
EcoShine II Rail Light —1 Row	0.26	30.7
EcoShine II Shelves		
1 Row of Shelves	0.26	30.7
2 Rows of Shelves	0.51	61.4

120V Fluorescent Lighting Circuit Total = Standard Lighting + Total Optional Lighting + Optional Shelf Lighting

120V LED Lighting Circuit Total = Canopy Lighting + Shelf Lighting+ Optional Rail Lighting

230V Lighting Circuit Total = Multiply 120V Lighting Circuit Total by 0.52

† MCA does not include Canopy A/S Heaters because heaters are wired separately from fans

Excel C2NX-E Dairy/Delicatessen Precut & Packaged Produce
--


Product Data

<i>Recommended Usable Cube</i> ¹ (Cu Ft/Ft)	2.56 ft ³ /ft (0.24 m ³ /m)
<i>AHRI Total Display Area</i> ² (Sq Ft/Ft)	2.24 ft ² /ft (0.68 m ² /m)
<i>Shelf Area</i> ³ (Sq Ft/Ft)	4.29 ft ² /ft (1.31 m ² /m)


- ¹ AHRI Refrigerated Volume less shelving and other unusable space: Refrigerated Volume/Unit of Length, ft³/ft [m³/m]
- ² Computed using AHRI 1200 standard methodology: Total Display Area, ft² [m²]/Unit of Length, ft [m]
- ³ Shelf surface area is composed of bottom deck plus standard shelf complement, as shown in the Hussmann *Product Reference Guide*. The standard shelf complement for this model is (1) row of 12-inch shelf and (1) row of 14-inch shelf.

ESTIMATED SHIPPING WEIGHT ⁴		
Case	12 ft	Solid End
lb (kg)	1200 (544)	(each) 75 (34)
⁴ Actual weights will vary according to optional kits included.		


Fan Wiring Offtime Defrost

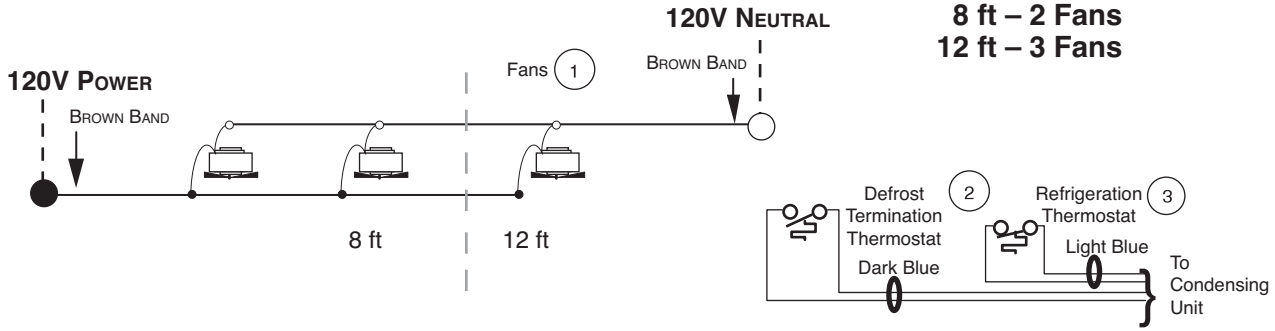

Canopy Light Circuits — Fluorescent Fixtures

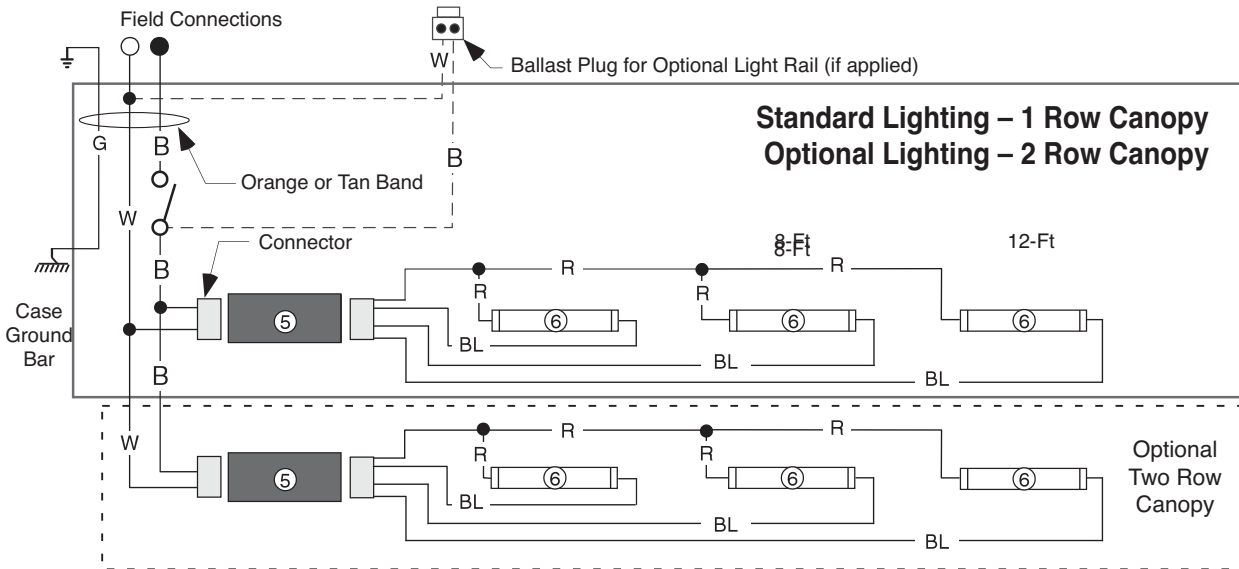

Optional Lighting – 1 Row Rail

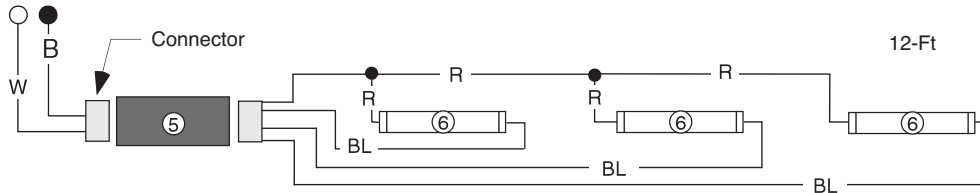


WARNING

All components must have mechanical ground, and the merchandiser must be grounded.

CIRCLED NUMBERS = PARTS LIST ITEM NUMBERS


R = Red Y = Yellow G = Green BL = Blue BK = Black W = White
 ● = 120V POWER ○ = 120V NEUTRAL ⊥ = FIELD GROUND ≡ = CASE GROUND

Canopy Anti-Sweat Heater

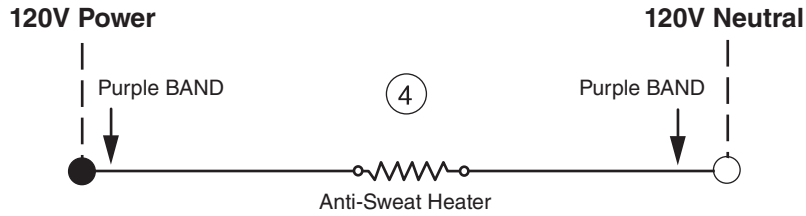

Optional Shelf Lighting Fluorescent Fixtures

Optional Shelf Harness and Fluorescent Light Circuits for Two Rows of Shelves

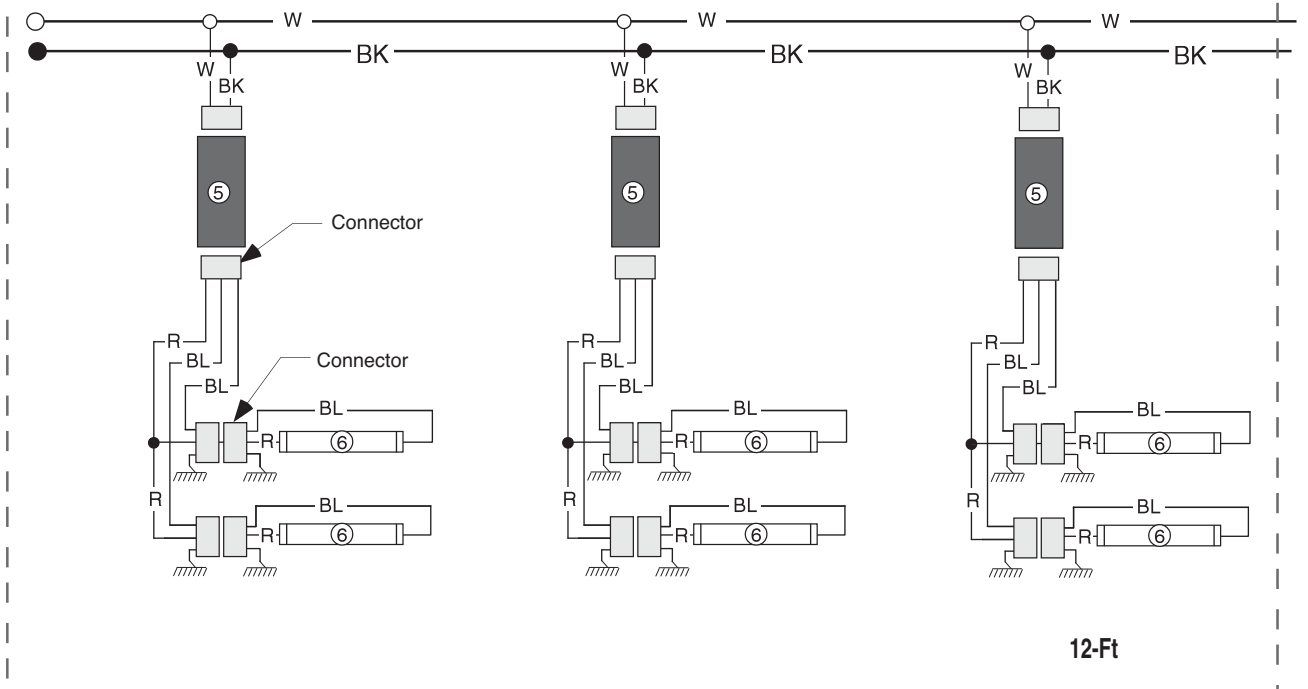

WARNING


All components must have mechanical ground, and the merchandiser must be grounded.

CIRCLED NUMBERS = PARTS LIST ITEM NUMBERS


R = Red Y = Yellow G = Green BL = Blue BK = Black W = White
 ● = 120V POWER ○ = 120V NEUTRAL ⊥ = FIELD GROUND ≡ = CASE GROUND

Optional Canopy and Rail Light Circuits — LED Fixtures

EcoShine II LED Canopy Lighting – 1 Row

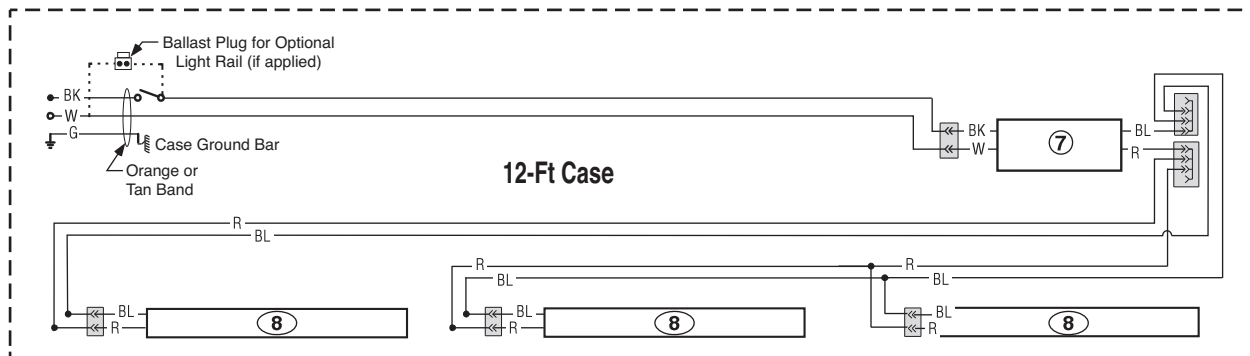

EcoShine II LED Rail Lighting – 1 Row

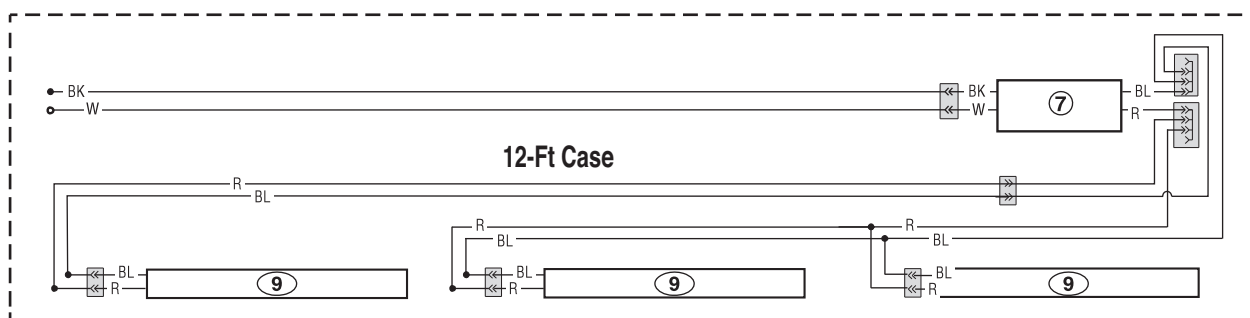

WARNING

All components must have mechanical ground, and the merchandiser must be grounded.


CIRCLED NUMBERS = PARTS LIST ITEM NUMBERS

R = Red Y = Yellow G = Green BL = Blue BK = Black W = White

● = 120V POWER ○ = 120V NEUTRAL ⊥ = FIELD GROUND ≡ = CASE GROUND

Optional Shelf Lighting LED Fixtures

Optional Shelf Harness and LED Light Circuits for 2 or 3 Rows of Shelves

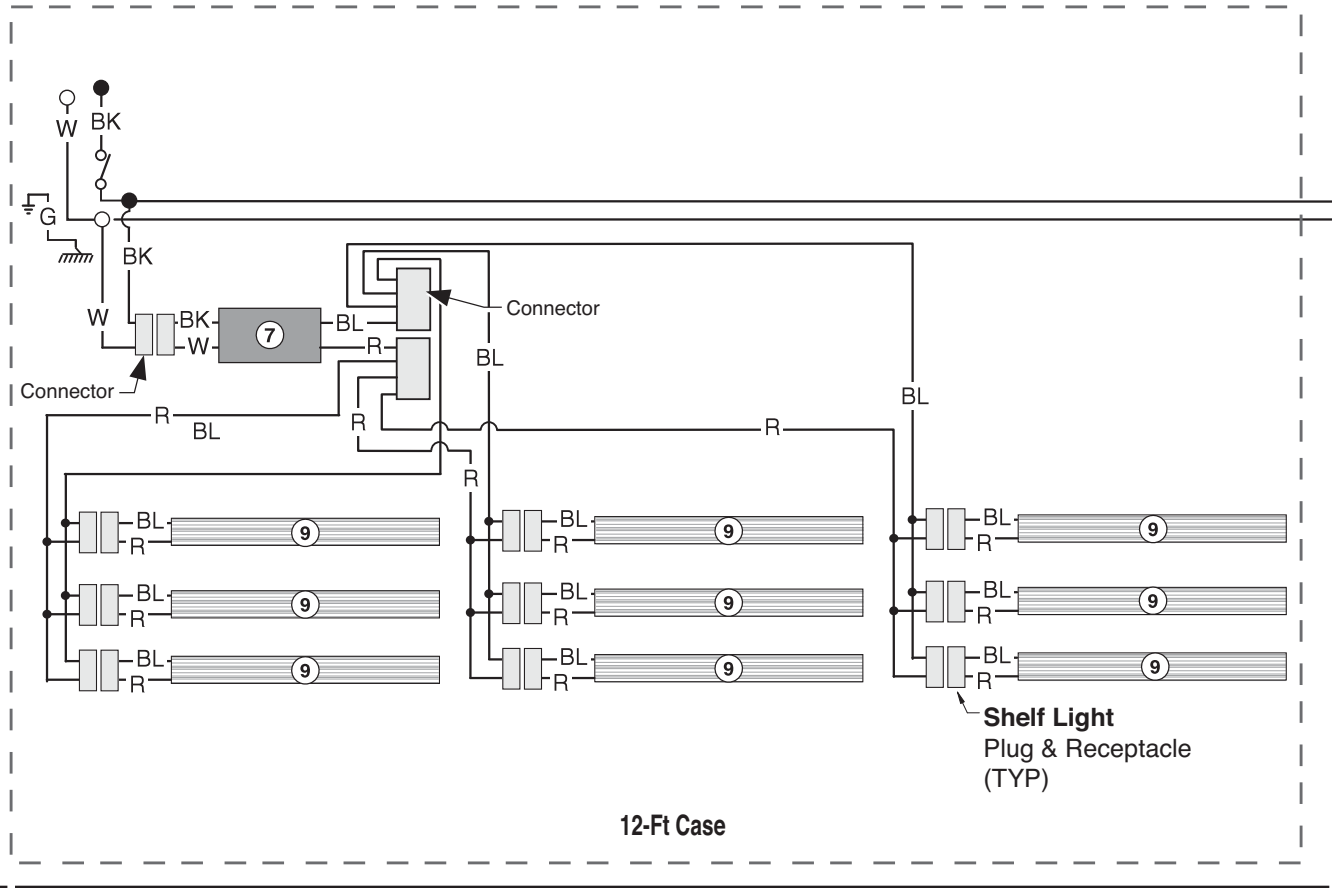

WARNING

All components must have mechanical ground, and the merchandiser must be grounded.

CIRCLED NUMBERS = PARTS LIST ITEM NUMBERS

R = Red G = Green BL = Blue BK = Black W = White

● = 80V POWER ○ = 80V NEUTRAL ⚡ = FIELD GROUND ⏏ = CASE GROUND

Impact Excel C2NX-E
Dairy/Delicatessen
Precut & Packaged Produce

SHELF CONFIGURATION


This merchandiser is designed for one or two shelves.

The depth of the shelf used in the top eight (8) shelf hole locations is critical to case performance.

If a shelf is placed in one of the top eight (8) locations it must comply with the angle/depth requirements listed below.

Shelf Angle	Maximum Shelf Depth
0°	12 in.
15°	14 in. or less
30°	18 in. or less
45°	18 in. or less

NOTE: Shelves placed in the lower positions may be up to 18 in. deep when positioned at a 0° angle.

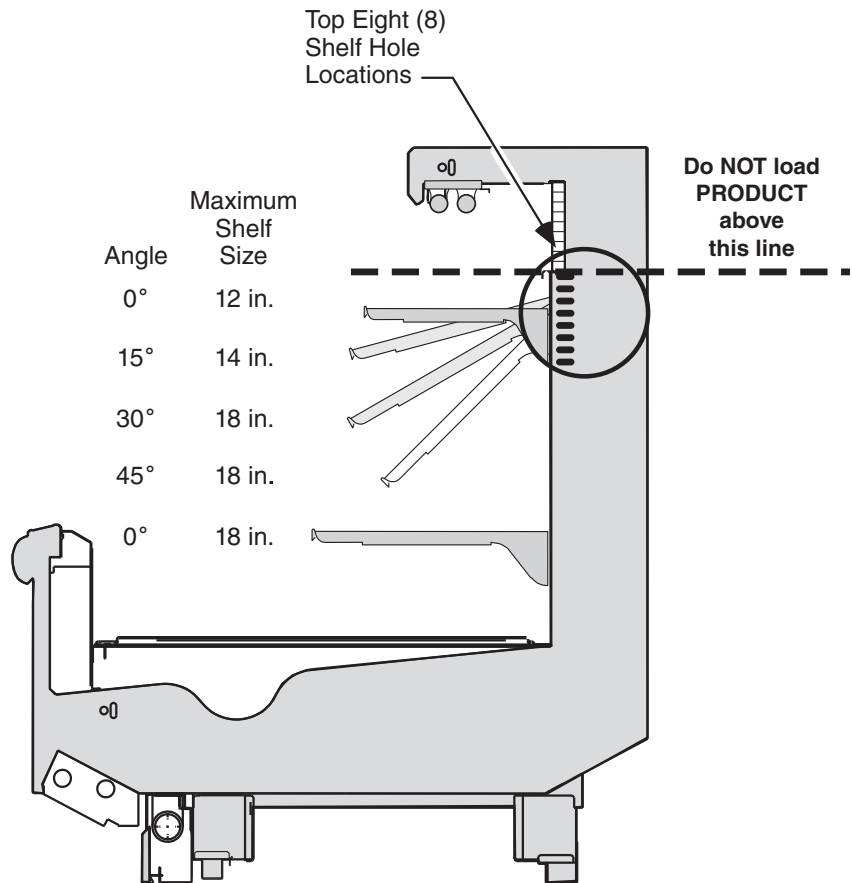



Impact Excel C2NX-E
Dairy/Delicatessen
Precut & Packaged Produce

The ballast for the canopy and shelf lamps is located behind the canopy on the left-hand end (when facing case) of the merchandiser.

To access the ballast:

1. Remove screws at bottom edge of canopy and rear of light channel.
2. Lower light channel which will pivot on hinge.
3. Service or replace ballasts as required.
4. Reassemble items as they were originally installed.

NOTE: Rail lamp ballast is located in the electrical raceway.

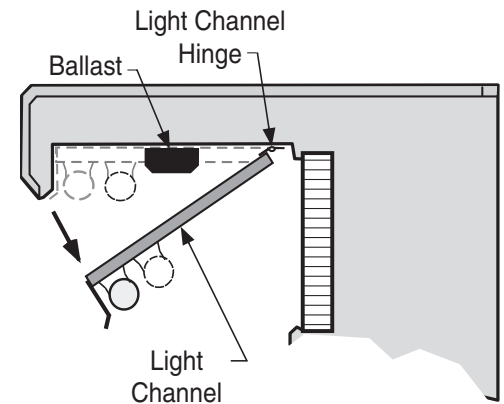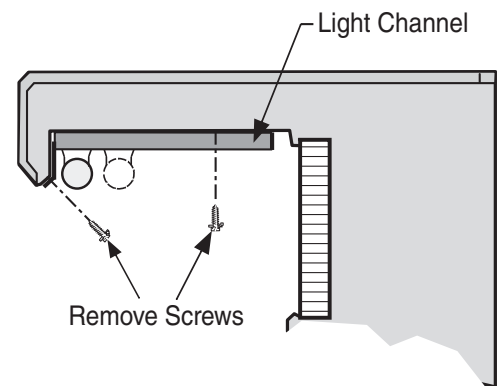

CANOPY ANTI-SWEAT HEATER

The canopy anti-sweat heater location is shown below. Connections are in the electrical wireway.

