


DOE 2017
Energy Efficiency
Compliant

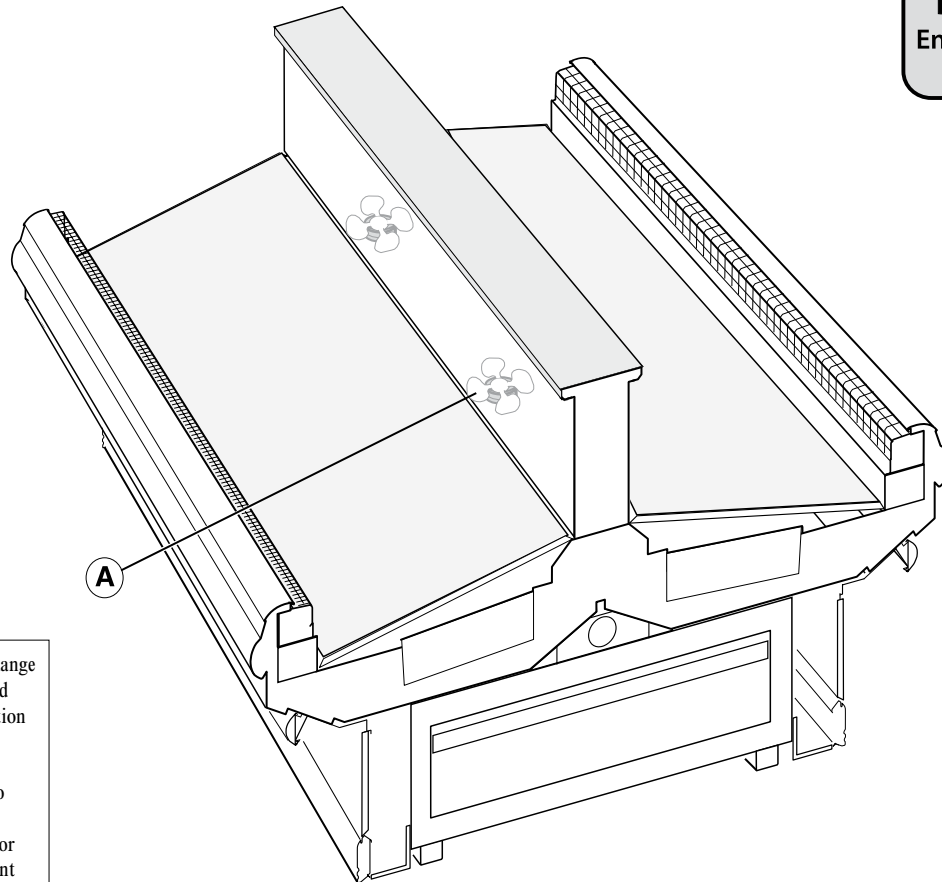

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

Item	Part #	Description	Wiring Item #
FAN ASSEMBLIES, AND THERMOSTATS			
(A)	0477656	Standard Energy Efficient Fan Motor, Evaporator (MO.4410547)	(1)
	0142780	Fan Blade Embossing toward motor (FB.0142780)	

Data sheet-Excel-PWW-E

Note: Revision C: Added high glide refrigerant note. Other changes marked by bar, underline or circle.


Engineering Plan Views

Dimensions are shown as inches & (mm).

PHYSICAL DATA	
Merchandiser Drip Pipe (in.)	1 1/2
Merchandiser Liquid Line (in.)	3/8
Merchandiser Suction Line (in.)	7/8



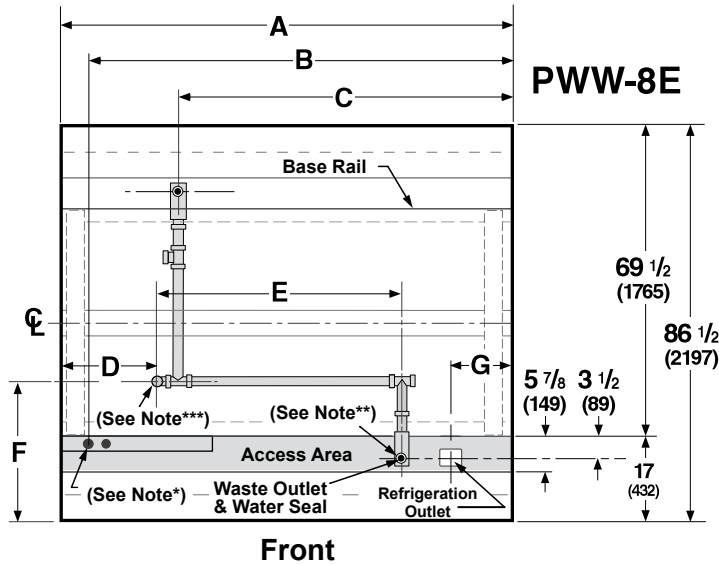


86 Inch Wide Island Bulk Produce

11-2010



PWW-8E

Front

General	4 Ft	6 Ft	8 Ft	12 Ft
(A) Case length <i>Each End and Partition adds 1 1/2 in. (38 mm) to the length of the lineup.</i> Maximum outside dimension of case back to front <i>(includes bumper)</i>	48 1/4 (1226)	72 1/4 (1835)	96 3/8 (2448)	144 1/2 (3670)
Front of splashguard to outside edge of base rail	5 7/8 (149)	5 7/8 (149)	5 7/8 (149)	5 7/8 (149)
Back of case to outside edge of front base rail	69 1/2 (1765)	69 1/2 (1765)	69 1/2 (1765)	69 1/2 (1765)
Front of case to outside edge of front base rail	17 (432)	17 (432)	17 (432)	17 (432)
Width of base rail	2 1/8 (54)	2 1/8 (54)	2 1/8 (54)	2 1/8 (54)
Stub up area between front base rail and splashguard	4 7/8 (124)	4 7/8 (124)	4 7/8 (124)	4 7/8 (124)
Electrical Service 				
(B) Righthand end of case to center of farthest knockout Length of electrical raceway <i>*Note: Electrical field wiring connection point.</i>	47 1/4 (1202)	71 1/4 (1810)	95 3/8 (2423)	143 5/8 (3650)
Waste Outlet 				
(C) Right end of case to center of waste outlet	24 1/8 (613)	46 5/8 (1184)	72 1/4 (1835)	72 1/4 (1835)
Water Seal 				
Edge of water seal to center of waste outlet	4 (102)	4 (102)	4 (102)	4 (102)
Center of waste outlet to outside edge of front base rail	3 1/2 (89)	3 1/2 (89)	3 1/2 (89)	3 1/2 (89)
** Note: Field installed water seal outlets, tees, and connectors are shipped with case				
Drip Pipe Outlet 				
(D) Left end of case to center of drip pipe outlet	20 3/8 (517)	19 1/2 (495)	19 1/2 (495)	68 1/2 (1740)
(E) Center of waste outlet to center of drip pipe outlet	3 3/4 (95)	24 3/4 (629)	51 7/8 (1318)	3 3/4 (95)
(F) Front of case to center of drip pipe outlet Outside diameter of drip pipe lines	24 7/8 (632)	25 7/8 (657)	25 7/8 (657)	24 7/8 (632)
***Note: Field drip pipe connection point.	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)	1 1/2 (38)
Refrigeration Outlet 				
(D) Right end of case to center of refrigeration outlet Center of refrigeration outlet to outside edge of front base rail	9 (230)	9 (230)	9 (230)	9 (230)
	3 1/2 (89)	3 1/2 (89)	3 1/2 (89)	3 1/2 (89)



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.



REFRIGERATION DATA

Note: This data is based on store temperature and humidity that does not exceed 75°F and 55% R.H.

PWW-4, 6, 8, 12E§

Discharge Air (°F) 34

Evaporator(°F) 24

Unit Sizing (°F) 22

§ Average evaporator temperature shown. Use dew point for high glide refrigerants for unit sizing. Care should be taken to use the dew point in PT tables for measuring and adjusting superheat. Adjust evaporator pressure as needed to maintain discharge air temperature shown.

Btu/hr/ft **PWW-4, 6, 8, 12E**

Parallel 1200

Conventional 1325

DEFROST DATA

PWW-4, 6, 8, 12E

Frequency (hr) 6

Defrost Water (lb/ft/day) 8

(± 15% based on case configuration and product loading).

OFFTIME **PWW-4, 6, 8, 12E**

Temp Term (°F) N/A

Failsafe (minutes) 45

Standard Defrost Thermostat N/A

CONVENTIONAL CONTROLS

Low Pressure Backup Control

PWW-4, 6, 8, 12E


CI/CO** 17°/ 7° F

Indoor Unit Only, Pressure Defrost

Termination* 48° F

*Use a Temperature Pressure Chart to determine PSIG conversions.

Dimensions are shown as inches & (mm).

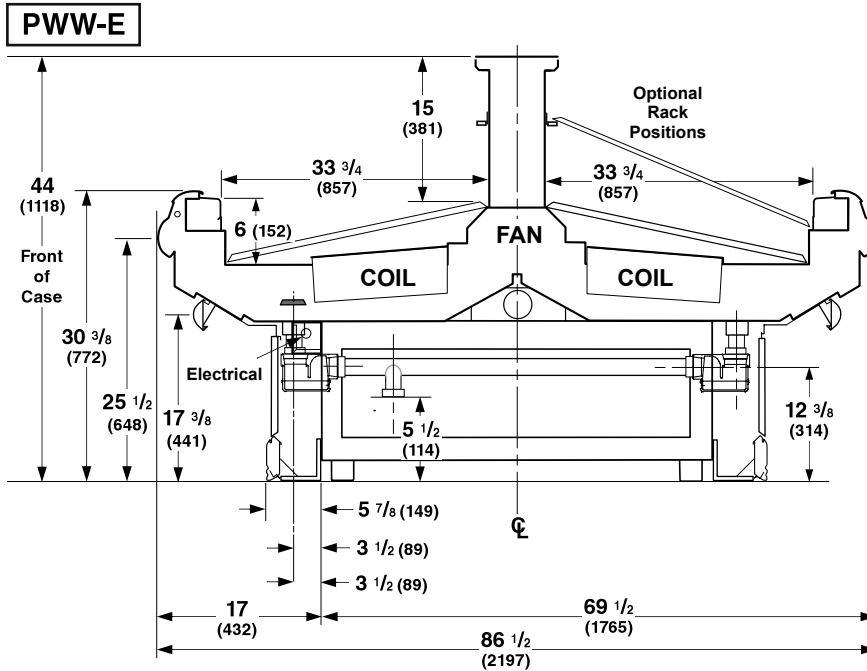

PHYSICAL DATA

Estimated Charge **	PWW-4, 6, 8, 12E			
4 ft	1.4 lb	22oz	0.6 kg	
6 ft	2.3 lb	37 oz	1.0 kg	
8 ft	2.8 lb	45 oz	1.3 kg	
12 ft	4.3 lb	69 oz	2.0 kg	

**This is an average for all refrigerant types. Actual refrigerant charge may vary by approximately 0.5 lb (8 oz / 0.2 kg).

NSF Certification

This merchandiser model is manufactured to meet NSF/ANSI (National Sanitation Foundation) Standard #7 requirements for construction, materials & cleanability.

Electrical Data

Number of Fans	4 ft	6 ft	8 ft	12 ft
Refrigeration — <u>13W</u>	1	1	2	3
Refrigeration — <u>13W</u> (Export)	1	1	2	3

Merchandiser	Amperes				Watts			
	4 ft	6 ft	8 ft	12 ft	4 ft	6 ft	8 ft	12 ft
Fans (Refrigeration)								
Energy Efficient (120V 60Hz)	0.33	0.33	0.66	0.99	20	20	40	60
Export (230V 50 Hz)	0.47	0.47	0.94	1.41	70	70	140	210

Minimum Circuit Ampacity

With Energy Efficient Fans (120V 60Hz)	0.53	0.53	0.86	1.19
With Export Fans (230V 50 Hz)	0.67	0.67	1.14	1.61

Maximum Over Current Protection 120V	20	20	20	20
Maximum Over Current Protection 230V	15	15	15	15

Standard Lighting

None

Optional Lighting

None

Optional Shelf Lighting

None

Product Data

<i>Recommended Usable Cube</i> ¹ (Cu Ft/Ft)	7.08 ft ³ /ft (0.66 m ³ /m)
<i>AHRI Total Display Area</i> ² (Sq Ft/Ft)	6.16 ft ² /ft (1.88 m ² /m)
<i>Shelf Area</i> ³ (Sq Ft/Ft)	6.17 ft ² /ft (1.88 m ² /m)

- ¹ AHRI Refrigerated Volume less shelving and other unusable space: Refrigerated Volume/Unit of Length, ft³/ft [m³/m]
- ² Computed using AHRI 1200 standard methodology: Total Display Area, ft² [m²]/Unit of Length, ft [m]
- ³ Shelf surface area is composed of bottom deck plus standard shelf complement, as shown in the Hussmann *Product Reference Guide*. The standard shelf complement for this model is NONE.


ESTIMATED SHIPPING WEIGHT ⁴

Case	4 ft	6 ft	8 ft	12 ft	Flat End (each)
lb (kg)	600 (272)	800 (363)	1000 (454)	1200 (544)	70 (32)

⁴ Actual weights will vary according to optional kits included.

**Fan Wiring
Offtime Defrost**

1, 2 & 3 Fans

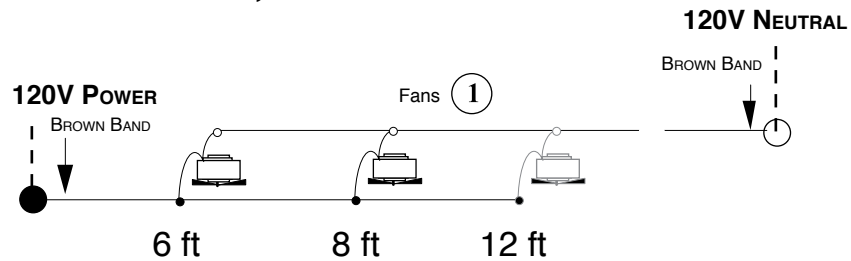

WARNING

All components must have mechanical ground, and the merchandiser must be grounded.

CIRCLED NUMBERS = PARTS LIST ITEM NUMBERS

● = 120V POWER ○ = 120V NEUTRAL