

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

Warning:
Terminal block NOT for
case-to-case
wire connection!

Item	Part #	Description	Wiring Item #	Item	Part # (Qty.)	Description	Wiring Item #
FAN ASSEMBLIES, AND THERMOSTATS				HEATERS			
A.	12W Standard Energy Efficient Fan Assembly	(1)	H.	Electric Defrost Heaters – Front (208V)	(8)		
	0477655 Fan Motor, Evaporator (MO.4410546)			3015372 (1) 2 Door Models (HE.4850346)			
	0461805 Fan Blade (FB.4780446)			3015373 (1) 3 Door Models (HE.4850337)			
B.	0474033 Standard Non-adjustable Defrost Thermostat (CT.4440726)	(2)		3015374 (1) 4 Door Models (HE.4850347)			
C.	Optional Adjustable Refrigeration Thermostat	(3)		3015375 (1) 5 Door Models (HE.4850323)			
D.	0344662 Defrost Limit Thermostat (CT.4440261)	(4)		Electric Defrost Heaters — Rear (208V)	(8)		
E.	0461814 Relay Control Thermostat or Fan and Anti-sweat Heater Thermostat (CT.4481296) (KG Only)	(5)		3015376 (1) 2 Door Models (HE.4850358)			
RELAYS							
F.	0342598 Anti-Sweat Control Relay (120V) (120V KoolGas) (RL.4480238)	(6)	I.	Drain Pan Heater (Electric & KoolGas) (120V)	(9)		
G.	0342599 Fan Control Relay (208V) (RL.4480237)	(7)		0387036 (1) 2 Door Models (HE.4850239)			
LED FIXTURES AND POWER SUPPLY							
	J.	0499399 LED Power Supply (EP.4481668)					
	K.	LED Fixture					
		Replace with like fixtures					

Refer to INNOVATOR REACH-IN GLASS DOOR INSTALLATION AND SERVICE manual, PIN 0425683, for Innovator, Innovator II, and Innovator III door and frame replacement parts.

Data sheet-Reach-in RLNI

Note: Revision J: Updated wiring diagrams on page 6 and 7.


Engineering Plan Views

RLNI Plan View 2, 3, 4, & 5 Door

Dimensions shown as in. & (mm).

PHYSICAL DATA

Merchandiser Drip Pipe (in.)	1 1/4
Merchandiser Liquid Line (in.)	3/8
Merchandiser Suction Line (in.)	5/8

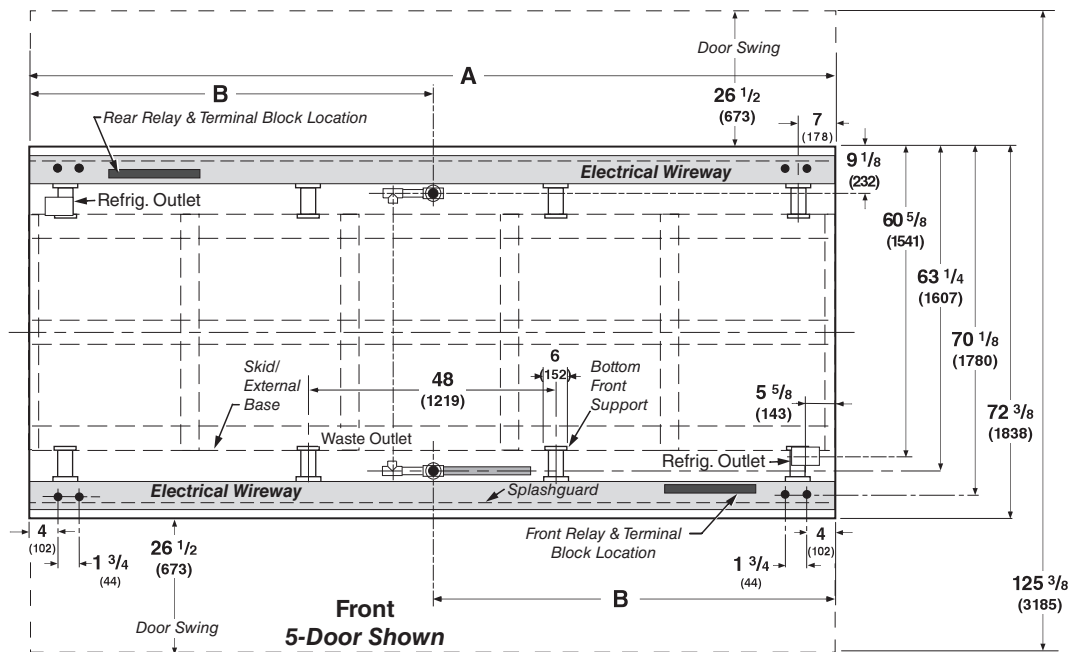

Serial Plate attached to top left front of each case.	2 Dr	3 Dr	4 Dr	5 Dr
General				
(A) Case Length (without ends or partitions)	62 (1575)	92 1/2 (2350)	122 7/8 (3121)	153 3/8 (3896)
**NOTE: Each solid end adds approximately 2 3/8 in (60 mm) to length of line up; each partition add approximately 2 3/4 in (70 mm); case to case joints can add approximately 1/8 in (3 mm) for gasket material.				
Maximum O/S dimension of case back to front (Includes bumper)	72 3/8 (1837)	72 3/8 (1837)	72 3/8 (1837)	72 3/8 (1837)
Back of case to rear of splashguard	68 1/2 (1740)	68 1/2 (1740)	68 1/2 (1740)	68 1/2 (1740)
Width of Skidrail	3 3/4 (95)	3 3/4 (95)	3 3/4 (95)	3 3/4 (95)
Width of Bottom Front Support	6 (152)	6 (152)	6 (152)	6 (152)
Stub-up area between front skidrail and splashguard	9 (229)	9 (229)	9 (229)	9 (229)
Electrical Service				
RH end of case to the center of nearest knockout	4 (102)	4 (102)	4 (102)	4 (102)
RH end of case to the center of LH knockout	58 (1473)	88 1/2 (2248)	118 7/8 (3019)	149 3/8 (3794)
Back O/S of case to center of knockout	70 1/8 (1781)	70 1/8 (1781)	70 1/8 (1781)	70 1/8 (1781)
* NOTE: Electrical Field Wiring Connection Point is at terminal.				
Waste Outlet				
(B) Right end of case to center of waste outlet	23 7/8 (606)	54 1/4 (1378)	46 1/4 (1175)	76 5/8 (1946)
Back O/S of case to center of waste outlet	63 1/4 (1607)	63 1/4 (1607)	63 1/4 (1607)	63 1/4 (1607)
Water Seal				
Edge of water seal to center of waste outlet	13 (330)	13 (330)	13 (330)	13 (330)
Schedule 40 drip piping	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)
** NOTE: Field installed water seal outlets, tees, and connectors are shipped with case				
Refrigeration Outlet				
RH end of case to center of RH refrigeration outlet	5 5/8 (143)	5 5/8 (143)	5 5/8 (143)	5 5/8 (143)
Back O/S of case to center of refrigeration outlet	60 5/8 (1541)	60 5/8 (1541)	60 5/8 (1541)	60 5/8 (1541)
Outside bottom front supports from end of case	7 (178)	7 (178)	7 (178)	7 (178)
Center bottom front support from Centerline	24 (610)	24 (610)	24 (610)	24 (610)
Distance between Center and Outside supports will vary				

Reach-in Narrow Island 2, 3, 4 and 5 Door Models
 INNOVATOR Doors Standard




Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

Standard Reach-in configuration consists of Innovator I doors, energy efficient fan motors, and EcoShine II LED vertical lighting.

Dimensions shown as in. & (mm).

RLNI, RLNIE

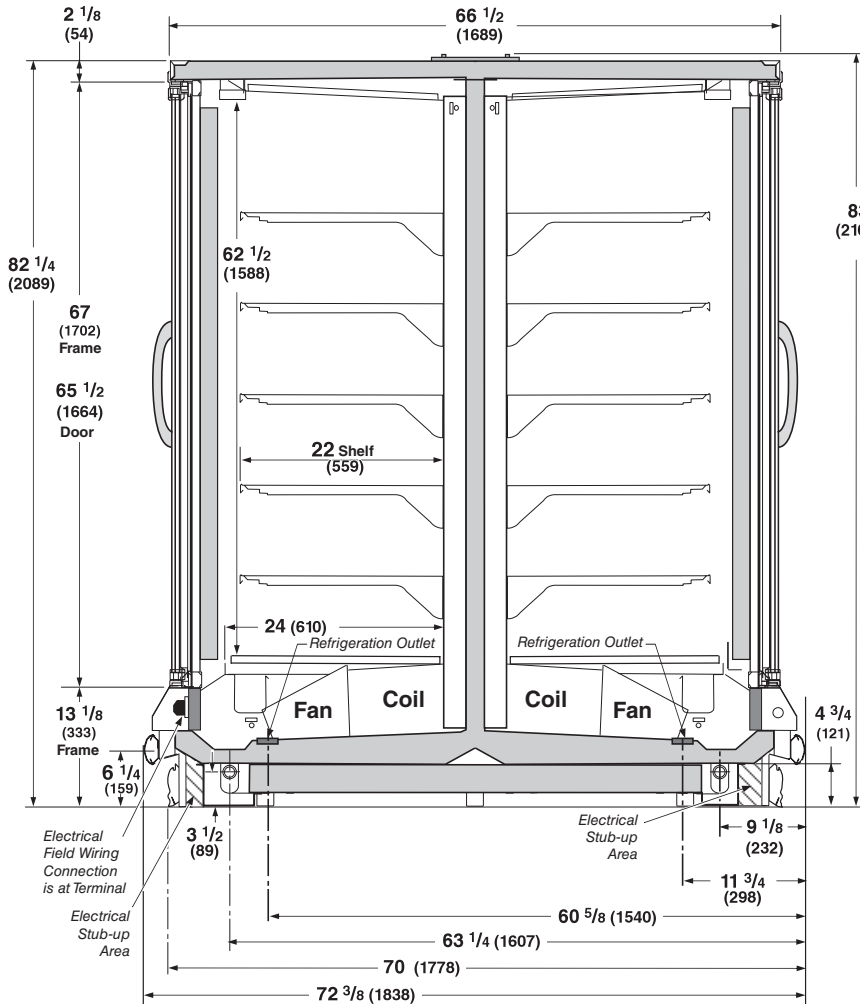

Estimated Charge Per Side***

2Dr	1.8 lb	29 oz	0.8 kg
3Dr	2.7 lb	43 oz	1.2 kg
4Dr	3.6 lb	58 oz	1.6 kg
5Dr	4.6 lb	74 oz	2.1 kg

***This is an average for all refrigerant types. Actual refrigerant charge may vary by approximately half a pound (8 oz/0.2 kg).

NSF Certification

This merchandiser model is manufactured to meet NSF/ANSI (National Sanitation Foundation) Standard #7 requirements for construction, materials & cleanability.

RLNI

With Innovator Doors or Innovator III Doors
 Low Temperature

Refrigeration data is PER SIDE.

REFRIGERATION DATA§

Note: This data is based on store temperature and humidity that does not exceed 75°F and 55% R.H.

	FF	IC	AHRI Rating*
Discharge Air (°F)	-5	-12	-2
Evaporator (°F)	-11	-19	-7
Unit Sizing (°F)	-14	-22	-10

*With A/S controller.

Btu/hr/door/side

	FF	IC	AHRI Rating*
INNOVATOR I			
Parallel	865	970	840
Conventional	880	990	855
INNOVATOR III			
Parallel	815	940	
Conventional	830	960	

§ Average evaporator temperature shown. Use dew point for high glide refrigerants for unit sizing. Care should be taken to use the dew point in PT tables for measuring and adjusting superheat. Adjust evaporator pressure as needed to maintain discharge air temperature shown.

DEFROST DATA

	FF	IC
Frequency (hr)	24	24
Defrost Water (lb/Dr/side/day)	1.2	1.2
(± 15% based on case configuration and product loading.)		
ELECTRIC		
Temp Term (°F)	48°	48°
Failsafe (minutes)	45	45
GAS		
Duration (minutes)	20	20
OFFTIME	Not Recommended	

CONVENTIONAL CONTROLS

Low Pressure Backup Control

	FF	IC
CI/CO (Temp °F)*	-18°/-34°	-26°/-45°
Indoor Unit Only, Pressure Defrost Termination (Temp °F)**		

Not Recommended

**Use a Temperature Pressure Chart to determine PSIG conversions.

RLNI

With Innovator Doors or Innovator III Doors
Low Temperature

Hussmann recommends against frame heater cycling with *Innovator* doors or *Innovator III* doors to prevent door seals from freezing to the frames and tearing.

ELECTRICAL DATA IS PER SIDE — TWO CIRCUITS REQUIRED PER CASE.

Electrical Data

	2Dr	3Dr	4Dr	5Dr				
Number of Fans—12W	2	3	4	5				
	Amperes				Watts			
Merchandiser	2Dr	3Dr	4Dr	5Dr	2Dr	3Dr	4Dr	5Dr
Energy Efficient Evaporator Fan								
120V 50/60Hz	0.60	0.90	1.20	1.50	36	54	72	90
240V 50/60Hz Export Innovator	0.30	0.45	0.60	0.75	36	54	72	90
Door Anti-sweat Heaters (on fan circuit)								
120V 50/60Hz Innovator*	1.5	2.3	3.0	3.8	182	273	364	455
120V 50/60Hz Innovator III	0.9	1.3	1.7	2.2	104	156	208	260
240V 50/60Hz Export Innovator	0.8	1.2	1.5	1.9	183	275	367	459
220V 50/60Hz Export Innovator III	NA	NA	NA	NA	NA	NA	NA	NA
* Maximum door watts without anti-sweat cycling controls shown.								
Frame Anti-sweat Heaters (on fan circuit)								
120V 50/60Hz	0.78	1.18	1.57	1.97	94	141	188	236
240V 50/60Hz Export	0.45	0.67	0.89	1.12	107	161	215	269
Minimum Fan Circuit Ampacity								
120V 50/60Hz Innovator	3.1	4.9	6.8	8.6				
120V 50/60Hz Innovator III	2.5	3.9	5.5	7.0				
240V 50/60Hz Export Innovator	1.8	2.9	4.0	4.9				
240V 50/60Hz Export Innovator III	1.0	1.6	2.3	2.8				
Maximum Over Current Protection 120V	20	20	20	20				
Maximum Over Current Protection 240V	15	15	15	15				
Defrost								
Drain Heaters (120V)	0.63	1.25	2.00	2.57	75	150	240	300
(Export: 220V 50 Hz)	0.34	0.76	1.22	1.53	84	168	269	336
(Export: 240V 50 Hz)	0.41	0.83	1.33	1.67	100	200	320	400
208V 1Ø Electric Defrost	6.72	10.08	13.46	16.82	1400	2100	2800	3500
(Export: 220V 50 Hz)	7.11	10.66	14.24	17.79	1564	2345	3133	3914
(Export: 240V 50 Hz)	7.76	11.65	15.53	19.42	1864	2796	3728	4660
Standard Vertical LED Lighting	2Dr	3Dr	4Dr	5Dr	2Dr	3Dr	4Dr	5Dr
Hussmann EcoShine II™ (120V)	0.36	0.54	0.72	0.90	38	57	76	95
Hussmann EcoShine II™ (220V Export)	0.20	0.29	0.39	0.49	38	57	76	95
Optional Vertical LED Lighting								
GE Illumination (120V)	0.30	0.45	0.60	0.75	36	54	72	90
GE Illumination (220V Export)	0.16	0.25	0.33	0.41	36	54	72	90

Anti-sweat controls are standard for all low temperature Reach-in cases with Innovator I doors.

Product data is PER SIDE.

Product Data

<i>Recommended Usable Cube</i> ¹ (Cu Ft/Dr)	22.80 ft ³ /Dr (0.65 m ³ /Dr)
<i>AHRI Total Display Area</i> ² (Sq Ft/Dr)	13.04 ft ² /Dr (1.21 m ² /Dr)
<i>Shelf Area</i> ³ (Sq Ft/Dr)	28.50 ft ² /Dr (2.65 m ² /Dr)

¹ AHRI Refrigerated Volume less shelving and other unusable space: Refrigerated Volume/Unit of Length, ft³/ft [m³/m]
² Computed using AHRI 1200 standard methodology: Total Display Area, ft² [m²]/Unit of Length, ft [m]
³ Shelf surface area is composed of bottom deck plus standard shelf complement, as shown in the Hussmann *Product Reference Guide*. The standard shelf complement for this model is (5) rows of 22-inch shelves.


ESTIMATED SHIPPING WEIGHT ⁴					
Case	2 Dr	3 Dr	4 Dr	5 Dr	Solid End
					(each)
lb (kg)	1144 (520)	2230 (1014)	2974 (1352)	3718 (1690)	110 (50)

⁴ Actual weights will vary according to optional kits included.

Fan and Heater Circuits - Electric Defrost (standard)

Low Temperature

CIRCLED NUMBERS = PARTS LIST ITEM NUMBERS
 R = Red P = Purple 2P = Purple (2 Bands) DB = Dark Blue BK = Black
 LB = Light Blue BR = Brown Y = Yellow OR = Orange W = White
THESE ARE MARKER COLORS (WIRE MAY VARY.)

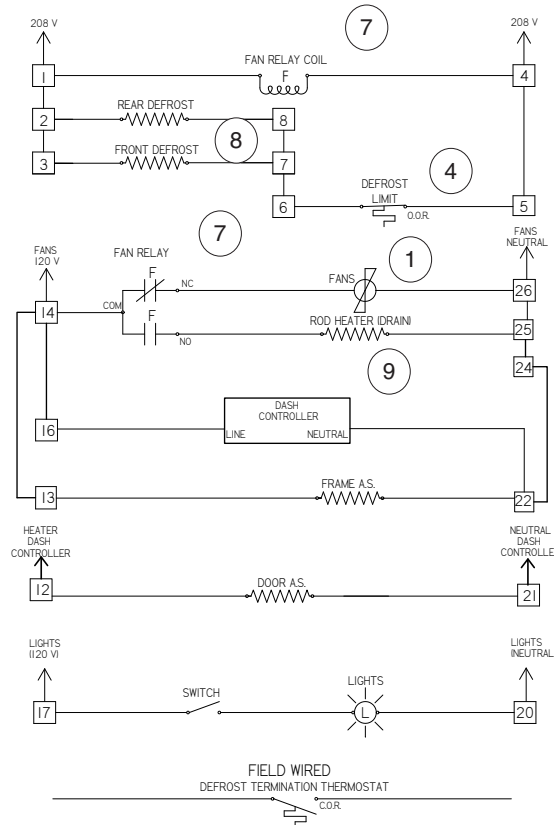


CAUTION: When multiplexing merchandisers equipped with defrost heaters, if branch circuit overcurrent protection is larger than the individual merchandiser's defrost circuit load, then additional supplemental overcurrent protection may be required per NEC Articles 210 and 240.

Refer to *Innovator Reach-In Glass Door, Installation and Service manual*, P/N 0425683, for *Innovator* door and frame replacement parts.

3024448_C

THE HEAVY LINES DRAWN INSIDE THE TERMINAL BLOCKS REPRESENT PERMANENT INTERNAL JUMPERS.

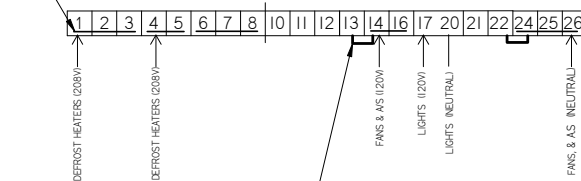


THE HEAVY LINES DRAWN OUTSIDE THE TERMINAL BLOCKS REPRESENT REMOVABLE EXTERNAL JUMPERS.

Electric Defrost Sequence - Low Temperature

1. Power from the defrost contactor energizes Defrost Heaters and 208V Evaporator Fan Relay Coil (7). Relay Contacts open the fan circuit and energizes the Drain Pan Heater.
2. If the Defrost Heater raises internal air temperature above 90°F, the Defrost Limit Thermostat (4) will open.
3. When Defrost Termination Thermostat ends defrost period, the defrost contactor opens the Defrost Heater and Evaporator Fan Relay Coil Circuits. The Drain Pan Heater goes off and fans are on.
4. Standard low temperature Reach In cases with Innovator I doors are shipped with the DASH controller for door anti-sweat heater control installed. Do not connect the DASH controller input to a centralized anti-sweat system. It must be connected to a continuous 120V circuit for proper operation.
5. If the case is connected to a centralized anti-sweat controller that meets DOE compliance requirements, the DASH controller is not installed on the case. Feed the 120V controller output into terminal #12.
6. Options may be installed that have additional or replacement wiring diagrams.
7. Reach In cases with Innovator III doors do not have the DASH controller.

Fan and Heater Circuits - Gas Defrost (optional) Low Temperature

CIRCLED NUMBERS = PARTS LIST ITEM NUMBERS
 R = Red P = Purple 2P = Purple (2 Bands) DB = Dark Blue BK = Black
 LB = Light Blue BR = Brown Y = Yellow OR = Orange W = White
THESE ARE MARKER COLORS (WIRE MAY VARY.)

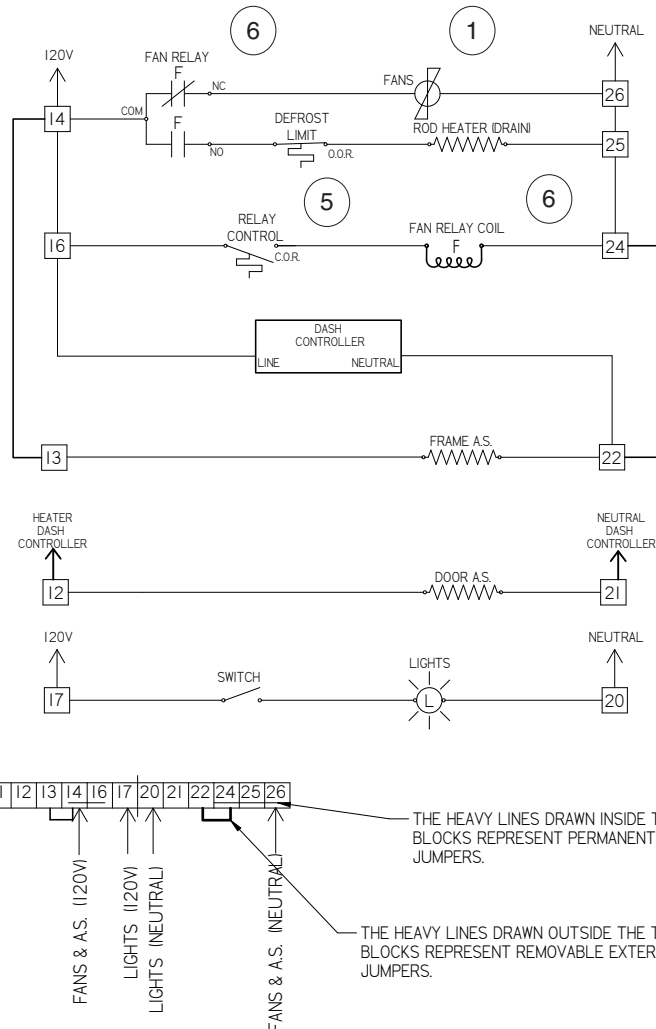

3024767_C

Gas Defrost Sequence - Low Temperature

1. Defrost vapor enters evaporator causing a rise in temperature. At about 35°F the Control Relay Thermostat (5) closes the Fan Relay Coil (7) and Control Relay Coil (6) circuit. The Coil opens the Fan, Door Heater, and Frame Heater circuits, while energizing the Drain Pan Heater (9).
2. If the Drain Pan Heater (9) raises internal air temperature above 90°F, the Heater Limit Thermostat (4) will open.
3. When the defrost timer ends a defrost period, the evaporator temperature will start to fall. At about 20°F, the Control Relay Thermostat will open, de-energizing the Control Relay Coil and Fan Relay Coil (7). Control and Fan Relay's will open the Drain Pan Heater circuits, and will close the Fan, Door Heater, and Frame Heater circuits.
4. Standard low temperature Reach In cases with Innovator I doors are shipped with the DASH controller for door anti-sweat heater control installed. Do not connect the DASH controller input to a centralized anti-sweat system. It must be connected to a continuous 120V circuit for proper operation.
5. If the case is connected to a centralized anti-sweat controller that meets DOE compliance requirements, the DASH controller is not installed on the case. Feed the 120V controller output into terminal #12.
6. Options may be installed that have additional or replacement wiring diagrams.
7. Reach In cases with Innovator III doors do not have the DASH controller.