

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

Item	Part #	Description	Wiring Item #	Item	Part #	Description	Wiring Item #
<b>FAN ASSEMBLIES, AND THERMOSTATS</b>				<b>HEATERS (CONTINUED)</b>			
A.	4W Standard Energy Efficient Fan Assembly	(1)		G.	Nosing Anti-sweat Heaters	(8)	
	0477653 Fan Motor, Evaporator				0524419 8 ft case (HE.4851257)		
	(MO.4410544)				0524421 12 ft case (HE.4851259)		
	0252116 Fan Blade (FB.4780611)			H.	Return Grille Anti-sweat Heaters	(9)	
B.	Optional Adjustable Refrigeration Thermostat	(2)			0524427 8 ft case (HE.4851251)		
C.	0398557 Defrost Termination Thermostat	(3)			0524429 12 ft case (HE.4851253)		
	(Electric Defrost only)			J.	Return Glass Anti-sweat Heaters	(10)	
	(CT.4440611)				0474778 8 ft case (GL.4987838)		
D.	0481370 Heater Switch	(4)			0474779 12 ft case (GL.4987839)		
	(Koolgas Defrost only)			<b>GLASS LID PARTS ARE LISTED ON PAGE 5.</b>			
	(CT.4440738)			<b>OPTIONAL LED FIXTURES AND POWER SUPPLY</b>			
<b>HEATERS</b>				E.	208V Evaporator Defrost Heaters	(5)	
	0462159 8 ft case (HE.4850603)				K.	0501213 Power Supply (EP.4481861)	(11)
	0444058 12 ft case (HE.4850571)				L.	LED Fixture	(12)
F.	208V Drip Pan Defrost Heaters, Electric	(6)		<b>NOTE: For LED lighting parts contact your Hussmann service representative at 1-800-922-1919. Please have your model and serial number available. Descriptions including size and color are at <a href="http://WWW.HUSSMANN.COM/SERVICEANDPARTS">WWW.HUSSMANN.COM/SERVICEANDPARTS</a>.</b>			
	0462160 8 ft case (HE.4850636)						
	0444296 12 ft case (HE.4850572)						
	120V Drip Pan Defrost Heaters, Koolgas	(7)					
	0465907 8 ft case (HE.4850622)						
	0465908 12 ft case (HE.4850623)						


Datasheet-Excel FG-L

Note: Revision B updated Refrigeration Data on page 3.

# Engineering Plan Views

PHYSICAL DATA	
Merchandiser Drip Pipe (in.)	1 1/4
Merchandiser Liquid Line (in.)	3/8
Merchandiser Suction Line (in.)	5/8

## Low / Medium Temperature

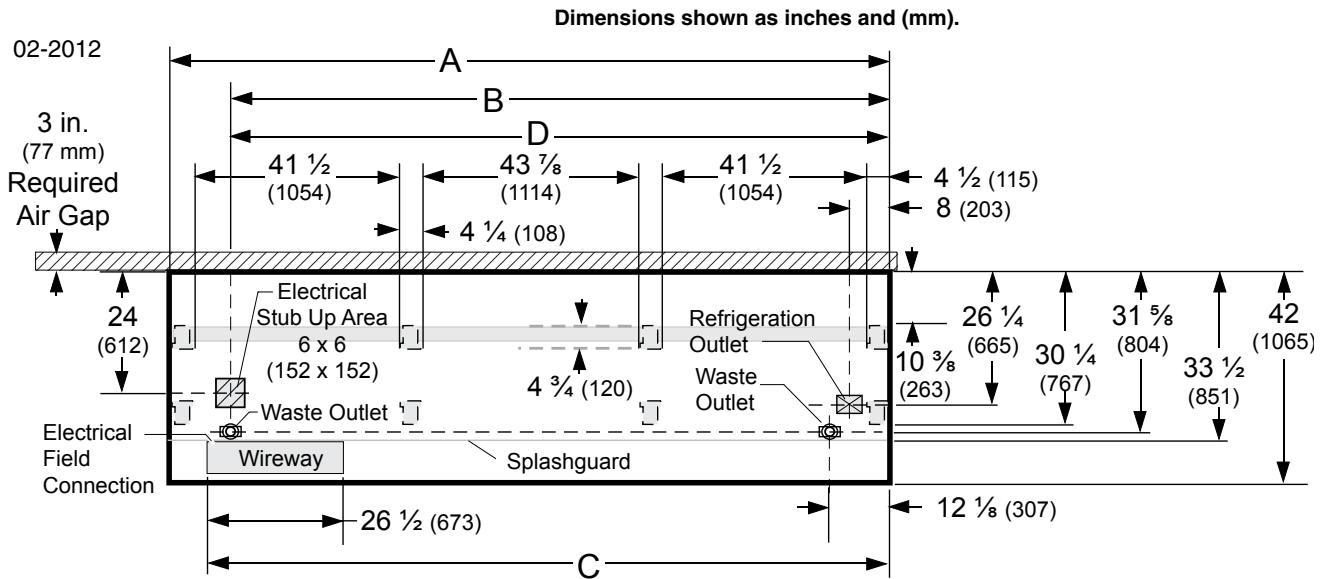

**NOTE: Case-to-Case Electrical Connections are made IN FRONT OF SPLASHGUARD.** FRONT

	8 ft	12 ft
<b>General</b>		
<b>(A)</b> Case Length ( <i>without ends or partitions</i> ) (Each end and insulated partition adds 2 in. (51 mm) to case line up.) Maximum O/S dimension of case back to front ( <i>includes bumper</i> ) Back of case to front of splashguard Back of case to O/S edge of front leg Distance between edges of external legs and center legs Distance between edges of center legs Distance between front legs and splashguard	96 3/8 (2448)	144 1/2 (3670)
<b>Electrical Service</b> <input checked="" type="checkbox"/> ( <i>Electrical Field Wiring connection point</i> )		
<b>(B)</b> RH End of case to center of stub up area Back of case to center of stub up area Length of electrical wireway <input type="checkbox"/> Wireway	84 1/4 (2140)	132 3/8 (3363)
<b>(C)</b> RH End of case to LH end of wireway	24 (612)	24 (612)
	26 1/2 (673)	26 1/2 (673)
	90 1/8 (2289)	138 1/4 (3511)
<b>Waste Outlets</b> ( <i>One each end</i> ) <input checked="" type="checkbox"/>		
<b>(D)</b> RH End of case to the center of LH waste outlet RH End of case to the center of RH waste outlet Back O/S of case to center of waste outlets Schedule 40 PVC drip pipe	84 1/4 (2140)	132 3/8 (3363)
	12 1/8 (307)	12 1/8 (307)
	31 5/8 (804)	31 5/8 (804)
	1 1/4 (32)	1 1/4 (32)
<b>Refrigeration Outlet</b> <input type="checkbox"/>		
Back of case to center of refrigeration outlet RH end of case to center of refrigeration outlet	26 1/4 (665)	26 1/4 (665)
	8 (203)	8 (203)

Single Deck Wall Display with Glass Front and Lids



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2012 energy efficiency standards.

**Excel FG-L**  
**Low / Medium Temperature**

**REFRIGERATION DATA**

**Note:** This data is based on store temperature and humidity that does not exceed 75°F and 55% R.H.

	MED	FF	IC
<b>Discharge Air (°F)</b>	+32	-10	-16
<b>Evaporator (°F)</b>	+25	-18	-24
<b>Unit Sizing (°F)</b>	+23	-21	-27

<i>Btu/hr/ft *</i>	MED	FF	IC
<b>Parallel</b>	130	180	210
<b>Conventional</b>	135	185	220

\* Add 1.5 Btu/hr/ft for LED lighting.

**DEFROST DATA**

	MED	FF	IC
<b>Frequency (hr)</b>	24	24	24
<b>Defrost Water (lb/ft/day)</b>	0.25	0.29	0.3

(± 15% based on case configuration and product loading).

<i>ELECTRIC</i>	MED	FF	IC
<b>Temp Term (°F)</b>	48	48	48
<b>Failsafe (minutes)</b>	30	50	60

<i>GAS</i>	MED	FF	IC
<b>Duration (minutes)</b>	NA	15	18

**OFFTIME** Not Recommended

**Standard Defrost Thermostat**

Close on rise: close 48°F — open 33°F

**CONVENTIONAL CONTROLS**

**Low Pressure Backup Control — CI/CO \*\***

MED	+28°F / +16°F
FF	-15°F / -27°F
IC	-21°F / -33°F

**Indoor Unit Only, Pressure Defrost Termination\*\***

Not Recommended

\*\*Use a Temperature Pressure Chart to determine PSIG conversions.


**Estimated Charge \*\*\***

8 ft	2.0 lb	32 oz	0.9 kg
12 ft	3.0 lb	48 oz	1.4 kg

\*\*\*This is an average for all refrigerant types. Actual refrigerant charge may vary by approximately 0.5 lb (8 oz / 0.2 kg).

**FG-L**

Dimensions shown as inches and (mm).

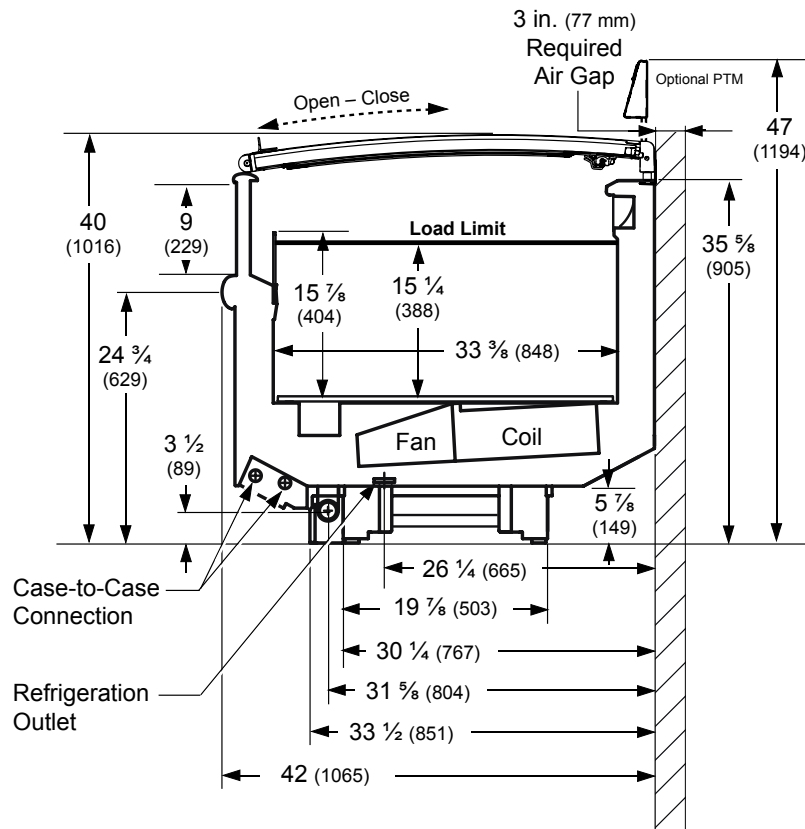

**NSF Certification**

This merchandiser model is manufactured to meet NSF/ANSI (National Sanitation Foundation) Standard #7 requirements for construction, materials & cleanability.

<b>Excel FG-L</b> <b>Low / Medium Temperature</b>
--

**Electrical Data**

	<b>8 ft</b>	<b>12 ft</b>		
<b>Number of Fans – 4W Evaporator</b>	<b>2</b>	<b>2</b>		
	<b>Amperes</b>		<b>Watts</b>	
	<b>8 ft</b>	<b>12 ft</b>	<b>8 ft</b>	<b>12 ft</b>
<b>Evaporator Fans</b>				
120V 50/60Hz Standard Energy Efficient	0.24	0.24	16	16
230V 50/60Hz Standard Energy Efficient	0.12	0.12	16	16
230V 60Hz Export	0.30	0.30	48	48
230V 50Hz Export	0.36	0.36	54	54
<b>Anti-sweat Heaters (on fan circuit)</b>				
120V 50/60Hz Standard	0.34	0.52	41	62
230V 50/60Hz Export	0.18	0.27	41	62
<b>Minimum Circuit Ampacity</b>				
120V 50/60Hz Standard Energy Efficient	0.78	0.96		
230V 50/60Hz Standard Energy Efficient	0.50	0.59		
230V 60Hz Export	0.68	0.77		
230V 50Hz Export	0.74	0.83		
<b>Maximum Over Current Protection 120V</b>	<b>20</b>	<b>20</b>		
Maximum Over Current Protection 230V	15	15		
<b>Return Glass Anti-sweat Heaters</b>				
120V 50/60Hz Standard	0.08	0.11	9	13
230V 50/60Hz Export	0.04	0.06	9	13
<b>208V Electric Defrost</b>	7.69	11.54	1600	2400
<b>230V Export Electric Defrost</b>	6.96	10.43	1600	2400
<b>120V Koolgas Defrost</b>	1.67	3.33	200	400
<b>Standard Lighting</b>				
None				
<b>Optional Lighting</b>				
LED 120V 50/60Hz	0.35	0.49	42	60
LED 230V 50/60Hz	0.18	0.26	42	60

**Product Data**

<i>Recommended Usable Cube</i> <sup>1</sup> (Cu Ft/Ft)	3.69 ft <sup>3</sup> /ft (0.34 m <sup>3</sup> /m)
<i>AHRI Total Display Area</i> <sup>2</sup> (Sq Ft/Ft)	3.02 ft <sup>2</sup> /ft (0.92 m <sup>2</sup> /m)
<i>Shelf Area</i> <sup>3</sup> (Sq Ft/Ft)	2.79 ft <sup>2</sup> /ft (0.85 m <sup>2</sup> /m)

- <sup>1</sup> AHRI Refrigerated Volume less shelving and other unusable space: Refrigerated Volume/Unit of Length, ft<sup>3</sup>/ft [m<sup>3</sup>/m]  
<sup>2</sup> Computed using AHRI 1200 standard methodology: Total Display Area, ft<sup>2</sup> [m<sup>2</sup>]/Unit of Length, ft [m]  
<sup>3</sup> Shelf surface area is composed of bottom deck plus standard shelf complement, as shown in the Hussmann *Product Reference Guide*. The standard shelf complement for this model is NONE.


**ESTIMATED SHIPPING WEIGHT <sup>4</sup>**

Case	<i>4 ft</i>	<i>6 ft</i>	<i>8 ft</i>	<i>12 ft</i>	Solid End (each)
<b>lb (kg)</b>	670 (305)	1100 (506)	1120 (508)	1370 (623)	50 (23)


<sup>4</sup> Actual weights will vary according to optional kits included.

**Glass Lid Replacement Parts**


- |    |         |  |
|----|---------|--|
| S. | 0524238 | Top Glass B00147 (GL.4998375)                |
| T. | 0524239 | Middle Glass B00148 (GL.4998376)             |
| U. | 0524240 | Bottom Glass with Handle B00149 (GL.4998377) |

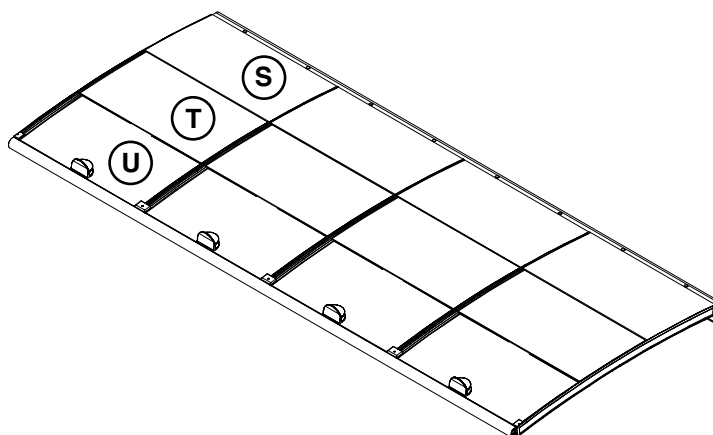



# Electric Defrost – Standard

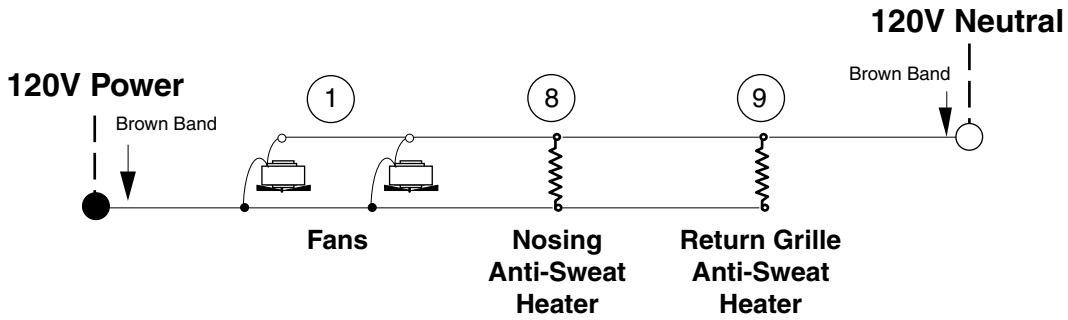


## Refrigeration Thermostat (Optional)

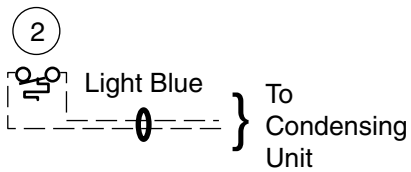

## Defrost Termination Thermostat

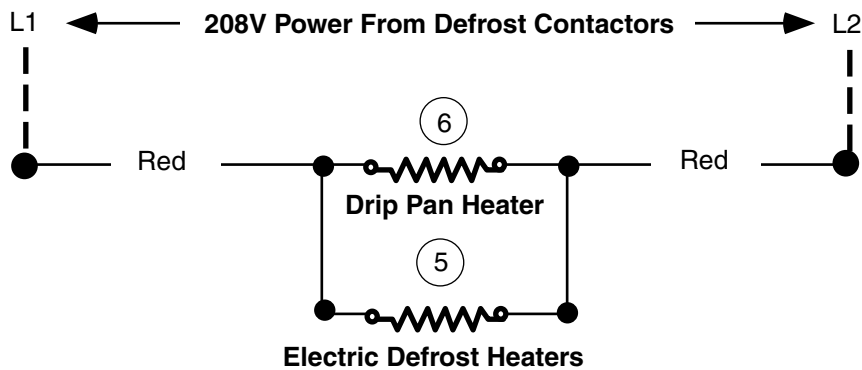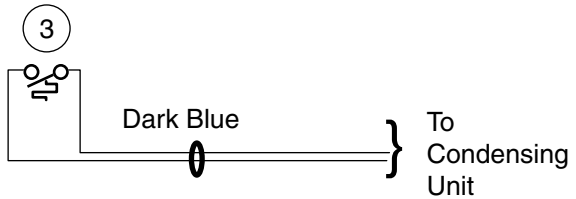


## Return Glass Anti-Sweat Heater

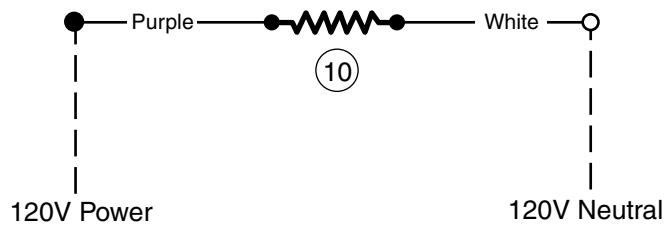

## WARNING

All components must have mechanical ground, and the merchandiser must be grounded.  
 Circled Number = Parts List Item Numbers

# Gas Defrost – Optional

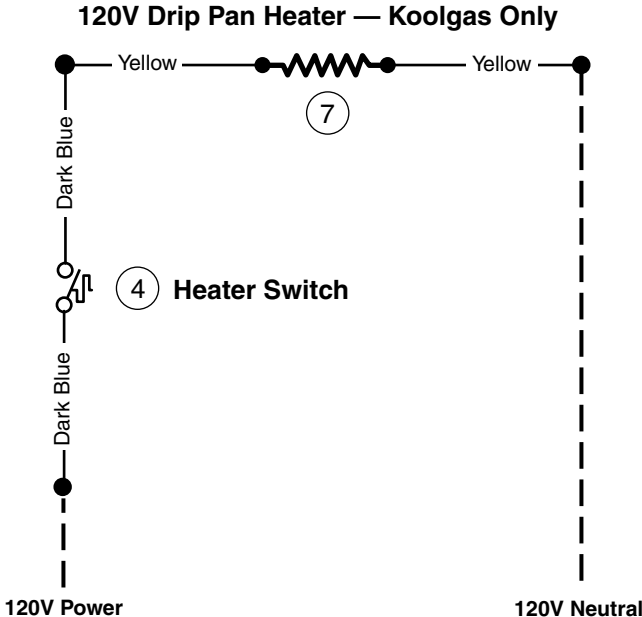

## WARNING

All components must have mechanical ground, and the merchandiser must be grounded.  
Circled Number = Parts List Item Numbers

**Excel FG-L**  
**Low / Medium Temperature**

**Optional LED Lighting**  
**Wiring Diagrams**

