

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

Item	Part #	Description	Wiring Item #	Item	Part #	Description	Wiring Item #
<b>FAN ASSEMBLIES, AND THERMOSTATS</b>				<b>HEATERS (CONTINUED)</b>			
A.	4W Standard Energy Efficient Fan Assembly	(1)	G.	Nosing Anti-sweat Heaters	(8)		
	0477653 Fan Motor, Evaporator (MO.4410544)			0524417 4 ft case (HE.4851255)			
	0464847 Fan Blade (FB.4780649)			0524418 6 ft case (HE.4851256)			
B.	Optional Adjustable Refrigeration Thermostat	(2)		0524419 8 ft case (HE.4851257)			
C.	0398557 Defrost Termination Thermostat	(3)		0524421 12 ft case (HE.4851259)			
	Electric Defrost only (CT.4440611)						
D.	0481370 Heater Switch – Koolgas Defrost only	(4)					
	(CT.4440738)						
<b>HEATERS</b>				<b>GLASS LID PARTS ARE LISTED ON PAGE 5.</b>			
E.	208V Evaporator Defrost Heaters	(5)		<b>OPTIONAL LED FIXTURES AND POWER SUPPLY</b>			
	0481864 4 ft case (HE.4850637)			H.	0501213 Power Supply (EP.4481861)	(9)	
	0444057 6 ft case (HE.4850620)				I.	LED Fixture	(10)
	0462159 8 ft case (HE.4850603)						
	0444058 12 ft case (HE.4850571)						
F.	208V Drip Pan Defrost Heaters, Electric	(6)					
	0481865 4 ft case (HE.4850638)						
	0444300 6 ft case (HE.4850609)						
	0462160 8 ft case (HE.4850636)						
	0444296 12 ft case (HE.4850572)						
	120V Drip Pan Defrost Heaters, Koolgas	(7)					
	0488967 4 ft case (HE.4850641)						
	0465906 6 ft case (HE.4850628)						
	0465907 8 ft case (HE.4850622)						
	0465908 12 ft case (HE.4850623)						

Datasheet-Excel FN-L

Note: Revision D updated plan view and cross section.


# Engineering Plan Views

PHYSICAL DATA	
Merchandiser Drip Pipe (in.)	1 1/4
Merchandiser Liquid Line (in.)	3/8
Merchandiser Suction Line (in.)	5/8

## Low / Medium Temperature



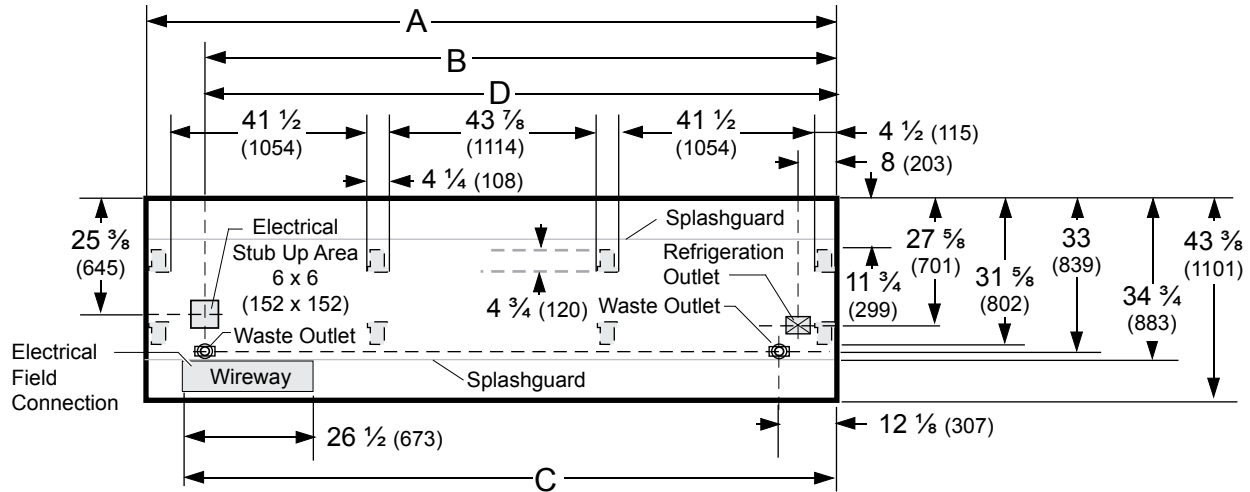

02-2012

Dimensions shown as inches & (mm).



**NOTE: Case-to-Case Electrical Connections are made IN FRONT OF SPLASHGUARD.**

FRONT

	4 ft	6 ft	8 ft	12 ft
<b>General</b>				
<b>(A)</b> Case Length ( <i>without ends or partitions</i> )	48 1/4 (1226)	73 3/4 (1873)	96 3/8 (2448)	144 1/2 (3670)
<i>(Each end and insulated partition adds 2 in. (51 mm) to case line up.)</i>				
Maximum O/S dimension of case back to front ( <i>includes bumper</i> )	43 3/8 (1101)	43 3/8 (1101)	43 3/8 (1101)	43 3/8 (1101)
Back of case to front of splashguard	34 3/4 (884)	34 3/4 (884)	34 3/4 (884)	34 3/4 (884)
Back of case to O/S edge of front leg	31 5/8 (802)	31 5/8 (802)	31 5/8 (802)	31 5/8 (802)
Distance between edges of external legs and center legs	NA	30 1/4 (768)	41 1/2 (1054)	41 1/2 (1054)
Distance between edges of center legs	NA	NA	NA	43 7/8 (1114)
Distance between front legs and splashguard	3 1/8 (82)	3 1/8 (82)	3 1/8 (82)	3 1/8 (82)
<b>Electrical Service</b>  ( <i>Electrical Field Wiring connection point</i> )				
<b>(B)</b> RH End of case to center of stub up area	36 1/8 (9018)	61 5/8 (1565)	84 1/4 (2141)	132 3/8 (3363)
Back of case to center of stub up area	25 3/8 (645)	25 3/8 (645)	25 3/8 (645)	25 3/8 (645)
Length of electrical wireway 	26 1/2 (673)	26 1/2 (673)	26 1/2 (673)	26 1/2 (673)
<b>(C)</b> RH End of case to LH end of wireway	40 1/2 (1029)	67 1/2 (1715)	90 1/8 (2289)	138 1/4 (3511)
<b>Waste Outlets</b> ( <i>One each end</i> ) 				
<b>(D)</b> RH End of case to the center of LH waste outlet	36 1/8 (918)	61 5/8 (1565)	84 1/4 (2141)	132 3/8 (3363)
RH End of case to the center of RH waste outlet	12 1/8 (307)	12 1/8 (307)	12 1/8 (307)	12 1/8 (307)
Back O/S of case to center of waste outlets	33 (839)	33 (839)	33 (839)	33 (839)
Schedule 40 PVC drip pipe	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)
<b>Refrigeration Outlet</b> 				
Back of case to center of refrigeration outlet	27 5/8 (701)	27 5/8 (701)	27 5/8 (701)	27 5/8 (701)
RH end of case to center of refrigeration outlet	8 (203)	15 (381)	8 (203)	8 (203)

Narrow Island Display with Solid Walls and Lids

**DOE 2012**  
Energy Efficiency  
Compliant

Husmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2012 energy efficiency standards.

**Excel FN-L**  
**Low / Medium Temperature**

**REFRIGERATION DATA**

**Note:** This data is based on store temperature and humidity that does not exceed 75°F and 55% R.H.

	MED	FF	IC
<b>Discharge Air (°F)</b>	+32	-10	-19
<b>Evaporator (°F)</b>	+25	-15	-24
<b>Unit Sizing (°F)</b>	+23	-18	-27

<b>Btu/hr/ft*</b>	MED	FF	IC
<b>Parallel</b>	110	146	171
<b>Conventional</b>	112	153	179

\* Add 1.5 Btu/hr/ft for LED lighting.

**DEFROST DATA**

	MED	FF	IC
<b>Frequency (hr)</b>	24	24	24
<b>Defrost Water (lb/ft/day)</b>	0.2	0.19	0.15

(± 15% based on case configuration and product loading).

<b>ELECTRIC</b>	MED	FF	IC
<b>Temp Term (°F)</b>	48	48	48
<b>Failsafe (minutes)</b>	30	50	60

<b>GAS</b>	MED	FF	IC
<b>Duration (minutes)</b>	NA	15	18

**OFFTIME** Not Recommended

**Standard Defrost Thermostat**

Close on rise: close 48°F — open 33°F

**CONVENTIONAL CONTROLS**

**Low Pressure Backup Control — CI/CO \*\***

MED	+28°F / +16°F
FF	-15°F / -27°F
IC	-21°F / -33°F

**Indoor Unit Only, Pressure Defrost Termination\***

Not Recommended


\*\*Use a Temperature Pressure Chart to determine PSIG conversions.

<b>Estimated Charge ***</b>	<b>FN-L</b>	
<b>4 ft</b>	1.0 lb	16 oz 0.5 kg
<b>6 ft</b>	1.5 lb	24 oz 0.7 kg
<b>8 ft</b>	2.0 lb	32 oz 0.9 kg
<b>12 ft</b>	3.0 lb	48 oz 1.4 kg

\*\*\*This is an average for all refrigerant types. Actual refrigerant charge may vary by approximately half a pound (8 oz/0.2 kg).

**FN-L**

Dimensions shown as inches & (mm).

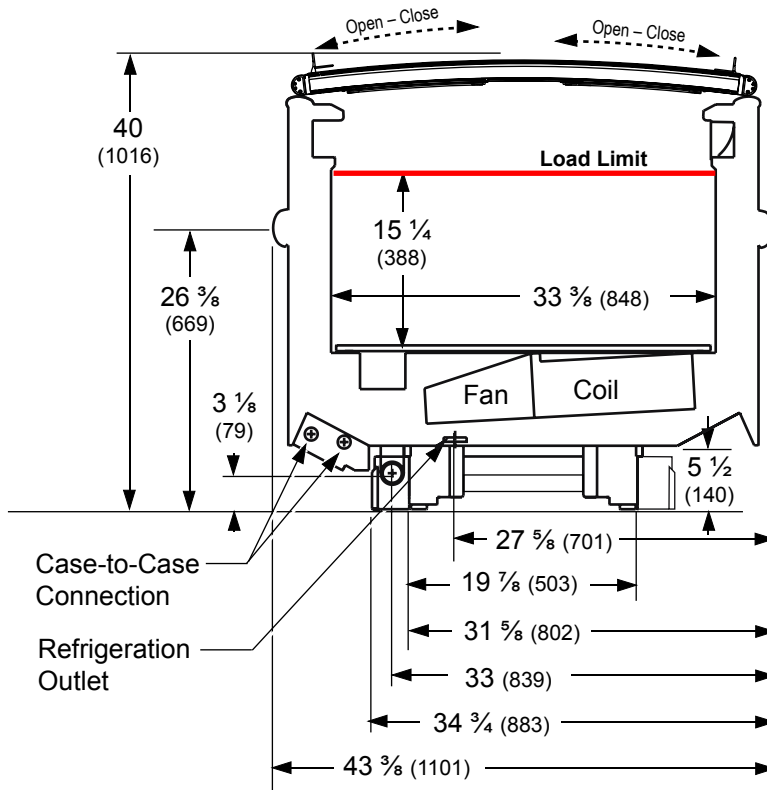

**NSF Certification**

This merchandiser model is manufactured to meet NSF/ANSI (National Sanitation Foundation) Standard #7 requirements for construction, materials & cleanability.

**Electrical Data**

			4 ft	6 ft	8 ft	12 ft				
<b>Number of Fans – 4W Evaporator</b>			<b>1</b>	<b>1</b>	<b>2</b>	<b>2</b>				
			<b>Amperes</b>				<b>Watts</b>			
			4 ft	6 ft	8 ft	12 ft	4 ft	6 ft	8 ft	12 ft
<b>Evaporator Fans</b>										
120V	50/60Hz	Standard Energy Efficient	0.12	0.12	0.24	0.24	8	8	16	16
230V	50/60Hz	Standard Energy Efficient	0.06	0.06	0.12	0.12	8	8	16	16
230V	60Hz	Export	0.15	0.15	0.30	0.30	24	24	48	48
230V	50Hz	Export	0.18	0.18	0.36	0.36	27	27	54	54
<b>Anti-sweat Heaters (on fan circuit)</b>										
120V	50/60Hz	Standard	0.14	0.20	0.26	0.40	16	24	32	48
230V	50/60Hz	Export	0.07	0.10	0.14	0.21	16	24	32	48
<b>Minimum Circuit Ampacity</b>										
120V	50/60Hz	Standard Energy Efficient	0.45	0.52	0.70	0.84				
230V	50/60Hz	Standard Energy Efficient	0.34	0.36	0.46	0.53				
230V	60Hz	Export	0.58	0.45	0.64	0.71				
230V	50Hz	Export	0.46	0.48	0.70	0.77				
<b>Maximum Over Current Protection 120V</b>			<b>20</b>	<b>20</b>	<b>20</b>	<b>20</b>				
<b>Maximum Over Current Protection 230V</b>			<b>15</b>	<b>15</b>	<b>15</b>	<b>15</b>				
<b>208V Electric Defrost</b>			4.4	6.54	7.69	11.54	910	1360	1600	2400
<b>230V Export Electric Defrost</b>			3.8	5.91	6.96	10.43	800	1360	1600	2400
<b>120V Koolgas Defrost</b>			0.92	1.33	1.67	3.33	110	160	200	400
<b>Standard Lighting</b>										
None										
<b>Optional Lighting</b>										
LED	120V	50/60Hz	0.18	0.24	0.30	0.42	22	29	36	50
LED	230V	50/60Hz	0.10	0.13	0.17	0.22	22	29	36	50

**Product Data**

<b>Recommended Usable Cube <sup>1</sup> (Cu Ft/Ft)</b>	3.54 ft <sup>3</sup> /ft (0.33 m <sup>3</sup> /m)
<b>AHRI Total Display Area <sup>2</sup> (Sq Ft/Ft)</b>	2.60 ft <sup>2</sup> /ft (0.79 m <sup>2</sup> /m)
<b>Shelf Area <sup>3</sup> (Sq Ft/Ft)</b>	2.78 ft <sup>2</sup> /ft (0.85 m <sup>2</sup> /m)

- <sup>1</sup> AHRI Refrigerated Volume less shelving and other unusable space: Refrigerated Volume/Unit of Length, ft<sup>3</sup>/ft [m<sup>3</sup>/m]
- <sup>2</sup> Computed using AHRI 1200 standard methodology: Total Display Area, ft<sup>2</sup> [m<sup>2</sup>]/Unit of Length, ft [m]
- <sup>3</sup> Shelf surface area is composed of bottom deck plus standard shelf complement, as shown in the Hussmann **Product Reference Guide**. The standard shelf complement for this model is NONE.

**ESTIMATED SHIPPING WEIGHT <sup>4</sup>**

Case	4 ft	6 ft	8 ft	12 ft	Solid End (each)
<b>lb (kg)</b>	673 (306)	905 (411)	1140 (517)	1400 (636)	50 (23)

<sup>4</sup> Actual weights will vary according to optional kits included.


**Glass Lid Replacement Parts**

**FN4L, FN8L, FN12L GLASS ASSEMBLIES**

- S. 0524244 Top Glass - Fixed B00153 (GL.4998369)
- T. 0524245 Middle Glass with Handle B00154 (GL.4998370)
- U. 0524246 Bottom Glass with Handle B00155 (GL.4998371)


**FN6L GLASS ASSEMBLIES**

- S. 0524256 Top Glass - Fixed B00165 (GL.4998372)
- T. 0524257 Middle Glass with Handle B00166 (GL.4998373)
- U. 0524258 Bottom Glass with Handle B00167 (GL.4998374)

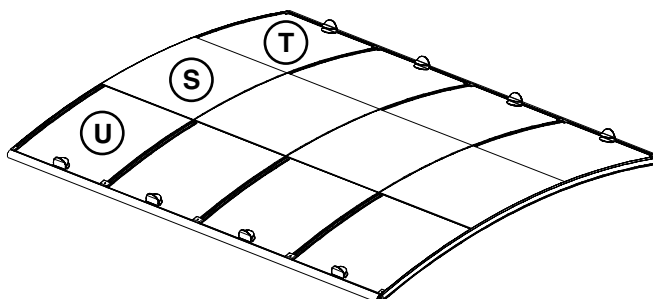


# Electric Defrost – Standard



- 4 Ft – 1 Fan
- 6 Ft – 1 Fan
- 8 Ft – 2 Fans
- 12 Ft – 2 Fans

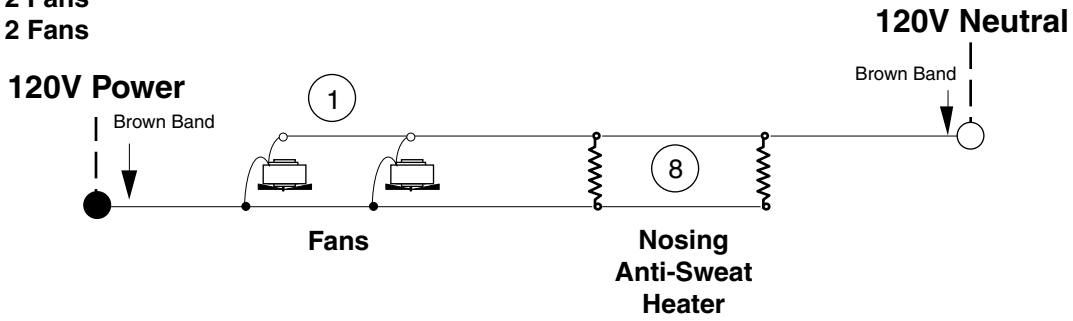

## Refrigeration Thermostat (Optional)

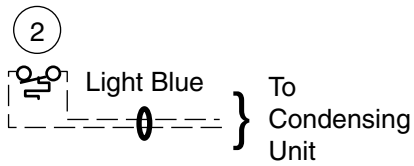


## Defrost Termination Thermostat

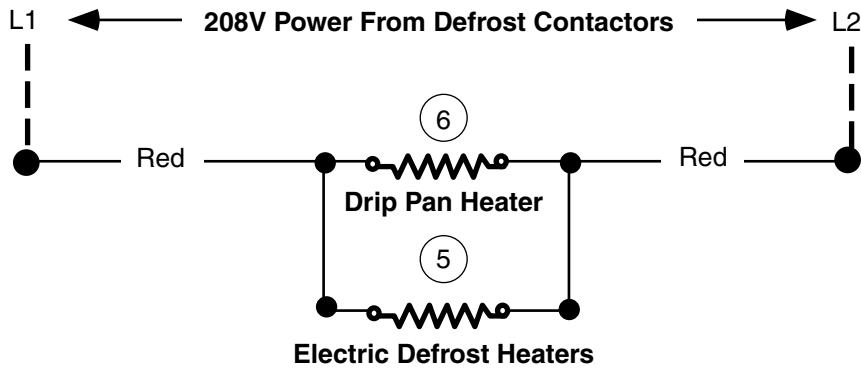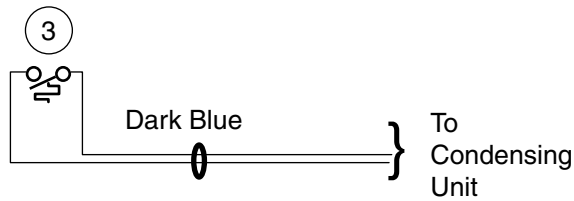

## WARNING

All components must have mechanical ground, and the merchandiser must be grounded.  
 Circled Number = Parts List Item Numbers


# Gas Defrost – Optional

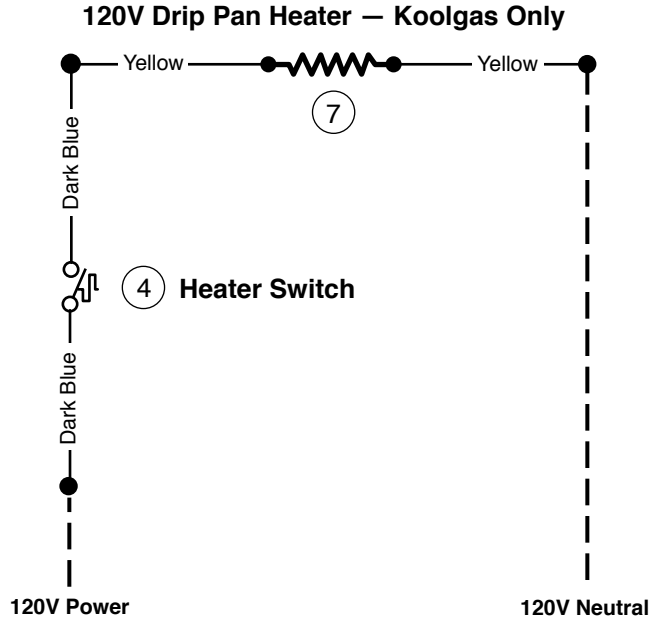

## WARNING


All components must have mechanical ground, and the merchandiser must be grounded.  
Circled Number = Parts List Item Numbers

## Optional LED Lighting Wiring Diagrams

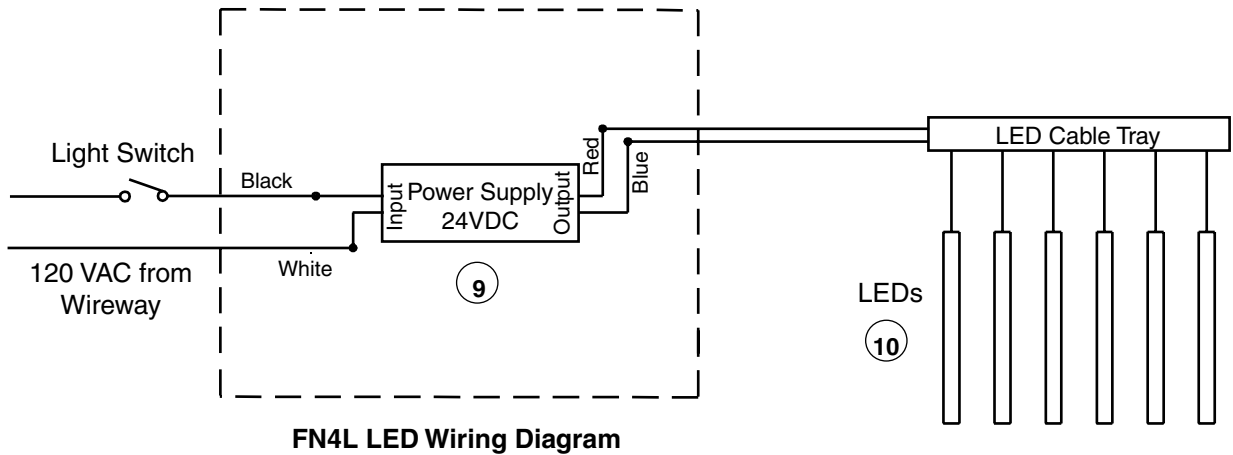


**Excel FN-L**  
**Low / Medium Temperature**


**Optional LED Lighting**  
**Wiring Diagrams**

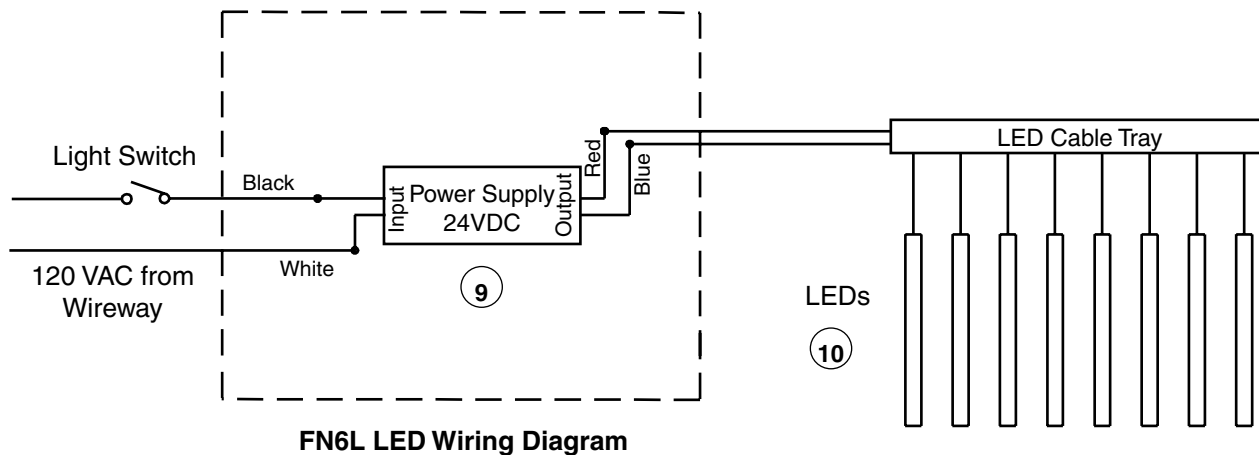

**FN6L LED Wiring Diagram**

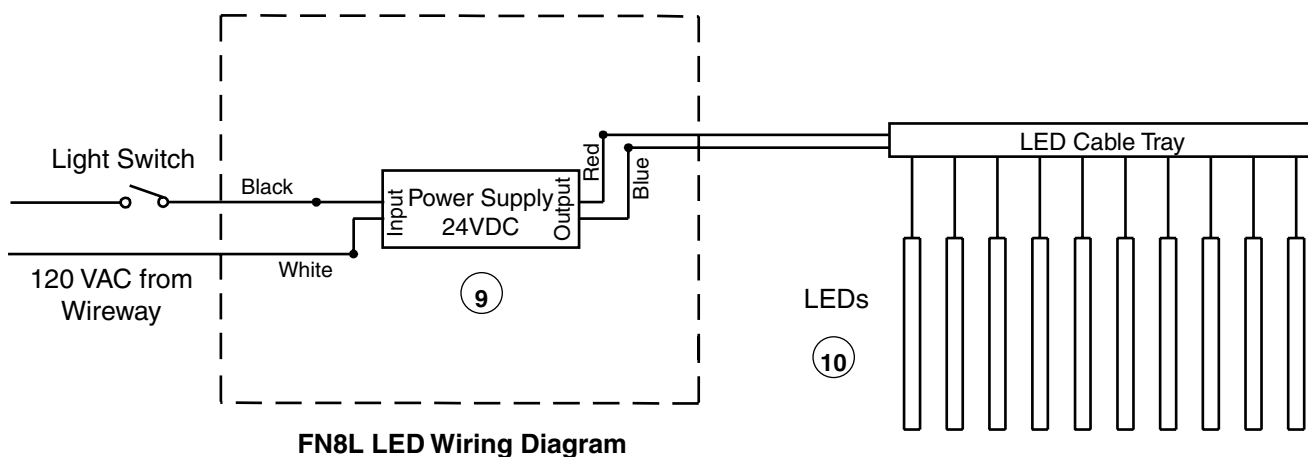

**FN8L LED Wiring Diagram**

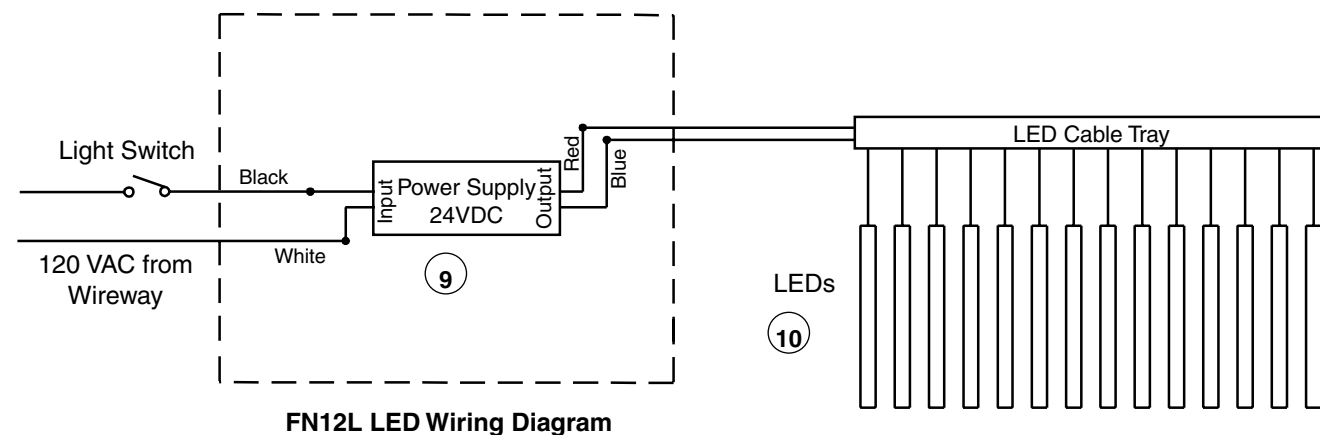

**FN12L LED Wiring Diagram**