

# HUSSMANN®



## ***NAV & NAVC Medium Temperature Service Deli Self Contained Merchandisers***



## ***Installation & Service Manual***

**IMPORTANT**  
Keep in store for future reference!

**P/N 2400204\_E**

January 2011





# ATTENTION

Merchandiser must operate for 24 hours  
before loading product!

Regularly check merchandiser temperatures.

Do not break the cold chain. Keep products  
in cooler before loading into merchandiser.

These merchandisers are designed  
for pre-chilled products only.



IMPORTANT  
KEEP IN STORE FOR FUTURE REFERENCE  
*Quality that sets industry standards!*

**HUSSMANN**®

12999 St. Charles Rock Road • Bridgeton, MO 63044-2483

U.S. & Canada 1-800-922-1919 • Mexico 1-800-522-1900

[www.hussmann.com](http://www.hussmann.com)

© 2011 Hussmann Corporation



# TABLE OF CONTENTS

v

## ANSI DEFINITIONS ..... vi

### INSTALLATION

Certification .....	1-1
Husmann Product Control .....	1-1
Shipping Damage .....	1-1
Location .....	1-1
Self Contained (Location) .....	1-2
Model Description .....	1-3
Unloading .....	1-3
Exterior Loading .....	1-3
Shipping Skid .....	1-4
Merchandiser Leveling .....	1-4
Optional Legs .....	1-4
Serial Plate Location .....	1-4
Light Switch .....	1-4
Refrigeration Unit Access .....	1-4
Sealing Merchandiser to Floor .....	1-4

### ELECTRICAL / REFRIGERATION

Merchandiser Electrical Data .....	2-1
Field Wiring .....	2-1
Electrical Connections .....	2-1
Power Input .....	2-1
Electrical Outlet .....	2-1
Refrigeration (Self Contained) .....	2-2
Waste Outlet .....	2-2
Electromechanical Controls .....	2-3
Defrost Time Clock .....	2-3
Setting Defrost Times .....	2-4
Temperature Control .....	2-4

### START UP / OPERATION

Start-Up .....	3-1
Controls and Adjustments .....	3-1
Load Limits .....	3-2
Stocking .....	3-2
Shelf Maximum Weight Limits .....	3-3
Pencil Thermometer .....	3-4

### MAINTENANCE

Care and Cleaning .....	4-1
Do NOT Use: .....	4-1
Do: .....	4-1
Cleaning Stainless Steel Surfaces .....	4-2
Cleaning Pencil Thermometer .....	4-2
Cleaning the Bottom Deck .....	4-2
Cleaning Coils .....	4-3
Cleaning Evaporation Pan .....	4-3
Removing Scratches from Bumper .....	4-4

### SERVICE

Replacing Fluorescent Lamps .....	5-1
Troubleshooting Guide .....	5-1
Troubleshooting Light Guide .....	5-2

### APPENDIX

Part Numbers .....	A-1
Plan Views .....	A-3
Cross Sections and Refrigeration Data ..	A-5
Electrical Data .....	A-6
Shipping Weights and Amps .....	A-7
Wiring Diagrams .....	A-8

### WARRANTY

## REVISION HISTORY

### REVISION E — *JANUARY 2011*

1. Added Location Drawing, Page 1-2
2. Added Light Switch, Refrigeration Unit Access, Page 1-4
3. Added Appendix A, Technical Data

\*\*\*\*\*

## ANSI Z535.5 DEFINITIONS



• **DANGER** – Indicate[s] a hazardous situation which, if not avoided, will result in death or serious injury.



• **WARNING** – Indicate[s] a hazardous situation which, if not avoided, could result in death or serious injury.



• **CAUTION** – Indicate[s] a hazardous situation which, if not avoided, could result in minor or moderate injury.

• **NOTICE** – *Not related to personal injury* – Indicates[s] situations, which if not avoided, could result in damage to equipment.

## INSTALLATION

### CERTIFICATION

These merchandisers are manufactured to meet ANSI / National Sanitation Foundation (NSF®) Standard #7 requirements. Proper installation is required to maintain certification. Near the serial plate, each case carries a label identifying the type of application for which the case was certified.

**ANSI/NSF-7 Type I - Display Refrigerator / Freezer  
Intended for 75°F / 55% RH Ambient Application**

**ANSI/NSF-7 Type II - Display Refrigerator / Freezer  
Intended for 80°F / 55% RH Ambient Application**

**ANSI/NSF-7 - Display Refrigerator  
Intended for Bulk Produce**

### HUSSMANN PRODUCT CONTROL

The serial number and shipping date of all equipment is recorded in Hussmann's files for warranty and replacement part purposes. All correspondence pertaining to warranty or parts ordering must include the serial number of each piece of equipment involved. This is to ensure the customer is provided with the correct parts.

### SHIPPING DAMAGE

All equipment should be thoroughly examined for shipping damage before and during unloading. This equipment has been carefully inspected at our factory. Any claim for loss or damage must be made to the carrier. The carrier will provide any necessary inspection reports and/or claim forms.

### Apparent Loss or Damage

If there is an obvious loss or damage, it must be noted on the freight bill or express receipt and signed by the carrier's agent; otherwise, carrier may refuse claim.

### Concealed Loss or Damage

When loss or damage is not apparent until after equipment is uncrated, retain all packing materials and submit a written response to the carrier for inspection within 15 days.

### LOCATION


These merchandisers are designed for displaying products in air conditioned stores where temperature is maintained at or below the ANSI / NSF-7 specified level and relative humidity is maintained at or below 55%.

**Recommended operating ambient  
temperature is between  
65°F (18°C) and 80°F (26.7°C).  
Maximum relative humidity is 55%.**

Placing refrigerated merchandisers in direct sunlight, near hot tables or near other heat sources could impair their efficiency. Like other merchandisers, these merchandisers are sensitive to air disturbances. Air currents passing around merchandisers will seriously impair their operation. Do NOT allow air conditioning, electric fans, open doors or windows, etc. to create air currents around the merchandiser.

**SELF CONTAINED (LOCATION)**

NAV and NAVC merchandiser models have front-facing condenser air intake and air discharge. Maintain a minimum clearance distance of 2 feet in front of the merchandiser and 4 inches on each side, so that air discharge and air intake are not obstructed.

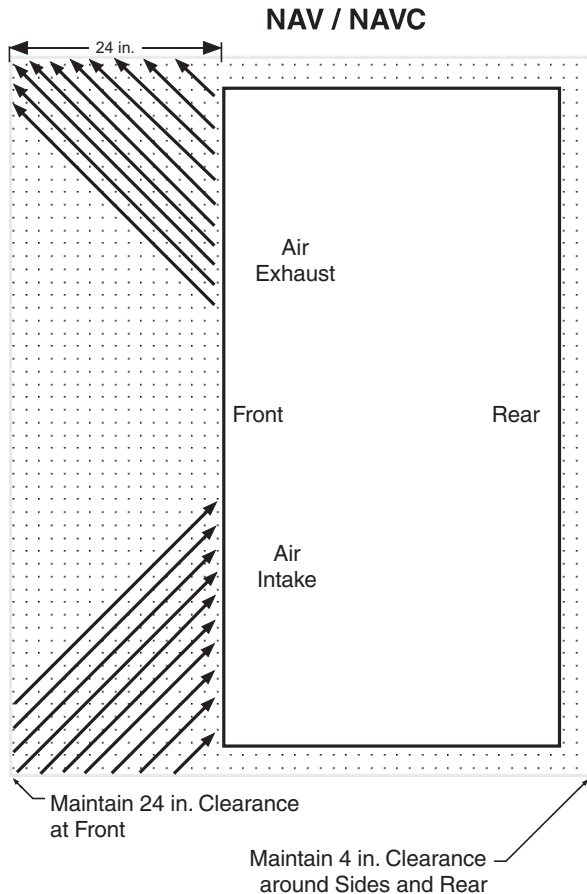**MODEL DESCRIPTION**

NAV/C service deli merchandisers offer versatility in the display of medium temperature (32° F to 41° F) products such as dairy products, prepared salads, pizza and fresh dinners that are pre-chilled in a cooler. Carefully read and follow the instructions before operating the merchandiser.

**UNLOADING****Unloading from Trailer:**

Lever Bar (also known as a Mule, Johnson Bar, J-bar, Lever Dolly, or Pry Lever)

Move the merchandiser as close as possible to its permanent location and remove all packaging. Check for damage before discarding packaging. Remove all separately packed accessories such as kits and shelves. Improper handling may cause damage to the merchandiser when unloading. To avoid damage:

1. Do not drag the merchandiser out of the trailer. Use a Johnson Bar, J-bar, Lever Dolly, or Pry Lever)
2. Use a forklift or dolly to remove the merchandiser from the trailer.



## EXTERIOR LOADING

**Do NOT walk on top of merchandisers** or damage to the merchandisers and serious personal injury could occur.

MERCHANDISERS ARE NOT STRUCTURALLY DESIGNED TO SUPPORT EXTERNAL LOADING such as the weight of a person. Do not place heavy objects on the merchandiser.

## SHIPPING SKID

Each merchandiser is shipped on a skid to protect the merchandiser's base, and to make positioning the case easier.

Do not remove the shipping skid until the merchandiser is near its final location. The skid provides protection for both the merchandiser and the floor.

Remove the skid by raising one end of the merchandiser approximately 6 inches. Block the merchandiser securely, and remove the two skid bolts from the raised end. Replace the bolts with (provided) leg levelers. Repeat this procedure at opposing end. Once the leg levelers are secured in place, the merchandiser may be slid off the skid and placed in its final location.

## DO NOT TILT MERCHANDISER ON ITS SIDE OR END WHEN REMOVING SKID.


Once the skid is removed, the merchandiser must be lifted —NOT PUSHED— to reposition.

Check floor where merchandisers are to be set to see if it is a level area. Determine the highest part of the floor.



## MERCHANDISER LEVELING

BE SURE TO POSITION MERCHANDISERS PROPERLY. Level the merchandiser by all four corners. Merchandiser(s) must be installed level to ensure proper operation of the refrigeration system, and to ensure proper drainage of defrost water.

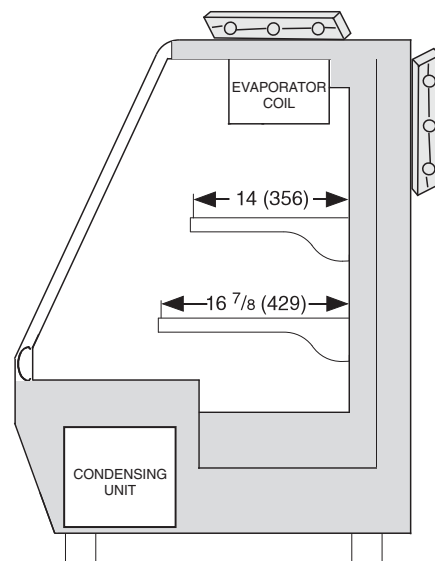

## OPTIONAL LEGS

NSF® approved legs replace the leg levelers if required by local health codes. The legs raise the case 6 inches for cleaning purposes. An optional skirt kit can be provided to snap on the legs.

# 1-4 INSTALLATION

## SERIAL PLATE LOCATION

The serial plate is located in the top interior at the left side of the merchandiser. It contains all pertinent information such as model, serial number, amperage rating, refrigerant type and charge. This information will be needed to maintain, service or order parts for the merchandiser.



## LIGHT SWITCH



The light switch is located at the rear of the merchandiser. Ensure it is switched ON to turn on the display lights.



Light Switch

## REFRIGERATION UNIT ACCESS

The lower front panel may be removed by lifting the panel upward and over the tabs on which it is hanging. The panel is replaced by reversing the above procedure.

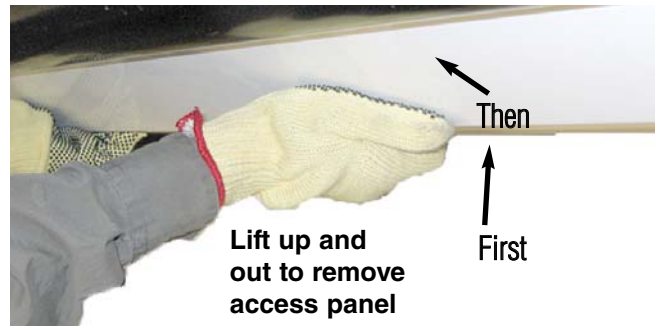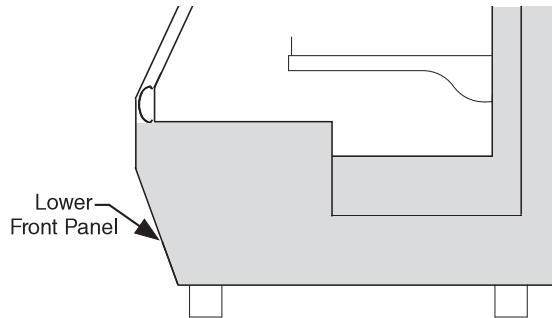

## SEALING MERCHANDISER TO FLOOR

If required by local sanitary codes, or if the customer desires, merchandisers may be sealed to the floor using a vinyl cove base trim. The size needed will depend on how much variation there is in the floor, from one end of the merchandiser to the other. Sealing of the lower front and rear panels on self contained models may hamper their removal for servicing or maintenance of the condensing unit.

**NOTE:** Do not allow trim to cover any intake or discharge grilles located in the lower front panel.

## ELECTRICAL / REFRIGERATION

### MERCHANDISER ELECTRICAL DATA

Refer to Appendix A of this manual or the merchandiser's serial plate for electrical information.

### FIELD WIRING

Field wiring must be sized for component amperes stamped on the serial plate. Actual ampere draw may be less than specified.

**ALWAYS CHECK THE SERIAL PLATE FOR COMPONENT AMPERES**

### ELECTRICAL CONNECTIONS

All wiring must be in compliance with NEC and local codes.

### POWER INPUT

NAV / NAVC merchandisers are provided with 3-Amp power receptacles. ELECTRICAL EQUIPMENT CONNECTED TO THE RECEPTACLE MUST NOT EXCEED 3 AMPS. The receptacle is in series with a GFCI safety device.

NAV / NAVC merchandisers do not have a power switch. Once power cord is connected to power, the merchandiser is energized.

The refrigeration thermostat has an OFF position that disconnects power to the CONDENSING UNIT ONLY.


### CAUTION

**Risk of Electric Shock. If cord or plug becomes damaged, replace only with a cord and plug of the same type.**


### ELECTRICAL OUTLET:

Before the merchandiser is connected to any wall circuit, use a voltmeter to check that the outlet is at 100% of the rated voltage. The wall circuit must be dedicated for the merchandiser. Failure to do so voids the warranty. Do not use an extension cord. Never plug in more than one merchandiser per electrical circuit.

- Always use a dedicated circuit with the amperage stated on the unit.
- Plug into an outlet designed for the plug.
- Do not overload the circuit
- Do not use long or thin extension cords. Never use adapters.
- If in doubt, call an electrician.



NEMA 5-15P  
Receptacle  
NAV / C  
4 & 6



NEMA 5-15P  
Receptacle  
NAV / C  
8

### WARNING

— LOCK OUT / TAG OUT —

***To avoid serious injury or death from electrical shock, always disconnect the electrical power at the main disconnect when servicing or replacing any electrical component. This includes, but is not limited to, such items as doors, lights, fans, heaters, and thermostats.***

### WARNING

**Merchandiser must be grounded.  
Do not remove the power supply cord ground.**

## REFRIGERATION (Self Contained Models)

Each self contained model is equipped with its own condensing unit and control panel located beneath the display area. The correct type of refrigerant will be stamped on each merchandiser's serial plate. The merchandiser refrigeration piping is leak tested. The unit is charged with refrigerant, and shipped from the factory with all service valves open.

NAV/C models have a refrigeration system that uses a hermetic compressor and a capillary tube for refrigerant control. The capillary tube is soldered to the suction line pull-out coil for proper heat exchange. **If the capillary should become plugged or damaged, it is best to replace the heat exchanger.**



## WARNING

**Refrigeration lines are under pressure. Refrigerant must be recovered before attempting any connection or repair.**

## WASTE OUTLET

For self contained models like NAV / NAVC, condensate waste from defrost, drains into a condensate pan located beneath the merchandiser. The condensate pan has a hot gas loop that evaporates waste. **Ensure the drain hose is properly trapped, and the drain area is not clogged. Ensure waste outlet cap is fitted securely in place.**




Waste Outlet

**NOTE:** All lower base panels must be in place when the merchandiser is operating. If not, airflow from the condenser will be directed over the evaporator pan and defrost waste in the pan may overflow.

**ELECTROMECHANICAL CONTROLS**


These merchandisers require defrost cycles for proper operation. Defrosts are time initiated and time terminated. The defrost timer duration is factory set.

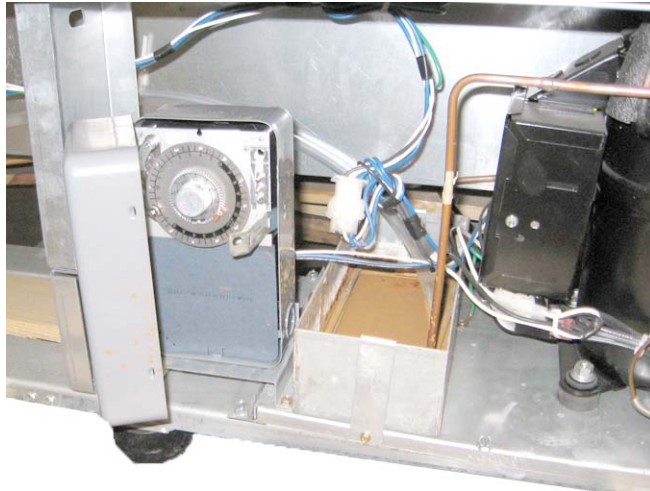

Access Panel Removed

**DEFROST TIME CLOCK**

To access the defrost time clock remove the front access panel, and remove the electrical box cover.

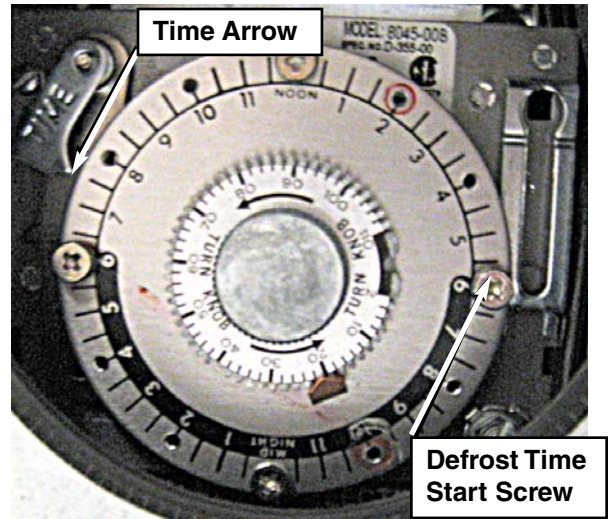

The clock has screws that initiate defrost according to the time of day. The failsafe setting sets the length of defrost from two minutes to 110 minutes.

To ensure a thorough defrost, it may be necessary to increase the failsafe time in high ambient conditions.

**The time arrow must be set to the correct time of day.** Turn the knob until the appropriate time on the wheel lines up with the time arrow.

**SETTING DEFROST TIMES**


Defrost times are factory set for one defrost per day. NAV/C -4 and NAV/C-6 are set for 60 min. defrost duration. NAV/C-8 is set up for 100 min. defrost duration — two times per day.

Additional defrosts may be required for merchandisers located in high humidity or high use areas. Avoid setting defrost during the day, or peak use periods.

**To change the factory-set defrost settings, move the defrost start time screw to correspond to the desired defrost time on the defrost wheel.**

Set the length of time for the defrost (failsafe). Push down on the adjustment and slide it to the length of time.

 **WARNING**  
**Product will be degraded and may spoil if allowed to sit in a non-refrigerated area.**

 **CAUTION**  
When brazing pipes, be sure to use the insulation blanket shipped with the merchandiser to prevent damage to the metal merchandiser bottom.

**TEMPERATURE CONTROL**

Interior cabinet temperatures are controlled through the use of a bulb and capillary type temperature control. The temperature control is located inside the merchandiser, on the right side next to the gravity coil (interior top).



Temperature Control

The differential is pre-set and can not be changed. The indicated dial temperature will not directly correspond to the actual cabinet temperature due to the bulb location and depending on various conditions. A certain amount of time lag will be noticed between the new setting and the resulting temperature.

## START UP / OPERATION

### START UP

Follow the start up procedures as detailed in Section 2 of this manual.

Each self contained merchandiser has its own evaporator coil. NAV/C models have capillary tubes as expansion devices.

- a. Check the interior cabinet thoroughly for loose nuts, bolts and electrical connections.
- b. Inspect the refrigeration lines for visible damage or chafing.
- c. Replace electrical box cover and access panel if previously removed.
- d. Turn on the electrical power, power switch and start the merchandiser. The merchandiser must pull down in temperature.

**Allow merchandiser 24 hours to operate before loading product.**

### CONTROLS AND ADJUSTMENTS

1. The T-stat controller controls refrigeration temperature. This is factory inside the merchandiser.

Defrosts are time initiated and time terminated for self contained and remote. The defrost setting is factory set as shown above (Interior Temperature).

### CONTROLS and ADJUSTMENTS

Refrigeration Controls			Defrost Controls			
Model	Product Application	Interior Air Temperature	Defrost Frequency (per day)	Type of Defrost	Temp. Termination	Failsafe Time (Minutes)
<b>NAV/C-4</b> (Self Contained)	Medium Temp. (Dairy, Deli)	28° - 35° F	1	Off Time	Time	60
<b>NAV/C-6</b> (Self Contained)	Medium Temp. (Dairy, Deli)	28° - 35° F	1	Off Time	Time	60
<b>NAV/C-8</b> (Self Contained)	Medium Temp. (Dairy, Deli)	28° - 35° F	2	Off Time	Time	100

### LOAD LIMITS

Each merchandiser has a load limit decal. Shelf life of perishables will be short if load limit is violated.

**AT NO TIME SHOULD MERCHANDISERS BE STOCKED BEYOND THE LOAD LIMITS INDICATED.**



**AIR OPENINGS MUST REMAIN OPEN AND FREE OF OBSTRUCTION AT ALL TIMES** to provide proper refrigeration and air curtain performance.

Do not allow product, packages, signs, etc. to block these grilles.

Do not use non-approved shelving, baskets, display racks, or any accessory that could hamper air curtain performance.

Do not allow product to be placed outside of the designated loadline in the illustration at left. Air flows through the back wall, over the product on the shelves, across the face of the product (air curtain), and into the return air grille.

### DO NOT BLOCK AIR LOUVERS.

### STOCKING

Product should NOT be placed inside the merchandisers until merchandisers are at proper operating temperature.

**Allow merchandiser 24 hours to operate before loading product.**

Proper rotation of product during stocking is necessary to prevent product loss. Always bring the oldest product to the front and set the newest to the back.



**SHELF MAXIMUM WEIGHT LIMITS**

Husmann merchandiser shelves are designed to support the maximum weight load limits as indicated in the table below.

Exceeding these maximum weight load limits may cause damage to the shelf or shelves, damage to the merchandiser, damage to store products, and potentially create a hazardous condition for customers and staff. Exceeding the indicated maximum weight load limits constitutes misuse as described in the Husmann Limited Warranty.

NAV/C models have two standard shelves. The top shelves are 13 inches wide and the bottom shelves are 16 inches wide.

**Maximum Shelf Weight Limits**

	<sup>1</sup> Flat	17° Tilt
Bottom Wire Racks	250 lb (113.4 kg)	N/A
Standard 16 in. (406 mm) Shelf	250 lb (113.4 kg)	250 lb (113.4 kg)
Standard 13 in. Shelf (330 mm)	125 lb (56.7 kg)	N/A

<sup>1</sup> Shelf load limits at 0° tilt

**PENCIL THERMOMETER**

NAV/C models have pencil thermometers. The thermometer is located at the top, front center of the merchandiser's cabinet interior (seen through front glass).

Temperature is displayed in Fahrenheit and Celsius degrees as a standard option. The thermometer may be replaced if it becomes damaged.



**Pencil Thermometer**

## MAINTENANCE

### CARE AND CLEANING

Long life and satisfactory performance of any equipment is dependent upon the care it receives. To ensure long life, proper sanitation and minimum maintenance costs, these merchandisers should be thoroughly cleaned, all debris removed and the interiors washed down, weekly.

#### Exterior Surfaces

The exterior surfaces must be cleaned with a mild detergent and warm water to protect and maintain their attractive finish. **NEVER USE ABRASIVE CLEANSERS OR SCOURING PADS.**

#### Interior Surfaces

The interior surfaces may be cleaned with most domestic detergents, ammonia based cleaners and sanitizing solutions with no harm to the surface. Self contained models empty into a limited capacity evaporation pan, which will overflow if excess water is used in cleaning.

### *Do NOT Use:*

- Abrasive cleansers and scouring pads, as these will mar the finish.
- Coarse paper towels on coated glass.
- Ammonia-based cleaners on acrylic parts.
- Solvent, oil or acidic based cleaners on any interior surfaces.
- Do not use high pressure water hoses.



### WARNING

Product will be degraded and may spoil if allowed to sit in a non-refrigerated area.

### *Do:*

- Disconnect electrical power before cleaning.**
- Remove the product and all loose debris to avoid clogging the waste outlet.
- Store product in a refrigerated area such as a cooler. Remove only as much product as can be taken to the cooler in a timely manner.
- Thoroughly clean all surfaces with soap and hot water. **DO NOT USE STEAM OR HIGH WATER PRESSURE HOSES TO WASH THE INTERIOR. THESE WILL DESTROY THE MERCHANDISERS' SEALING CAUSING LEAKS AND POOR PERFORMANCE.**



### WARNING

**Do NOT allow cleaning agent or cloth to contact food product.**

- Do NOT flood merchandiser with water. **NEVER INTRODUCE WATER FASTER THAN THE WASTE OUTLET CAN REMOVE IT.**

NAVIC merchandisers have a bottom drain. The bottom drain is accessible from the rear of the merchandiser. Connect the drain to a waste line or drain the water in a bucket during cleaning.

- Allow merchandisers to dry before resuming operation.
- After cleaning is completed, turn on power to the merchandiser.

## CLEANING STAINLESS STEEL SURFACES

Use non-abrasive cleaning materials, and always polish with grain of the steel. Use warm water or add a mild detergent to the water and apply with a cloth. Always wipe rails dry after wetting.

Use alkaline chlorinated or non-chlorine containing cleaners such as window cleaners and mild detergents. Do not use cleaners containing salts as this may cause pitting and rusting of the stainless steel finish. Do not use bleach.

**CAUTION****DO NOT FLOOD!**

**Use only enough water necessary to clean surface. Water must not drip down the case!**

**Never use ammonia based cleansers, abrasive cleansers, or scouring pads.**

**WARNING**

**Do NOT use HOT water on Cold glass Surfaces. This can cause the glass to shatter and could result in personal injury. Allow glass fronts, to warm before applying hot water.**

## CLEANING PENCIL THERMOMETER

NAV/C models have pencil thermometers. The thermometer is located at the top, front center of the merchandiser's cabinet interior.

To clean the thermometer:

1. Remove the two screws securing the thermometer to its mounting bracket.
2. Remove the plastic ends from the thermometer. Then, slide out the glass tube.
2. Use non-abrasive cleaning materials and a mild detergent to clean glass tube and thermometer cover.
3. Replace thermometer.



**Pencil Thermometer**

**WARNING**

**— LOCK OUT / TAG OUT —**

***To avoid serious injury or death from electrical shock, always disconnect the electrical power at the main disconnect when servicing or replacing any electrical component. This includes, but is not limited to, such items as doors, lights, fans, heaters, and thermostats.***

### CLEANING THE BOTTOM DECK

Remove the bottom wire racks and painted metal bottom racks. Clean the interior surfaces as described on page 4-1. The merchandiser has a 1-inch floor drain that directs the water outside of the merchandiser.

Use a bucket or connect the drain to a hose to remove excess water. After cleaning the inside of the merchandiser, replace the drain caps in order to avoid air leaks and water dripping on the floor.



**Drain Cap**



**WARNING**


**SHUT FANS OFF DURING CLEANING PROCESS.**

### CLEANING COILS


Condenser coils should be cleaned at least once per month. Additional cleaning may be needed depending on the operational environment. A dirty condenser blocks normal airflow through the coils.

Airflow blockage increases energy consumption and reduces the merchandiser's ability to maintain operating temperature.

**Unplug merchandiser before servicing. Always wear gloves and protective eye wear when cleaning evaporation pan.**

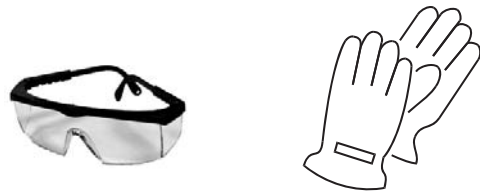

To clean the coils, use a vacuum cleaner with a wand attachment and a soft (non-metallic) brush to remove dirt and debris. Do not bend coil fins. Always wear gloves and protective eye wear when cleaning near sharp coil fins and dust particles.

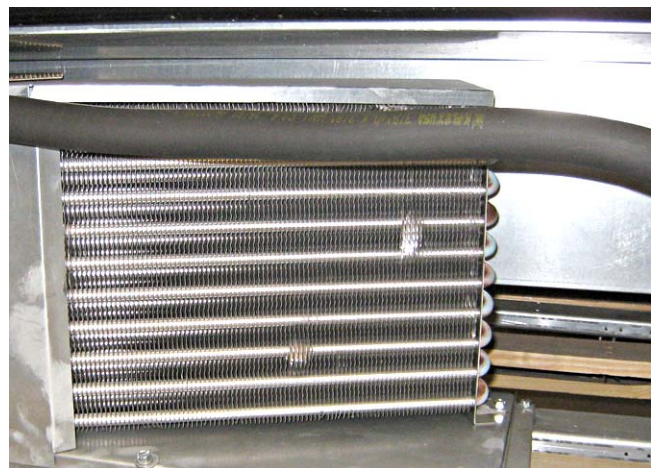

**Condenser Coils**

## CLEANING EVAPORATION PAN

The condensate water outlet for self contained models empties into a limited capacity evaporation pan.

Debris or dirt accumulation inside the condensate evaporation pan or on the heater coil will reduce the pan's evaporation capacity and cause premature heater failure. The evaporation pan waste water will overflow and spill onto the floor if the pan capacity is reduced.

**Unplug merchandiser before servicing. Always wear gloves and protective eye wear when cleaning evaporation pan.**



Remove accumulated debris from the evaporation pan. Be sure to remove any dirt, debris or liquids from the pan.

## CAUTION

**Evaporation Pan is Hot!**  
and poses risk of bodily injury – Always Wear gloves and protective eye wear when servicing. Turn off evaporation pan heater, and allow pan to cool.

## REMOVING SCRATCHES FROM BUMPER

Most scratches and dings can be removed using the following procedure.

1. Use steel wool to smooth out the surface area of the bumper.
2. Clean area.
3. Apply vinyl or car wax and polish surface for a smooth glossy finish.



### PRECAUTION CLEANING PRECAUTIONS


When Cleaning:

- Do not use high pressure water hoses
- Do not introduce water faster than waste outlet can drain
- NEVER INTRODUCE WATER ON SELF CONTAINED UNIT WITH AN EVAPORATION PAN
- NEVER USE A CLEANING OR SANITIZING SOLUTION THAT HAS OIL BASE (these will dissolve the butyl sealants) or an AMMONIA BASE (this will corrode the copper components of the merchandiser)
- TO PRESERVE THE ATTRACTIVE FINISH:
- Use a water and a mild detergent for the exterior only
- Do NOT use a chlorinated cleaner on any surface
- Do NOT use abrasives or steel wool scouring pads (these will mar the finish)

## SERVICE

### REPLACING FLUORESCENT LAMPS

Remove the plastic shield to replace fluorescent lamps. The switch on the back side of the merchandiser controls the lights.

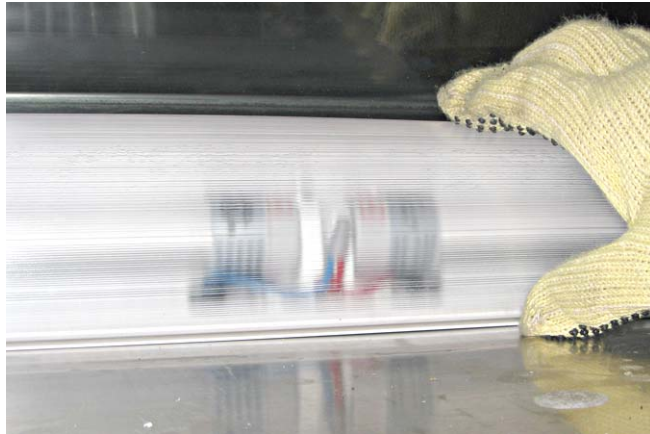

**Display Lamps.**



## WARNING

**— LOCK OUT / TAG OUT —**

*To avoid serious injury or death from electrical shock, always disconnect the electrical power at the main disconnect when servicing or replacing any electrical component. This includes, but is not limited to, such items as doors, lights, fans, heaters, and thermostats.*



## WARNING

**Product will be degraded and may spoil if allowed to sit in a non-refrigerated area.**

### TROUBLESHOOTING GUIDE

PROBLEM	PROBABLE CAUSE	SOLUTION
Compressor will not start (no noise)	<ol style="list-style-type: none"> <li>1. Power disconnected</li> <li>2. Blown fuse or breaker</li> <li>3. Defective or broken wiring</li> <li>4. Defective overload</li> <li>5. Defective temperature control</li> </ol>	<ol style="list-style-type: none"> <li>1. Check service cord or wiring connection</li> <li>2. Replace fuse or reset breaker</li> <li>3. Repair or replace</li> <li>4. Replace</li> <li>5. Replace</li> </ol>
Compressor will not start; cuts out on overload	<ol style="list-style-type: none"> <li>1. Low voltage</li> <li>2. Defective compressor</li> <li>3. Defective relay</li> <li>4. Restriction (pinched cap tube)</li> <li>5. Restriction (moisture)</li> <li>6. Condenser blocked with dust and dirt</li> <li>7. Defective condenser fan motor</li> </ol>	<ol style="list-style-type: none"> <li>1. Cabinet voltage must not be more than 5% below rating</li> <li>2. Replace</li> <li>3. Replace</li> <li>4. Repair or replace</li> <li>5. Leak check, replace drier evacuate and recharge</li> <li>6. Clean condenser</li> <li>7. Replace</li> </ol>

PROBLEM	PROBABLE CAUSE	SOLUTION
Warm storage temperature	<ol style="list-style-type: none"> <li>1. Temperature control not set properly</li> <li>2. Short or refrigerant</li> <li>3. Cabinet location too warm</li> <li>4. Refrigerant over-charge</li> <li>5. Low voltage, compressor cycling on overload</li> </ol>	<ol style="list-style-type: none"> <li>1. Reset control</li> <li>2. Leak check, replace drier evacuate and recharge</li> <li>3. Move to cooler location or correct excessive heat source</li> <li>4. Purge system, evacuate and recharge</li> <li>5. Compressor voltage must not be more than 5% below rating</li> </ol>
Compressor runs continuously; product too warm	<ol style="list-style-type: none"> <li>1. Short of refrigerant</li> <li>2. Warm ambient temperature</li> <li>3. Product past loadline</li> </ol>	<ol style="list-style-type: none"> <li>1. Leak check, replace drier, evacuate and recharge</li> <li>2. Decrease ambient temperature</li> <li>3. Product past load line</li> </ol>
Compressor runs continuously; product too cold	<ol style="list-style-type: none"> <li>1. Defective control</li> <li>2. Control sensing element not in positive contact</li> <li>3. Short on refrigerant</li> </ol>	<ol style="list-style-type: none"> <li>1. Replace</li> <li>2. Assure proper contact</li> <li>3. Leak check, replace drier evacuate and recharge</li> </ol>

#### TROUBLESHOOTING LIGHT GUIDE

PROBLEM	SOLUTION
Lights won't start	<ol style="list-style-type: none"> <li>1. Check light switch</li> <li>2. Check continuity to ballast</li> <li>3. Check to see if bulbs are inserted properly in sockets</li> <li>4. Check voltage</li> </ol>
Lights flicker	<ol style="list-style-type: none"> <li>1. Allow lamps to warm up</li> <li>2. Check lamp sleeve for cracks</li> <li>3. Check sockets for moisture and proper contact</li> <li>4. Bulb replacement may be necessary</li> <li>5. Check voltage</li> <li>6. New bulbs tend to flicker until used</li> </ol>



**NAV/C-4, NAV/C-6, NAV/C-8**


<b>Item Part #</b>	<b>Description</b>	<b>Item Part #</b>	<b>Description</b>
<b>THERMOSTATS, POWER CORDS, AND CONTROLS</b>		<b>REFRIGERATION</b>	
		<b>NAV/C-4</b>	
CT.4481666	Refrigeration Thermostat NAV/C-4 and NAV/C-6	CU.4200549	Compressor
CT.4481667	Refrigeration Thermostat NAV/C-8	CO.4671540	Condenser
EP.4441820	Power Cord - 15 Amp, 115V NAV/C-4 and NAV/C-6	MO.4410685	Condenser Fan Motor
EP.4441821	Power Cord - 20 Amp, 115V NAV/C-8	FB.4780859	Condenser Fan Blade
SW.4440823	Light Switch - all models	EV.4671541	Evaporator
TC.4440782	Defrost Timer - NAV/C 4, 6	RC.4671284	Capillary Tube Assembly
TC.4483089	Defrost Timer - NAV/C 8	FI.4613274	Filter Drier
		<hr/>	
		<b>NAV/C-6</b>	
EP.4440594	Receptacle GFCI - all models	CU.4200549	Compressor
GL.4996570	Front Glass Pack - NAV/C 4	CO.4671535	Condenser
GL.4996571	Front Glass Pack - NAV/C 6	MO.4410685	Condenser Fan Motor
GL.4996572	Front Glass Pack - NAV/C 8	FB.4780859	Condenser Fan Blade
		CO.4671531	Evaporator
		RC.4671284	Capillary Tube Assembly
		FI.4613274	Filter Drier

**A-2            APPENDIX A — TECHNICAL DATA**


<b>Item Part #</b>	<b>Description</b>	<b>Item Part #</b>	<b>Description</b>
<b>REFRIGERATION</b>		<b>DOORS</b>	
<b>NAV/C-8</b>		<b>NAV/C-4</b>	
CU.4200186	Compressor	DO.4961264	Interior
CO.4671536	Condenser	DO.4961265	Exterior
MO.4410685	Condenser Fan Motor	<hr/>	
FB.4780859	Condenser Fan Blade	<b>NAV/C-6</b>	
CO.4671532	Evaporator	DO.4961264	Interior
RC.4671284	Capillary Tube Assembly	DO.4961266	Exterior
FI.4613274	Filter Drier	<hr/>	
<b>LIGHTING (ALL MODELS)</b>		<b>NAV/C-8</b>	
BA.4481505	Ballasts	DO.4961264	Interior
		DO.4961265	Exterior
 <b>THERMOMETER (ALL MODELS)</b>			
TM.4914521	Thermometer		

**NAV/C-4 — Plan View**

Dimensions shown as inches and (mm).

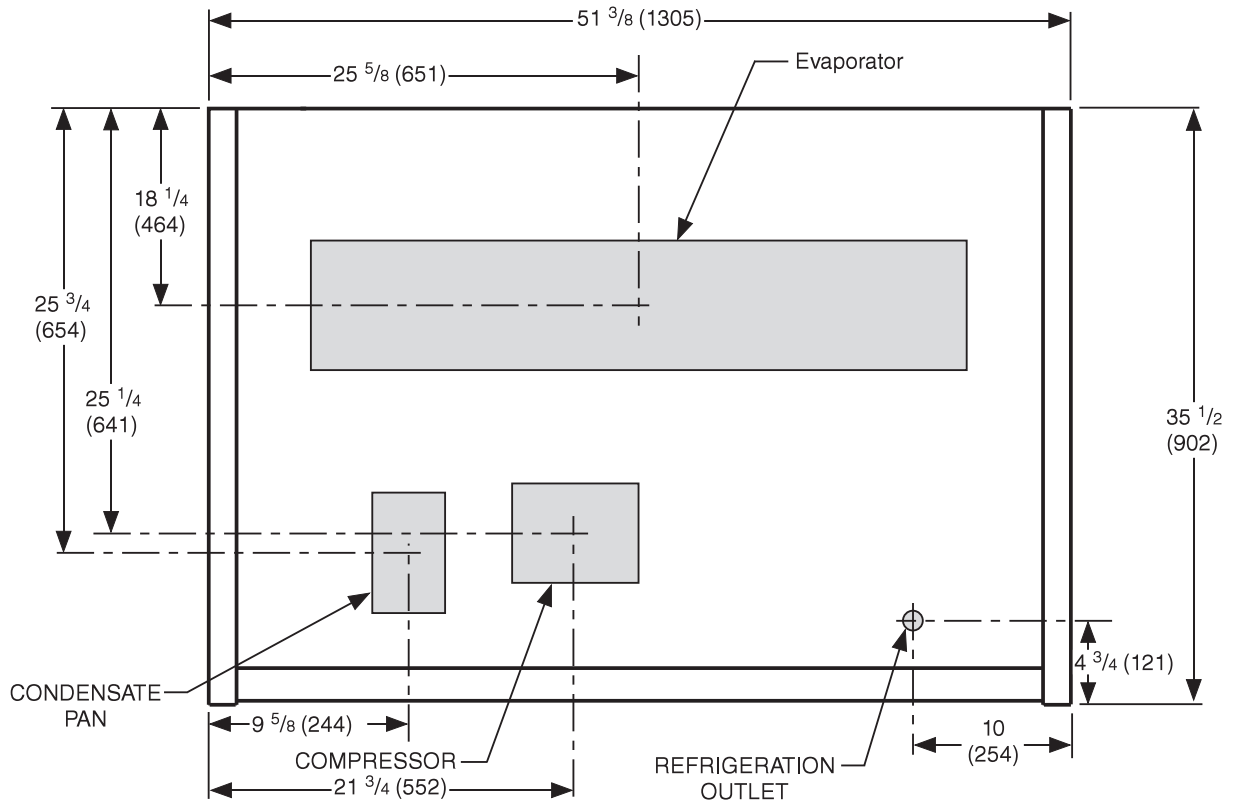


**NAV/C-6 — Plan View**

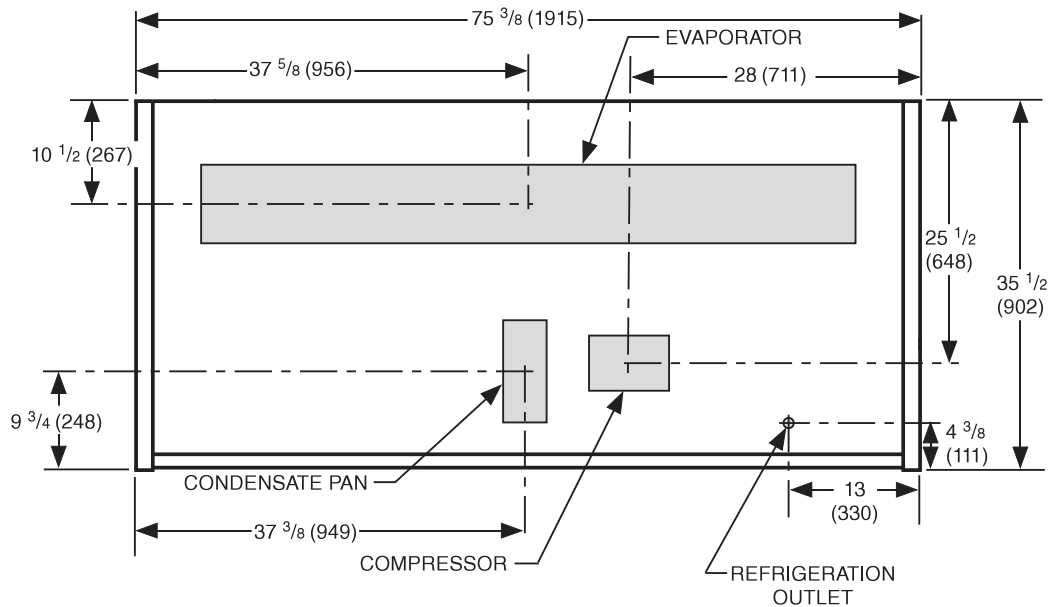


NAV/C-8 — Plan View

Dimensions shown as inches and (mm).

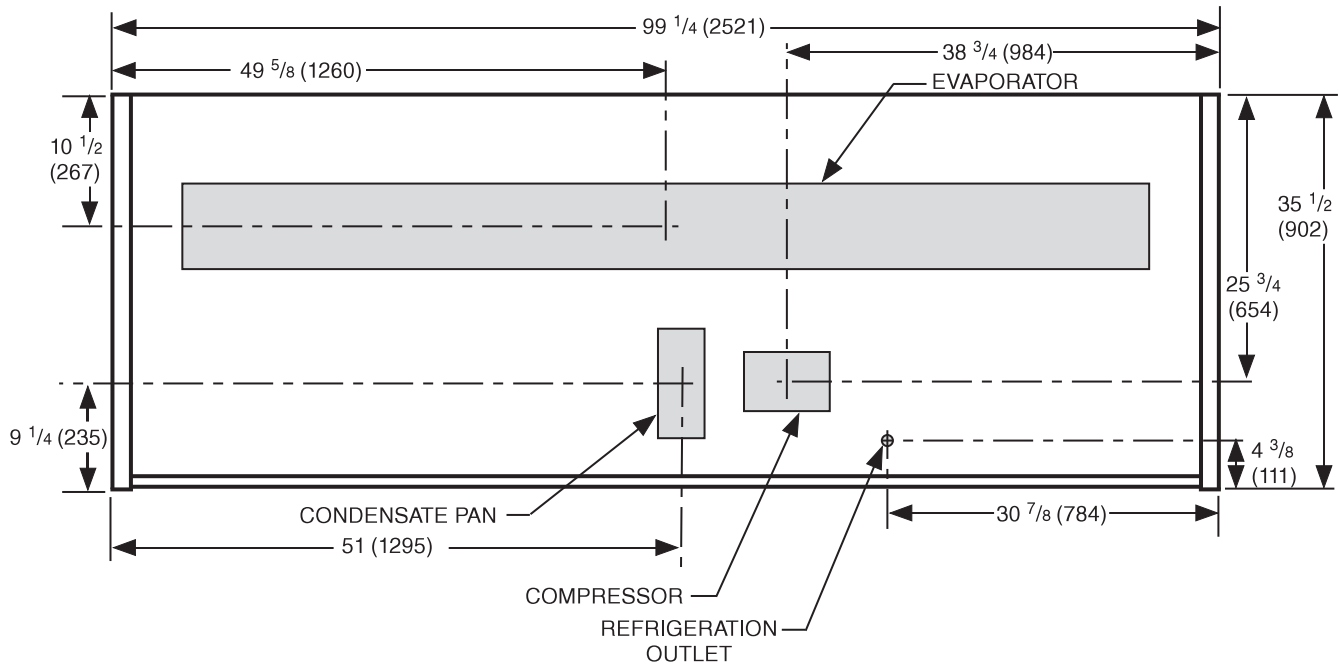

Dimensions shown as inches and (mm).

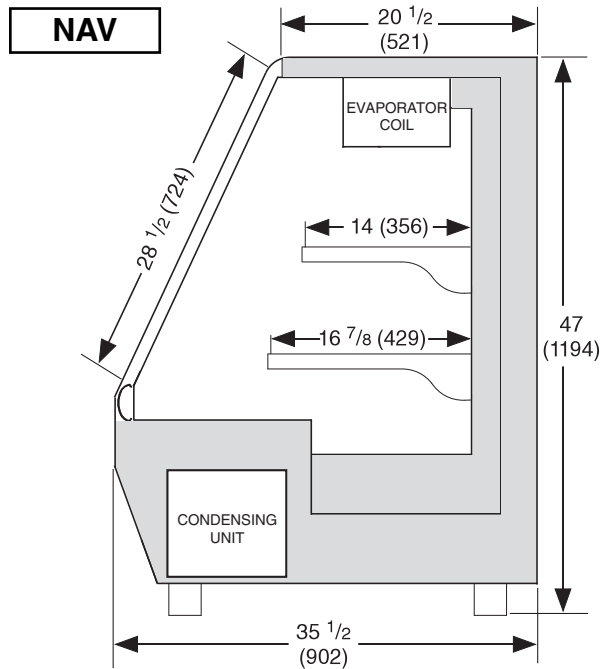

REFRIGERATION DATA

NAV/C

Thermostat Setting CI/CO (°F)

Position # 5 28 / 35


Compressor (hp)

NAV/C-4 1/3 hp  
 NAV/C-6 1/3 hp  
 NAV/C-8 1/2 hp

Condensing Unit

Capacity

NAV/C-4 2829  
 NAV/C-6 2829  
 NAV/C-8 3764  
 (@ 10° F evap. and 110° F cond. temperature)

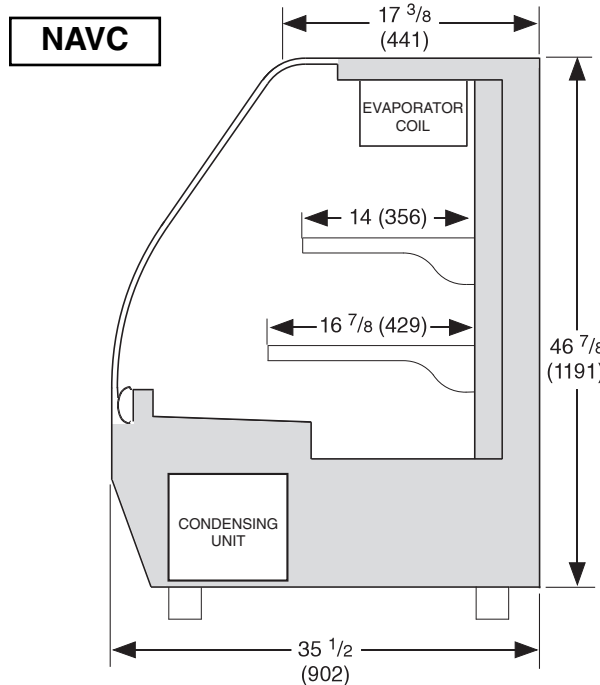

DEFROST DATA

Frequency (hr)

NAV/C-4/6 24  
 NAV/C-8 12

OFFTIME

Failsafe (minutes)

NAV/C-4 60  
 NAV/C-6 100

Defrost Termination

Time Terminated

PHYSICAL DATA

Refrigerant Charge

14.5 oz 0.411 kg  
 20 oz 0.567 kg  
 23 oz 0.653 kg

**Note:** This data is based on store temperature and humidity that does not exceed 80°F and 55% R.H. unless otherwise stated. Schedule defrost at night while lights are off.

**Electrical Data**

*Note: These are rated values for individual components and should not be added together to determine total merchandiser electrical load.*

**Lamps**

	<b>Provided Lamps</b>	<b>Watts</b>	<b>Total Watts</b>
NAV/C-4	2	39	78
NAV/C-6	4	55	220
NAV/C-8	4	72	288

**Condensing Unit (115V, 1Ph, 60Hz) Standard**

<b>NAV/C-4/6</b>	
Compressor LRA	40
Compressor RLA	5.9
<b>NAV/C-8</b>	
Compressor LRA	68
Compressor RLA	6.8

**Product Data****NAV/C-4**

*Refrigerator interior volume (Cu Ft/Case)* 22.78 ft<sup>3</sup> /case (654.34 liters /case)

**NAV/C-6**

*Refrigerator interior volume (Cu Ft/Case)* 37.30 ft<sup>3</sup> /case (1056.22 liters /case)

**NAV/C-8**

*Refrigerator interior volume (Cu Ft/Case)* 50.22 ft<sup>3</sup> /case (1422.07 liters /case)


Model Number	Exterior Dimensions (in inches)			Stainless Steel Exterior Top	Number of Rear Doors	Nominal HP	Refrigeration Type
	L	D	H*				
<b>NAV/C-4</b>	51 <sup>5</sup> / <sub>16</sub>	35 <sup>1</sup> / <sub>2</sub>	45 <sup>5</sup> / <sub>8</sub>	NAV - 20 <sup>5</sup> / <sub>16</sub> NAVC - 17 <sup>7</sup> / <sub>8</sub>	2	<sup>1</sup> / <sub>3</sub>	R134a
<b>NAV/C-6</b>	75 <sup>5</sup> / <sub>16</sub>	35 <sup>1</sup> / <sub>2</sub>	45 <sup>5</sup> / <sub>8</sub>	NAV - 20 <sup>5</sup> / <sub>16</sub> NAVC - 17 <sup>7</sup> / <sub>8</sub>	3	<sup>1</sup> / <sub>3</sub>	R134a
<b>NAV/C-8</b>	99 <sup>5</sup> / <sub>16</sub>	35 <sup>1</sup> / <sub>2</sub>	45 <sup>5</sup> / <sub>8</sub>	NAV - 20 <sup>5</sup> / <sub>16</sub> NAVC - 17 <sup>7</sup> / <sub>8</sub>	4	<sup>1</sup> / <sub>2</sub>	R134a

\* Height includes leveling pods

Model Number	Electrical			Fuse Amps	Hz/Ph	Approx. Ship Wt. (lb)	AC Load (BTU/h)	Energy Consumption (kWh/day)
	Volts	Run Amps	Nema Plug					
<b>NAV/C-4</b>	115	9.2	5-15P	15	60/1	505	4280	8.20
<b>NAV/C-6</b>	115	12.8	5-15P	15	60/1	700	4280	11.18
<b>NAV/C-8</b>	115	15.3	5-20P	20	60/1	890	5690	13.40

ELECTRICAL SPECIFICATIONS	
MODEL:	NAV/C4, NAV/C6
VOLTAGE:	115V
FREQUENCY:	60HZ
COMPRESSOR:	1/3 HP

**WARNING**  
BEFORE MAKING ANY REPAIRS, UNPLUG THE UNIT TO AVOID DAMAGING IT.

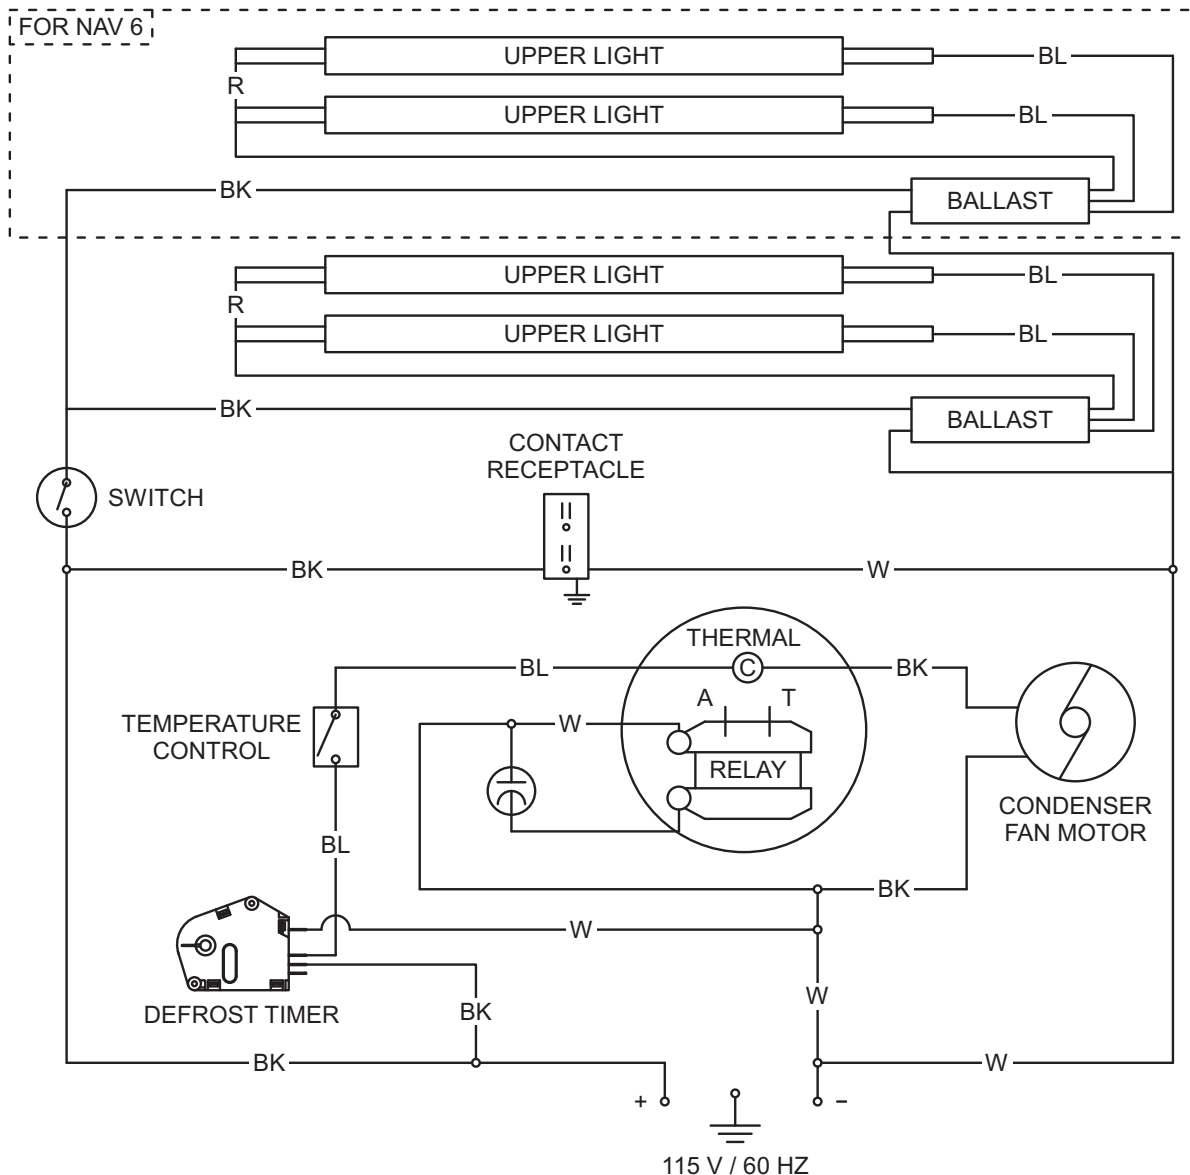

**WARNING**

All components must have mechanical ground, and the merchandiser must be grounded.

CIRCLED NUMBERS = PARTS LIST ITEM NUMBERS


R = Red Y = Yellow G = Green BL = Blue BK = Black W = White

● = 120V POWER ○ = 120V NEUTRAL ⊥ = FIELD GROUND ≡ = CASE GROUND



ELECTRICAL SPECIFICATIONS	
MODEL:	NAV/C8
VOLTAGE:	115V
FREQUENCY:	60HZ
COMPRESSOR:	1/3 HP

**WARNING**  
BEFORE MAKING ANY REPAIRS, UNPLUG THE UNIT TO AVOID DAMAGING IT.

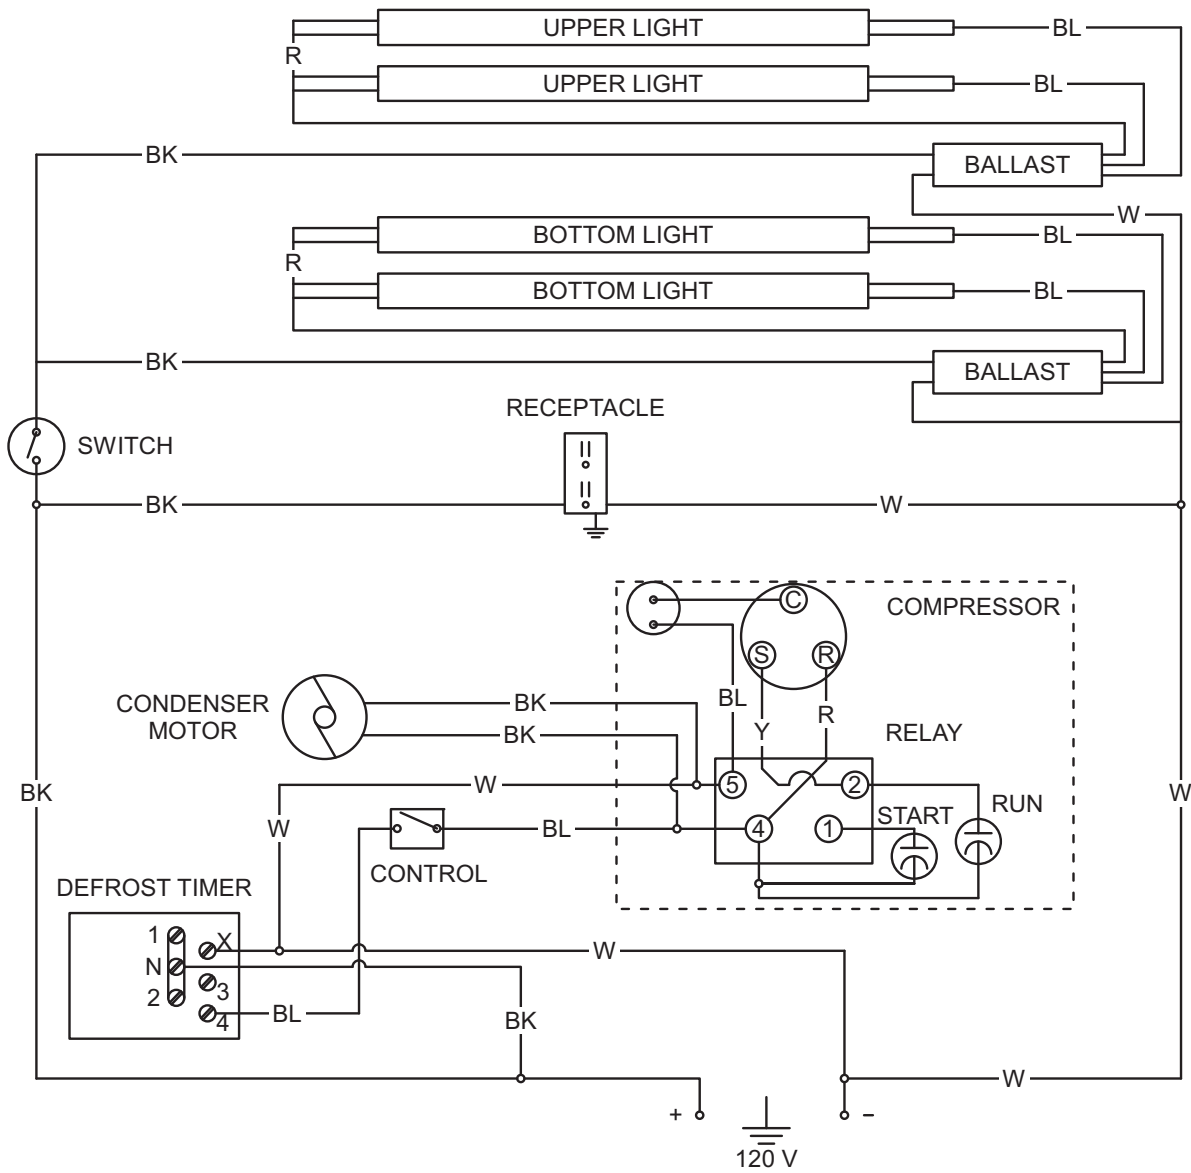

**WARNING**

All components must have mechanical ground, and the merchandiser must be grounded.

CIRCLED NUMBERS = PARTS LIST ITEM NUMBERS

R = Red Y = Yellow G = Green BL = Blue BK = Black W = White

● = 120V POWER ○ = 120V NEUTRAL ⊥ = FIELD GROUND  $\overline{m}$  = CASE GROUND



A decorative border in blue, consisting of a repeating geometric pattern of interlocking squares and lines, framing the entire page.

# **HUSSMANN®**

To obtain warranty information  
or other support, contact your  
Husmann representative.  
Please include the model and  
serial number of the product.

**Husmann Corporation**

12999 St. Charles Rock Road  
Bridgeton, MO 63044-2483  
[www.husmann.com](http://www.husmann.com)