

MINIMUM CLEARANCE REQUIREMENTS:


ACTUAL CLEARANCE REQUIREMENTS ARE DEPENDENT UPON AUTHORITY HAVING JURISDICTION, AND MAY EXCEED DIMENSIONS SHOWN.

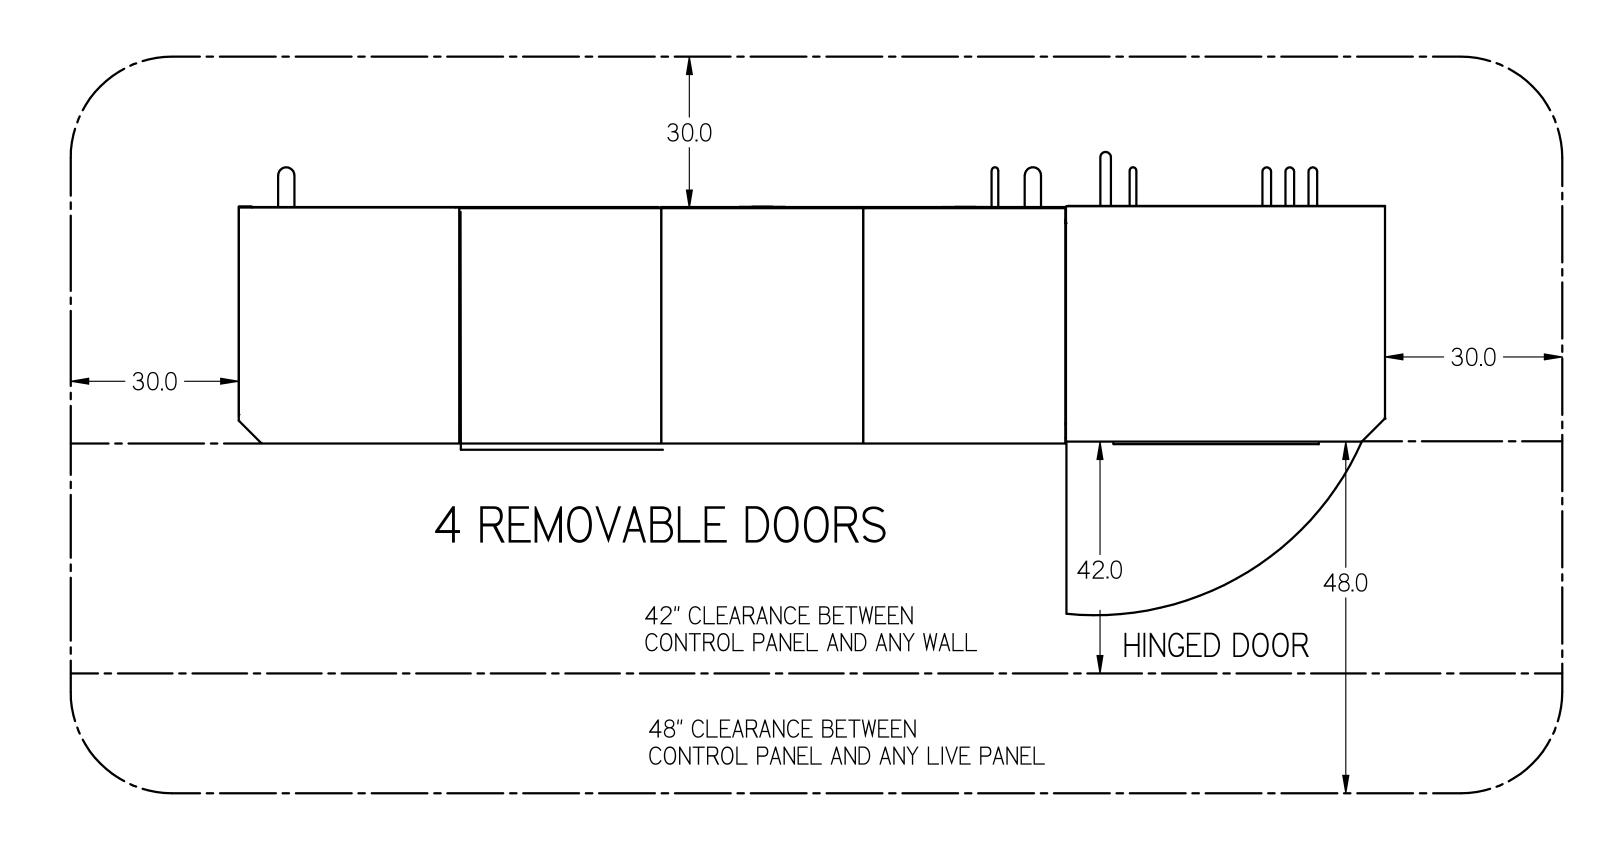


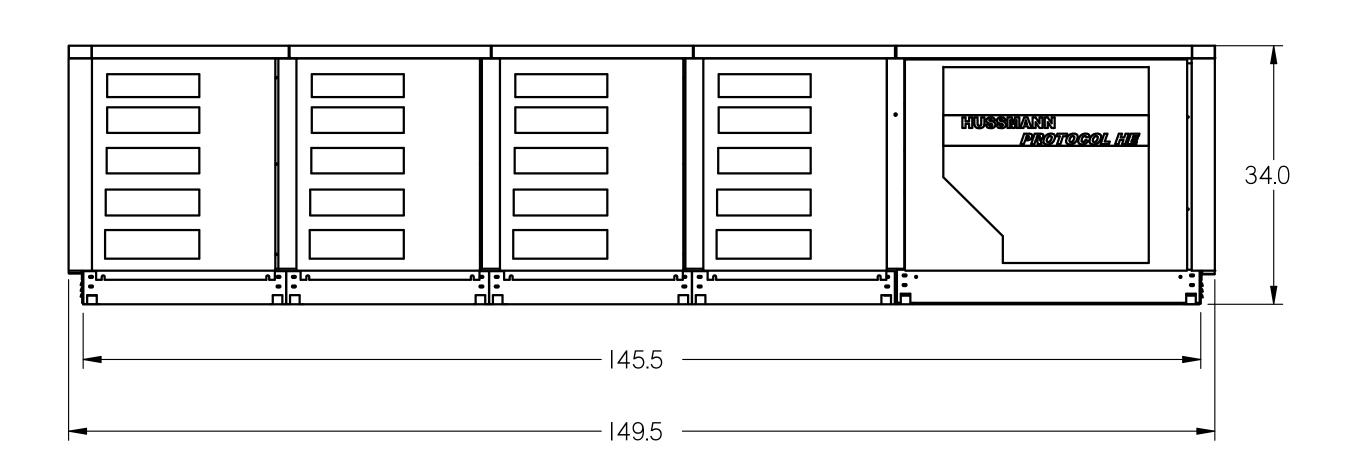



NOTES:

- I. IT IS THE RESPONSIBILITY OF THE INSTALLING CONTRACTOR TO ENSURE THAT THE FINAL EQUIPMENT INSTALLATION MEETS ALL APPLICABLE CODE REQUIREMENTS.
- 2. ILLUSTRATION SHOWN IS FOR GENERAL REPRESENTATION ONLY. ACTUAL PRODUCT WILL VARY DEPENDENT UPON APPLICATION.
- 3. OVERALL DIMENSIONS: 149.5 L X 38.0. W X 34.0 H.
- 4. APPROXIMATE WEIGHT OF THE UNIT W/O RECEIVER = 2250 LBS
- 5. APPROXIMATE WEIGHT OF THE UNIT WITH RECEIVER =2550 LBS

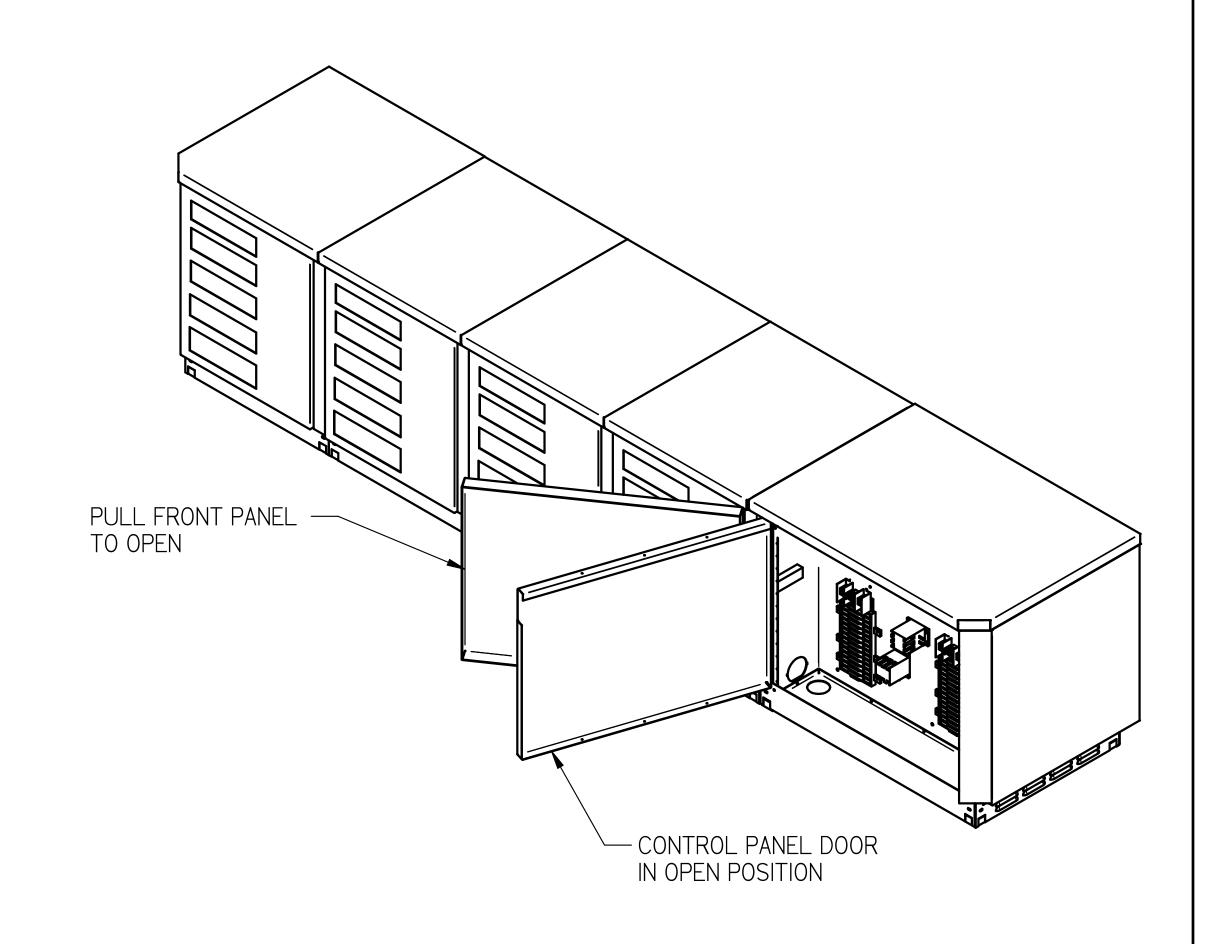

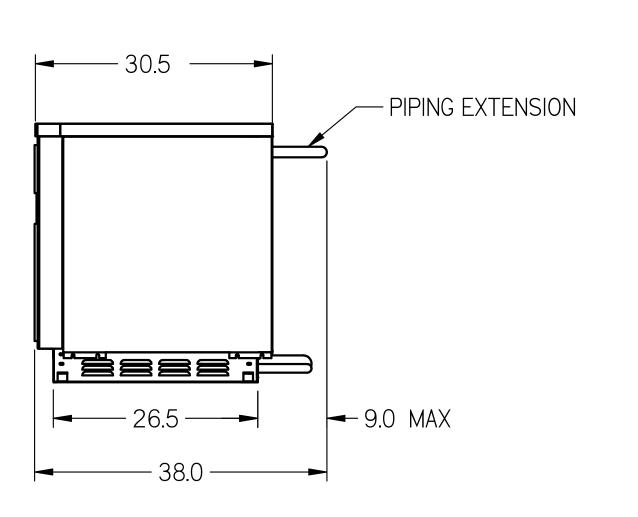

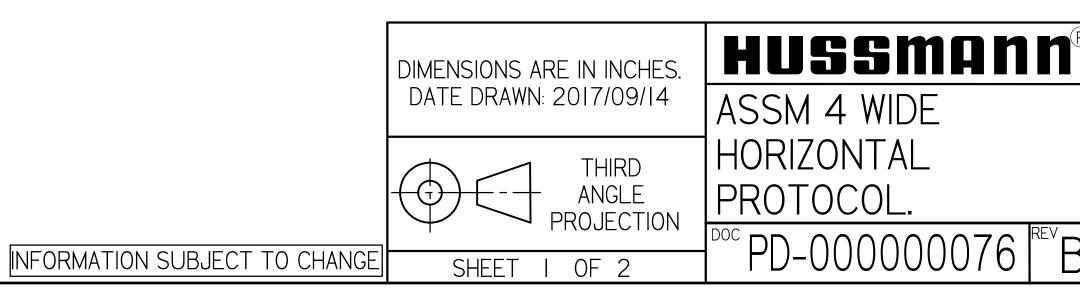

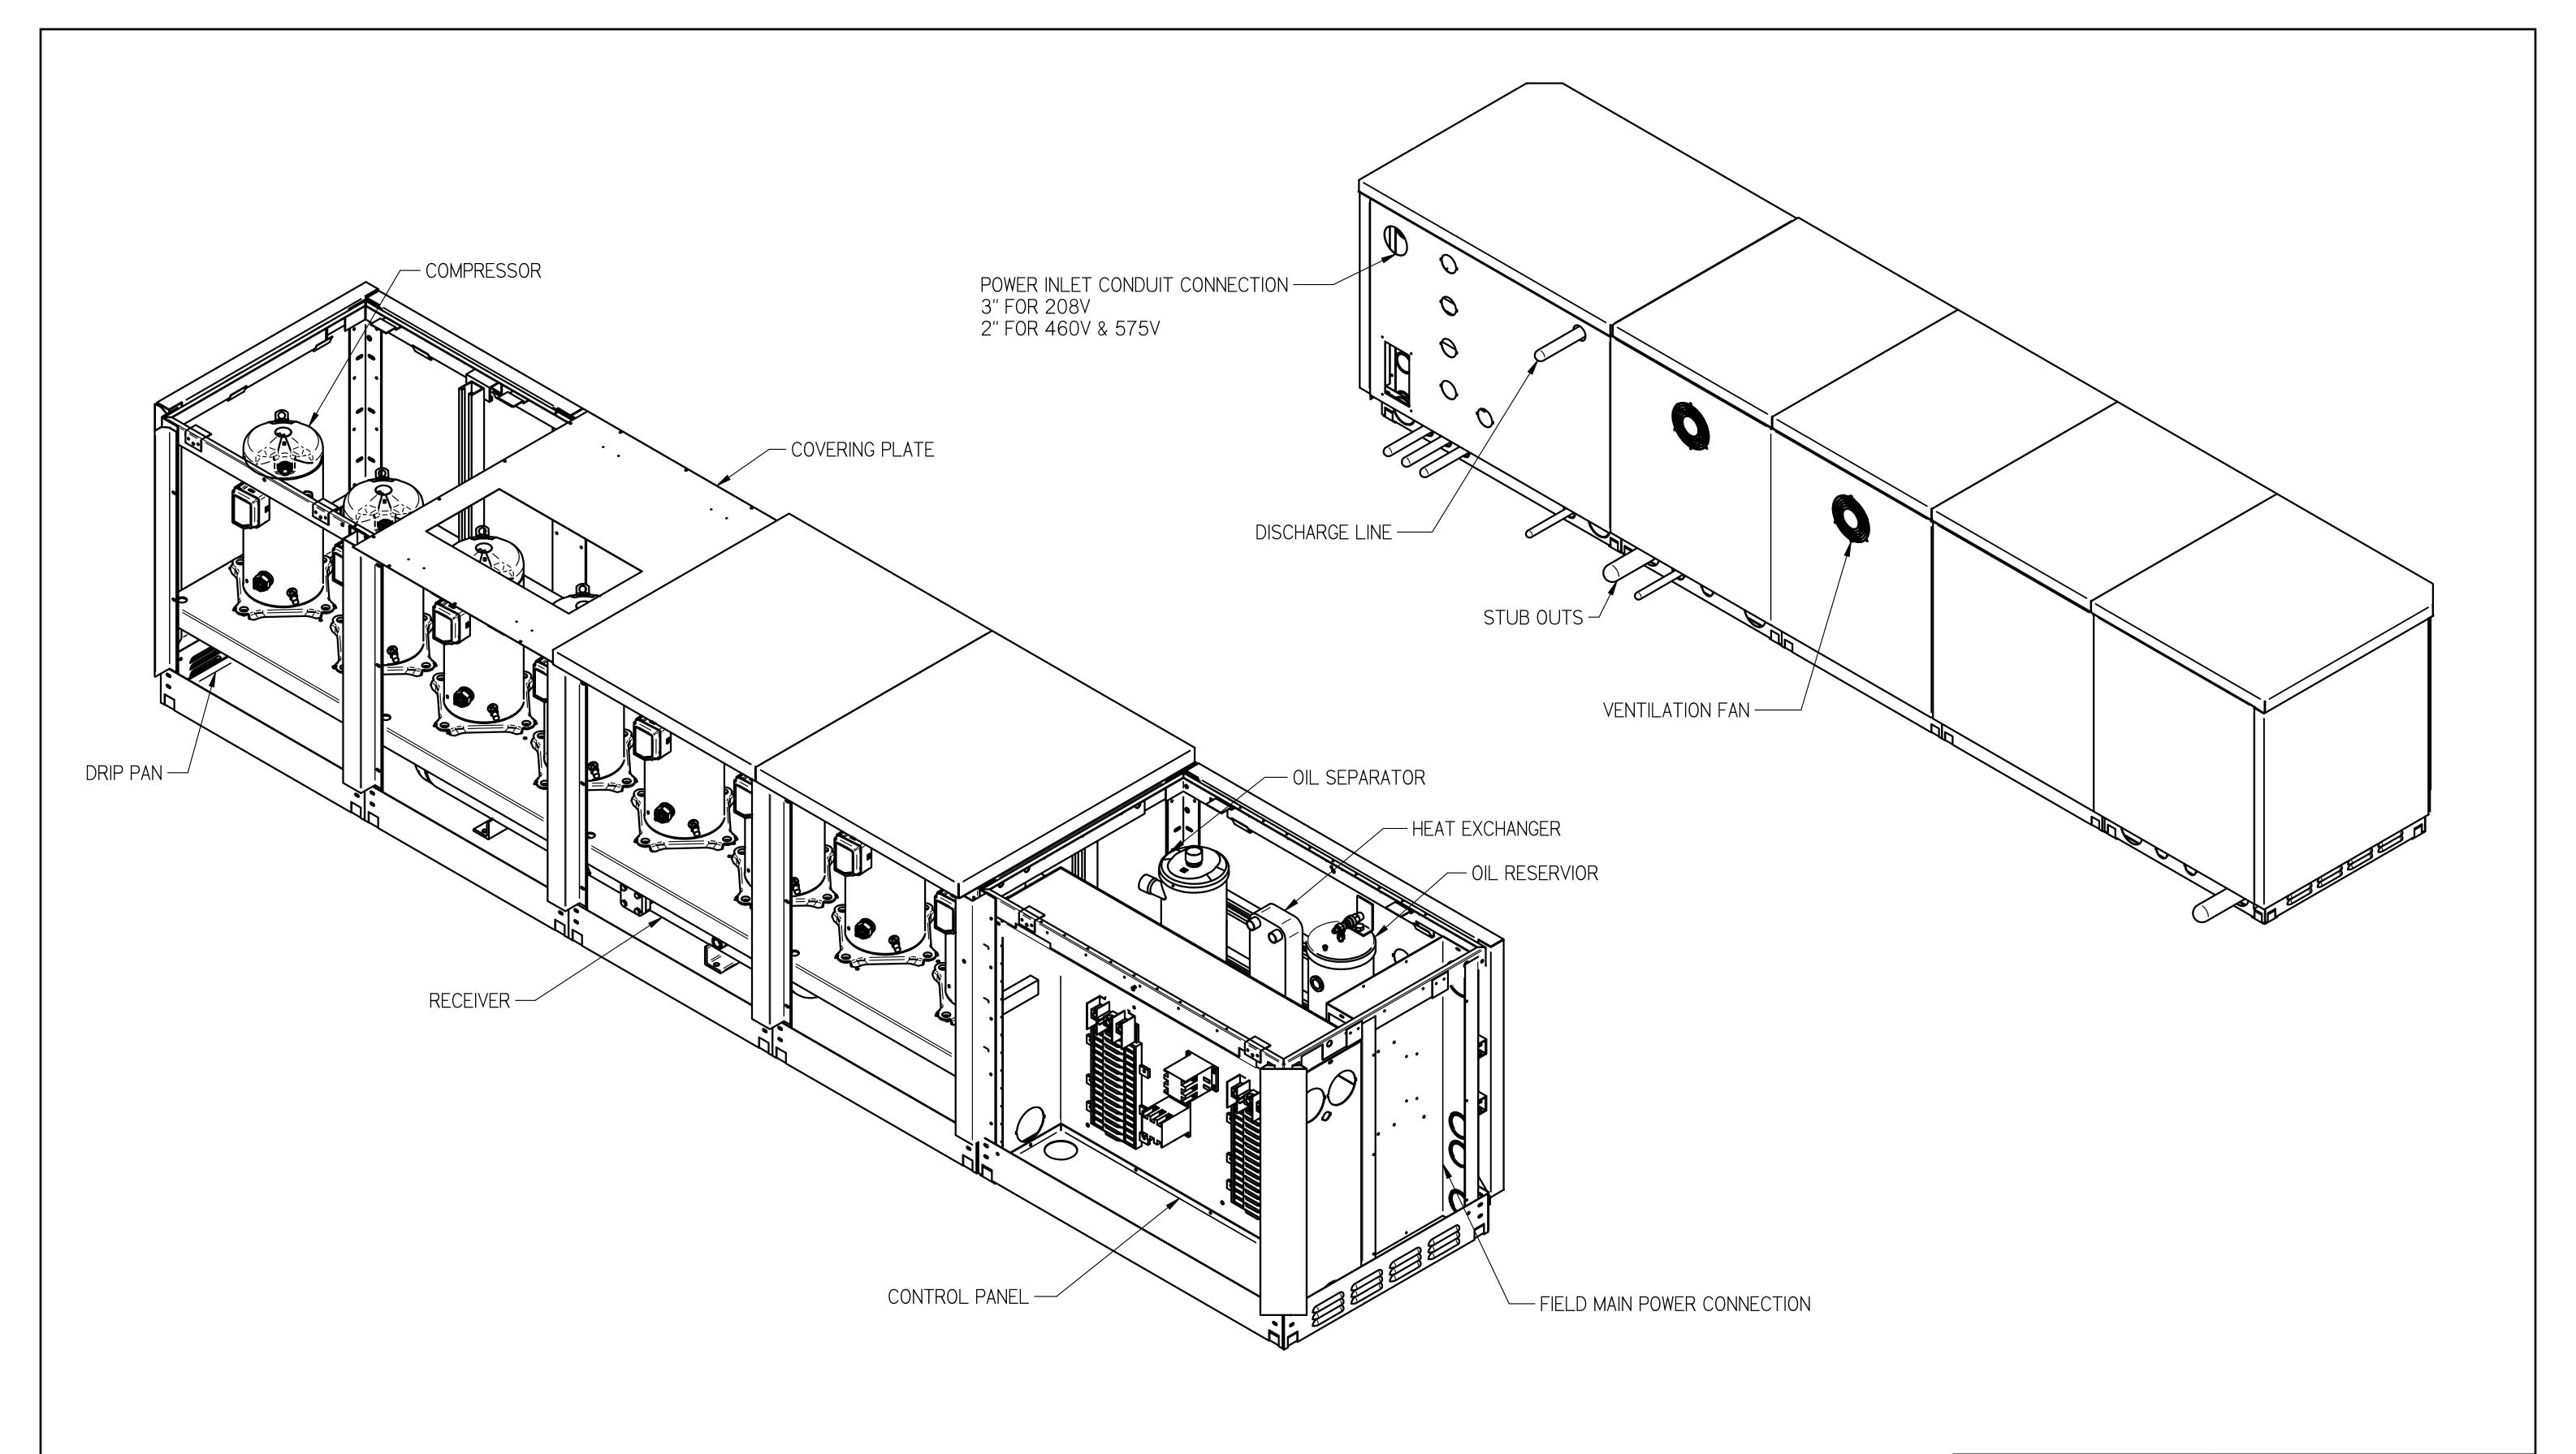

NOTES:

- I. IT IS THE RESPONSIBILITY OF THE INSTALLING CONTRACTOR TO ENSURE THAT THE FINAL EQUIPMENT INSTALLATION MEETS ALL APPLICABLE CODE REQUIREMENTS.
- 2. ILLUSTRATION SHOWN IS FOR GENERAL REPRESENTATION ONLY. ACTUAL PRODUCT WILL VARY DEPENDENT UPON APPLICATION.
- 3. OVERALL DIMENSIONS: 149.5 L X 38.0. W X 34.0 H.
- 4. APPROXIMATE WEIGHT OF THE UNIT W/O RECEIVER = 2250 LBS
- 5. APPROXIMATE WEIGHT OF THE UNIT WITH RECEIVER =2550 LBS





INFORMATION SUBJECT TO CHANGE

ASSM 4 WIDE

THIRD
ANGLE
PROTOCOL.

SHEET 2 OF 2

PD-00000076 REV B

HUSSMANN