






REVISION HISTORY						
REV	ECN	DATE	REVISION DESCRIPTION	REV BY	CHKD BY	APPR BY
A	-	2023/02/27	PRELIMINARY	VBS	AMS	VAV

CDRH - DIMENSIONAL DETAILS-MX CONDENSERS


TYPE	COND MODEL	COND WEIGHT (LBS)	BASE FRAME DIMENSIONS (in) (CURB)		OVERALL DIMENSIONS (in)			DOOR OPEN DIMENSIONS (in)		COND DIMENSIONS (in)			OVERALL WEIGHT INCL COND(LBS)
			<i>L</i>	<i>W</i>	<i>L1</i>	<i>W1</i>	<i>H1</i>	<i>L2</i>	<i>W2</i>	<i>L3</i>	<i>W3</i>	<i>H3</i>	
CDRH 2X1	MXF-02	560	181	95	194	102	84	231	188	54	95	78	6,000
CDRH 2X2	MXF-04	1,170	207	95	220	102	84	257	188	98	95	78	7,200
CDRH 2X3	MXF-06	1,705	251	95	264	102	84	301	188	142	95	78	8,300
CDRH 2X4	MXF-08	2,280	295	95	308	102	84	345	188	186	95	78	9,800
CDRH 2X5	MXF-10	2,850	339	95	352	102	84	389	188	230	95	78	10,600
CDRH 2X6	MXF-12	3,385	383	95	396	102	84	433	188	274	95	78	11,800
CDRH 2X7	MXF-14	3,920	427	95	440	102	84	477	188	318	95	78	13,000

1. MAXIMUM SHIPPING WIDTH OF UNIT, INCLUDING STUB OUT: 102.00". 
2. IN CASE OF CONDENSER MOTOR CHANGE UNIT HEIGHT AND WEIGHT WILL VARY. 
3. 20X36 RECEIVER WILL BE MOUNTED INSIDE THE UNIT, IN CASE OF RECEIVER OTHER THAN 20X36 SIZE, IT WILL BE MOUNTED UNDERNEATH THE CONDENSER. 
4. COND WEIGHT AND OVER ALL WEIGHT MAY VARY DEPENDING ON THE TYPE OF CONDENSER. 

DO NOT SCALE. DIMENSIONS TO OUTSIDE UNLESS OTHERWISE NOTED.
PART TO BE FREE OF BURRS, SHARP EDGES, AND CORNERS

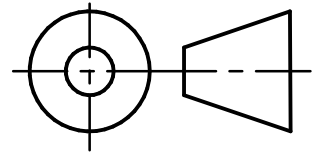UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.	 THIRD ANGLE PROJECTION
HUSSMANN® CDRH UNIT WITH MX CONDENSERS	
SHEET 1 OF 5	P/N SUBMITTAL ^{REV} A

CDRH UNIT - MICROCHANNEL CONFIGURATION

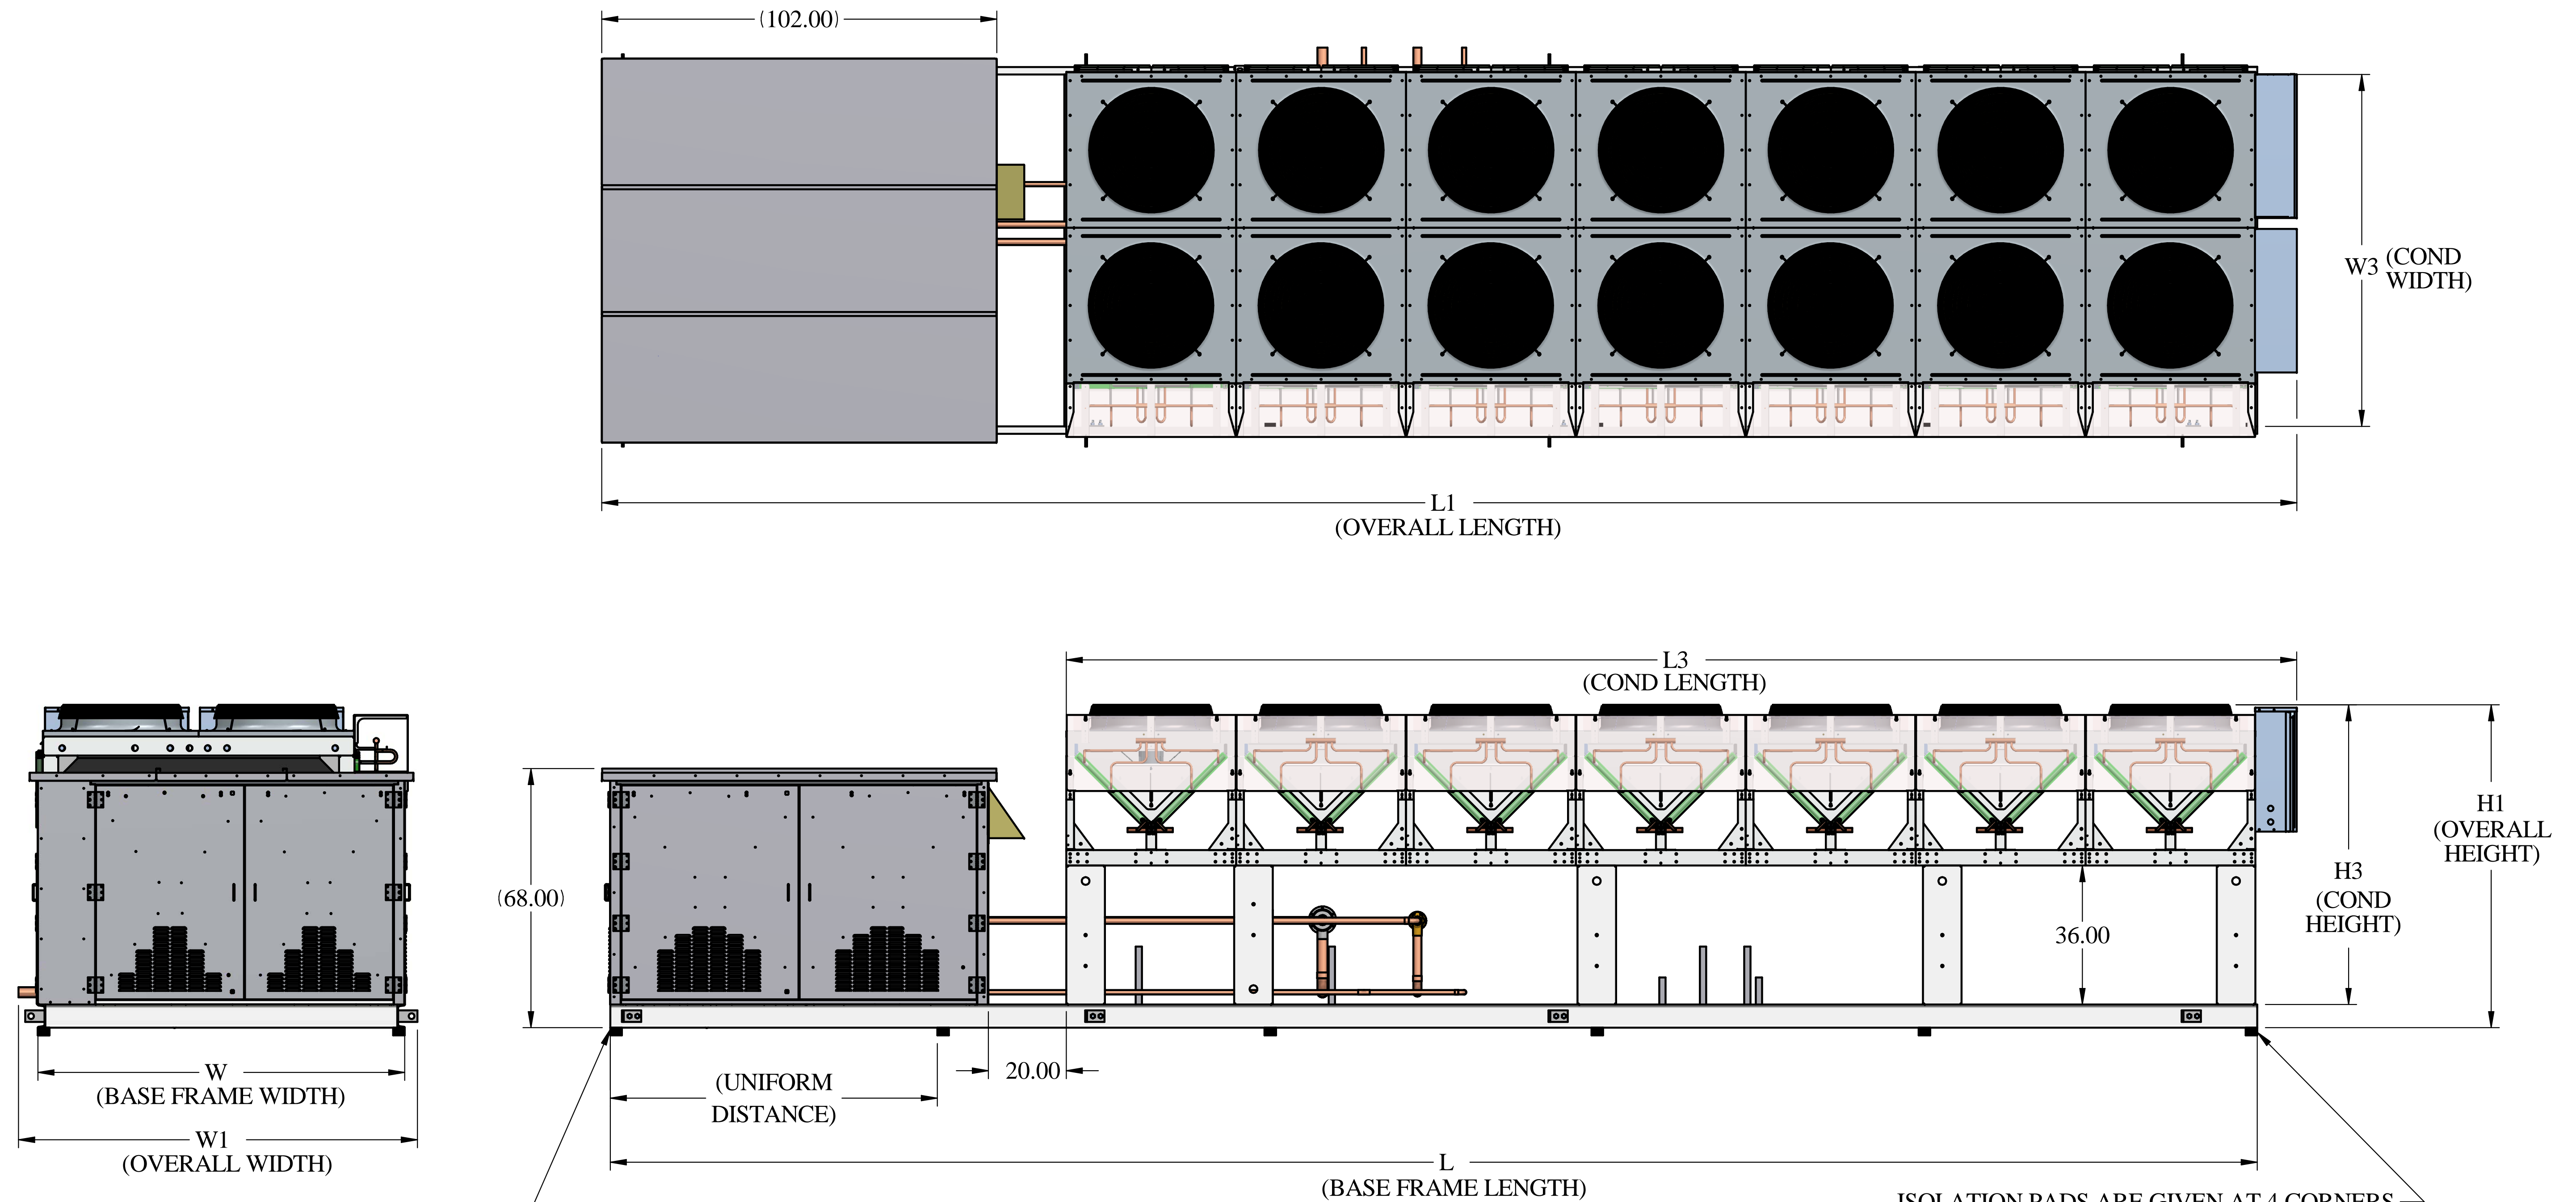


ISOLATION PAD 3X3X2", KIP PADS
QTY OF ISOLATION PADS IS SELECTED BASED ON
WEIGHT OF THE UNIT.





ISOLATION PADS ARE GIVEN AT 4 CORNERS
AND REST OF THEM ARE UNIFORMLY DISTRIBUTED
ALONG THE LENGTH OF THE FRAME

1. MAXIMUM SHIPPING WIDTH OF UNIT, INCLUDING STUB OUT: 102.00".
2. IN CASE OF CONDENSER MOTOR CHANGE UNIT HEIGHT AND WEIGHT WILL VARY.
3. 20X36 RECEIVER WILL BE MOUNTED INSIDE THE UNIT,
IN CASE OF RECEIVER OTHER THAN 20X36 SIZE,
IT WILL BE MOUNTED UNDERNEATH THE CONDENSER.
4. COND WEIGHT AND OVER ALL WEIGHT MAY VARY DEPENDING ON THE TYPE OF CONDENSER.

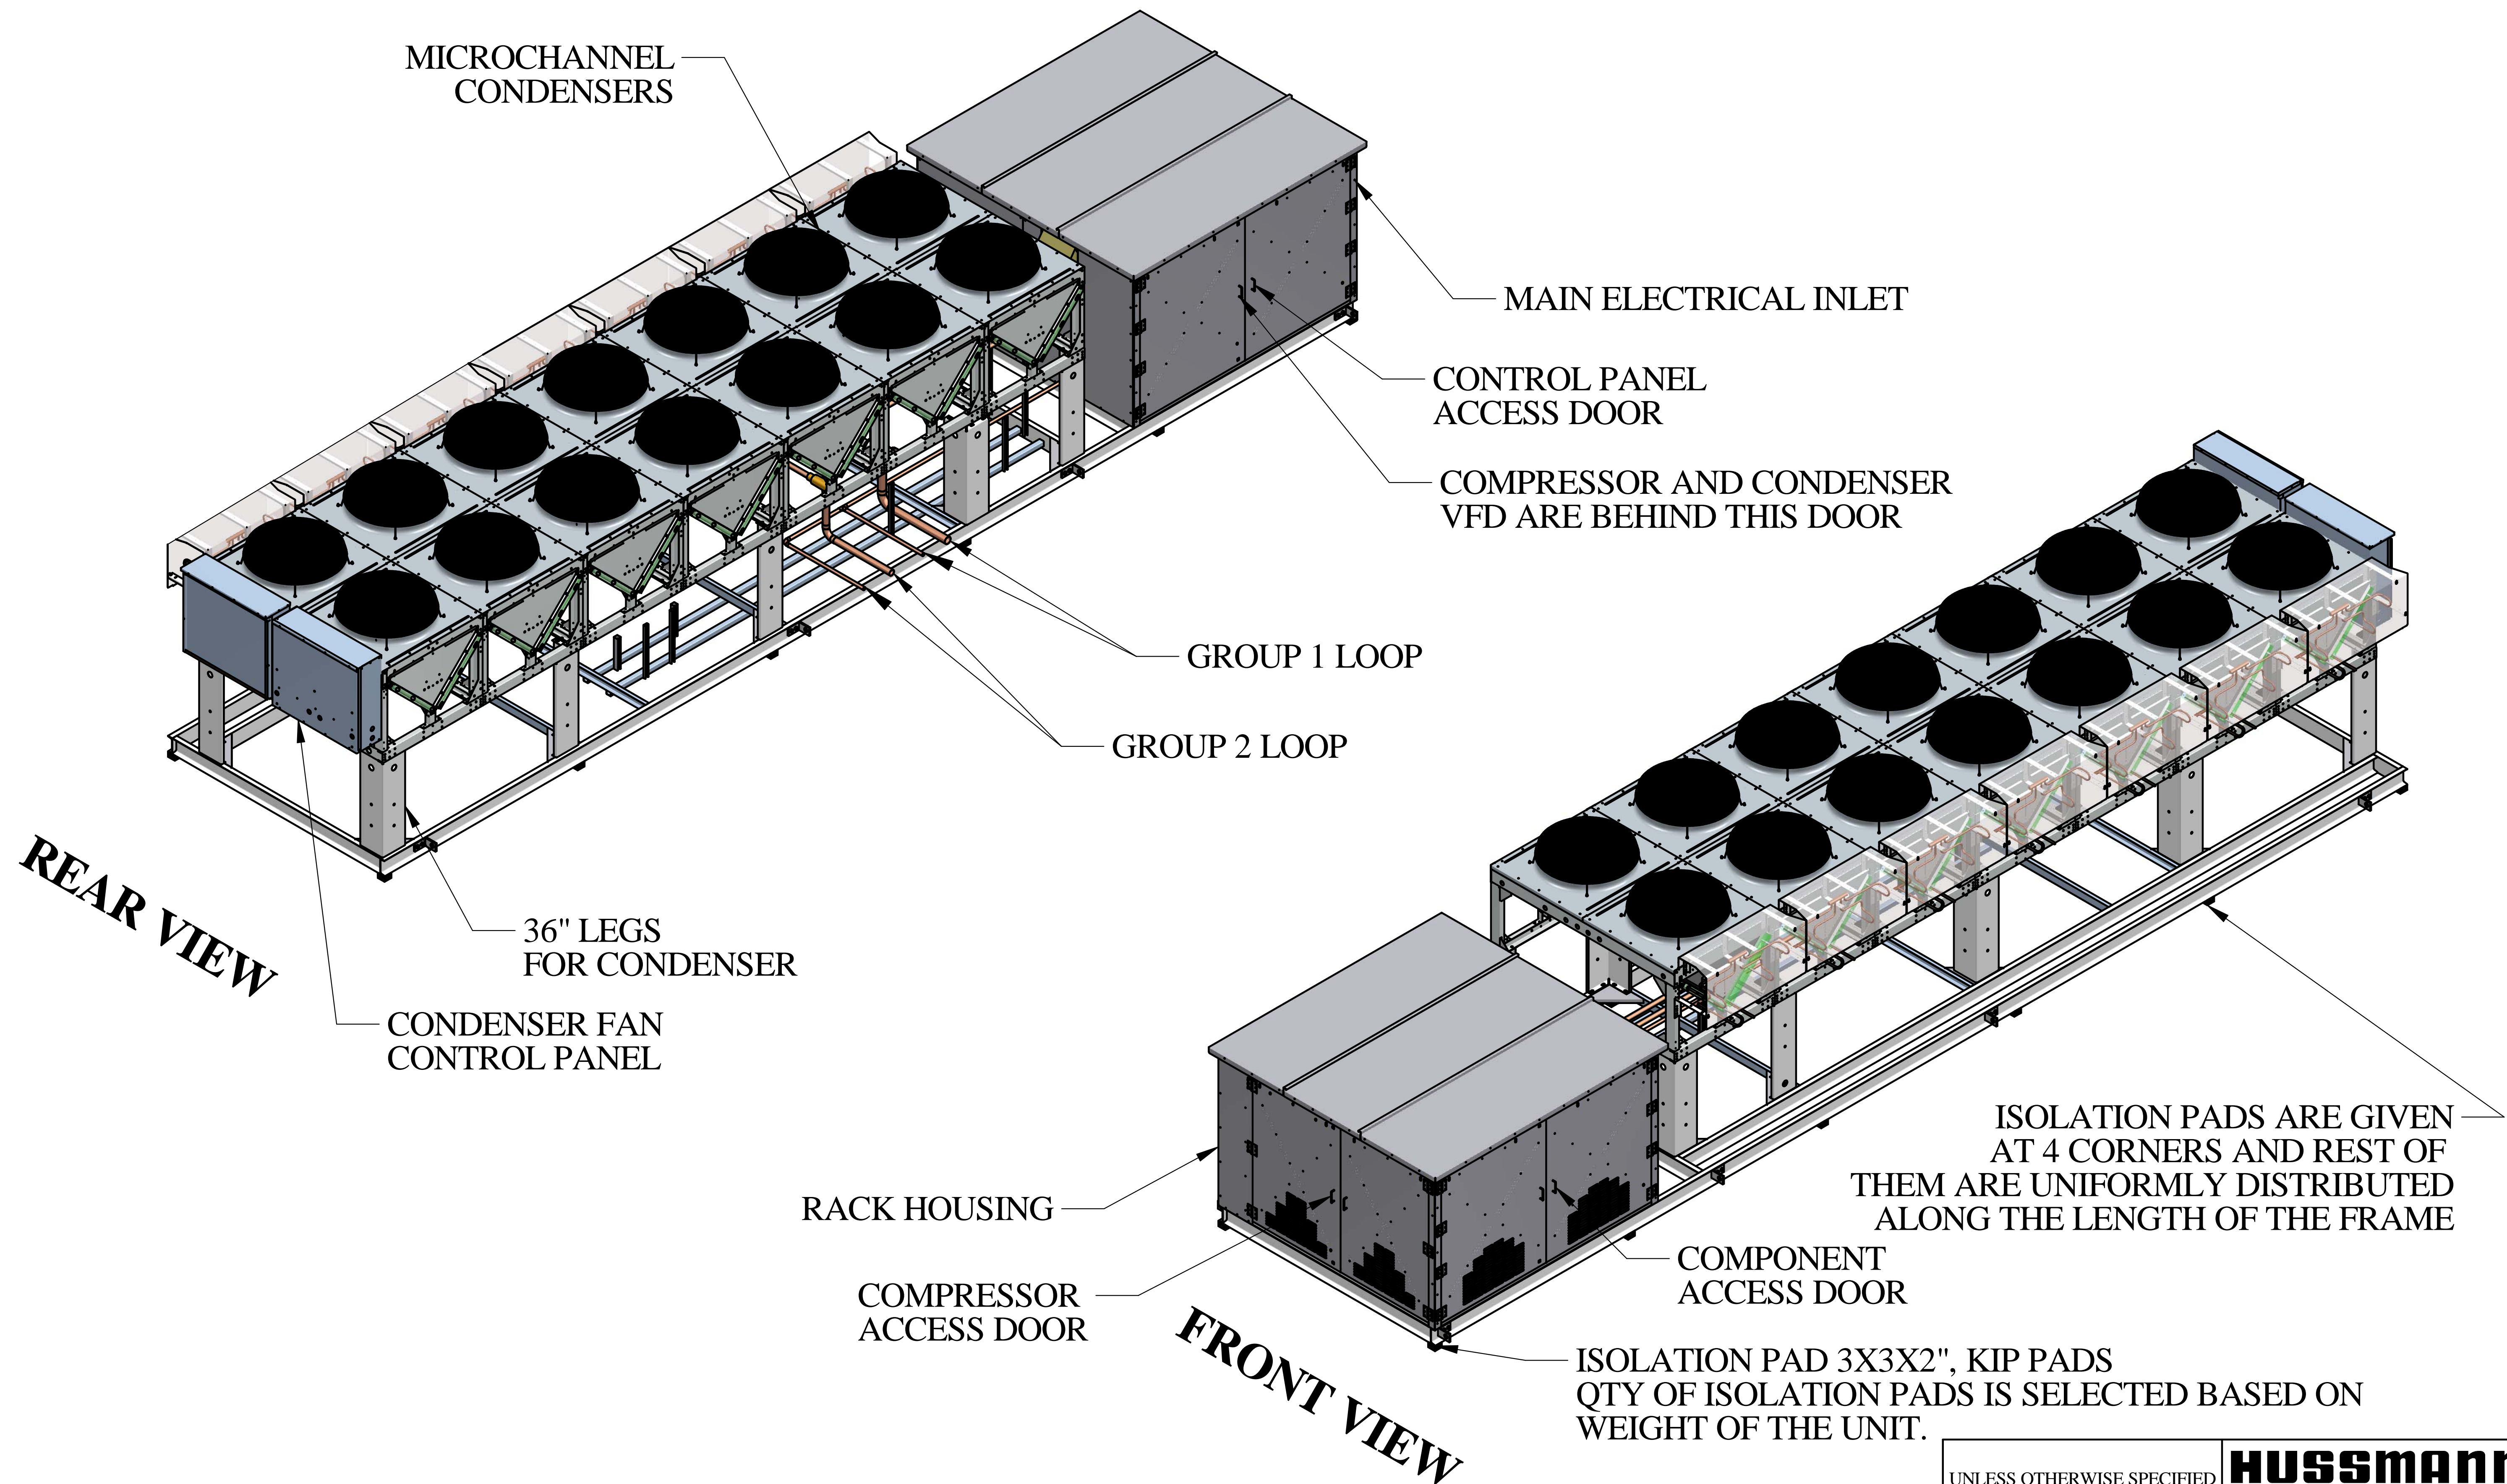
DO NOT SCALE. DIMENSIONS TO OUTSIDE UNLESS OTHERWISE NOTED.
PART TO BE FREE OF BURRS, SHARP EDGES, AND CORNERS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.	HUSSMANN®	
	CDRH UNIT WITH MX CONDENSERS	
	THIRD ANGLE PROJECTION	P/N SUBMITTAL REV A
SHEET 2 OF 5		






1. MAXIMUM SHIPPING WIDTH OF UNIT, INCLUDING STUB OUT: 102.00" 
2. IN CASE OF CONDENSER MOTOR CHANGE UNIT HEIGHT AND WEIGHT WILL VARY. 
3. 20X36 RECEIVER WILL BE MOUNTED INSIDE THE UNIT, IN CASE OF RECEIVER OTHER THAN 20X36 SIZE, IT WILL BE MOUNTED UNDERNEATH THE CONDENSER. 
4. COND WEIGHT AND OVER ALL WEIGHT MAY VARY DEPENDING ON THE TYPE OF CONDENSER. 

DO NOT SCALE. DIMENSIONS TO OUTSIDE UNLESS OTHERWISE NOTED.
PART TO BE FREE OF BURRS, SHARP EDGES, AND CORNERS

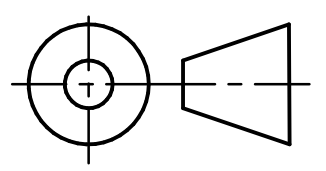UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.	HUSSmann [®]
 THIRD ANGLE PROJECTION	CDRH UNIT WITH MX CONDENSERS
SHEET 3 OF 5	P/N SUBMITTAL ^{REV} A

HINGE DOORS OPEN VIEWS

48" MIN CLEARANCE ON THIS SIDE FOR CONDENSER CONTROL PANEL ACCESS

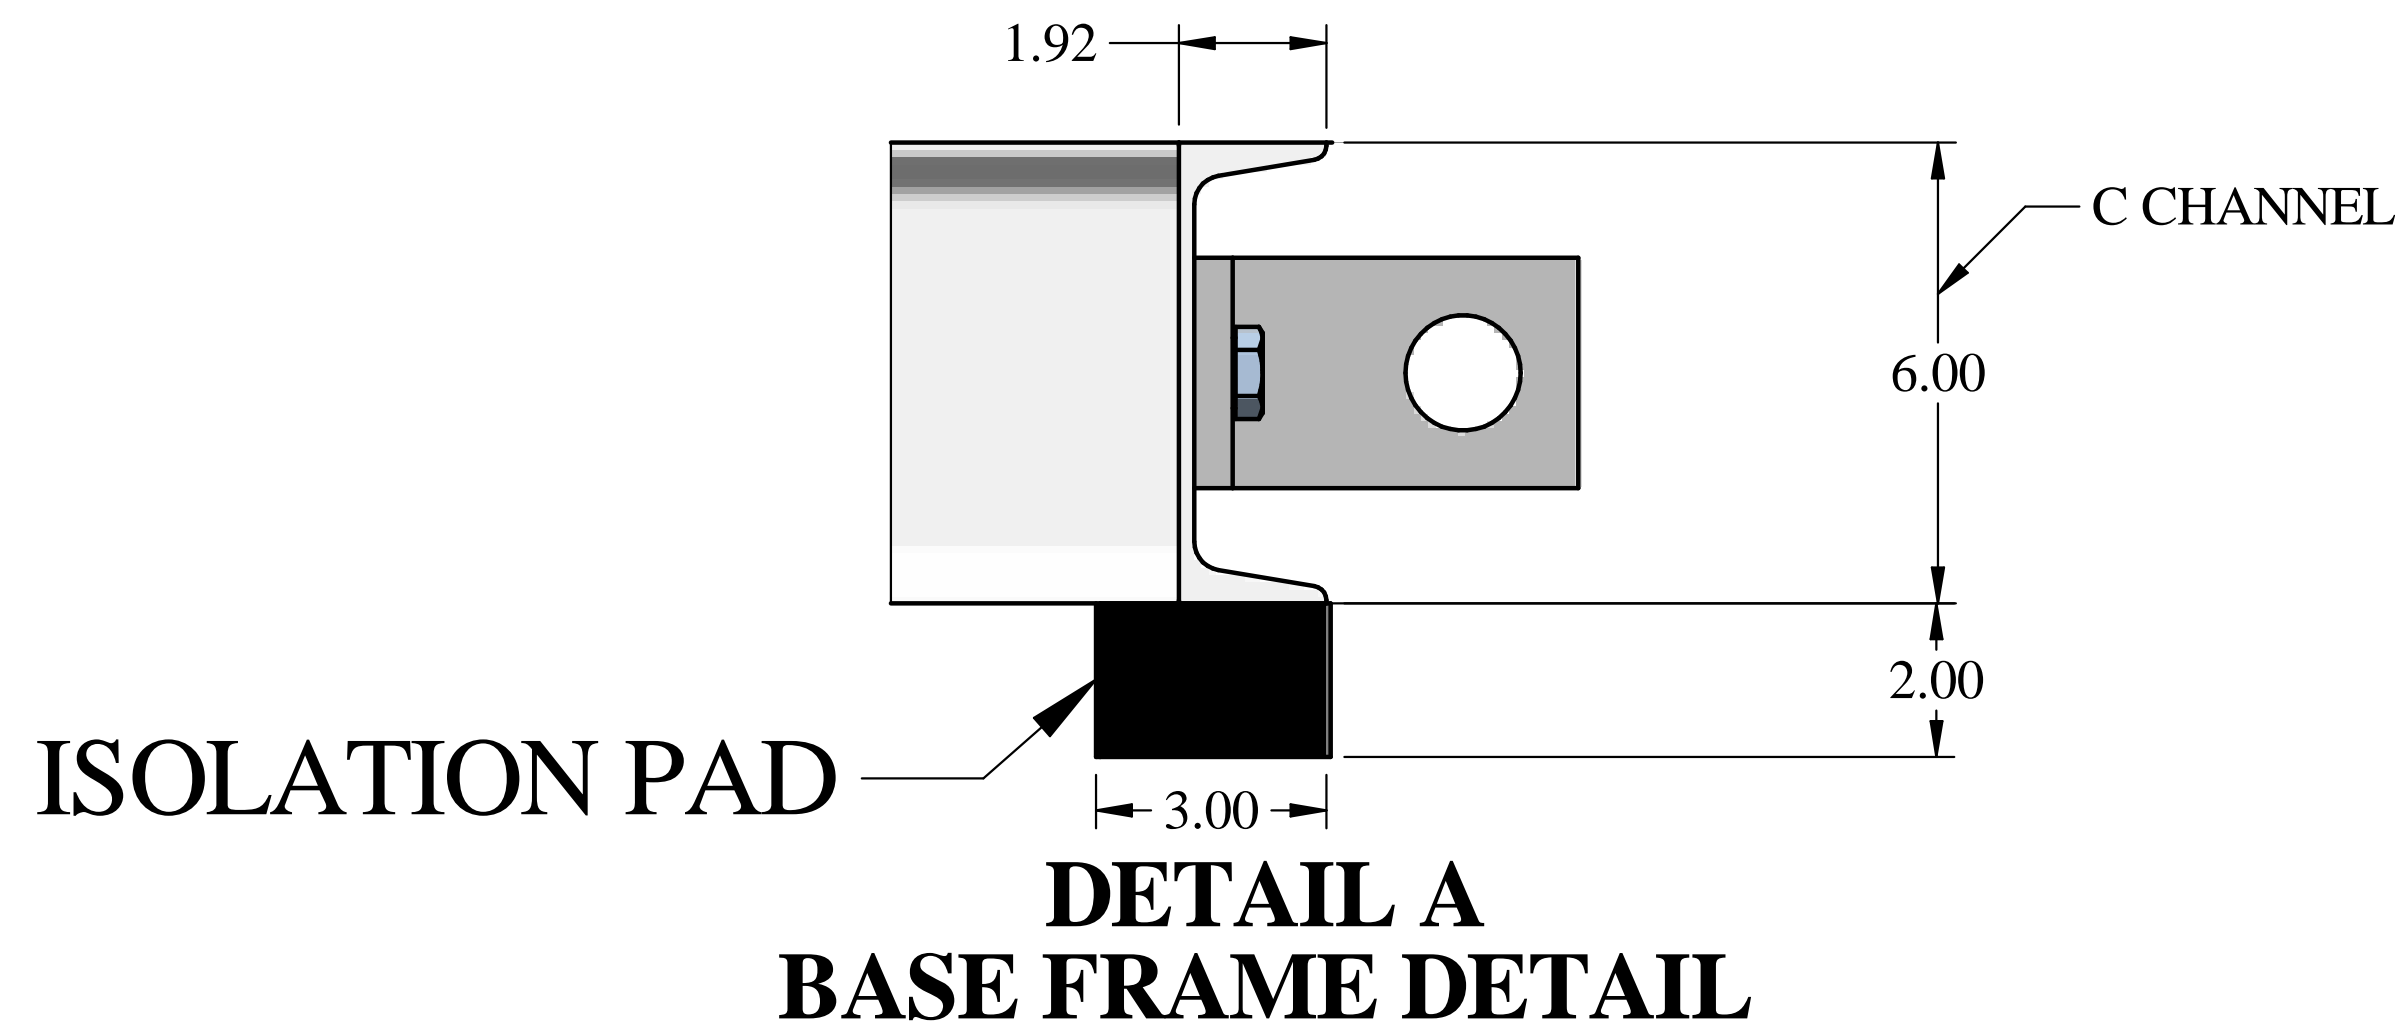
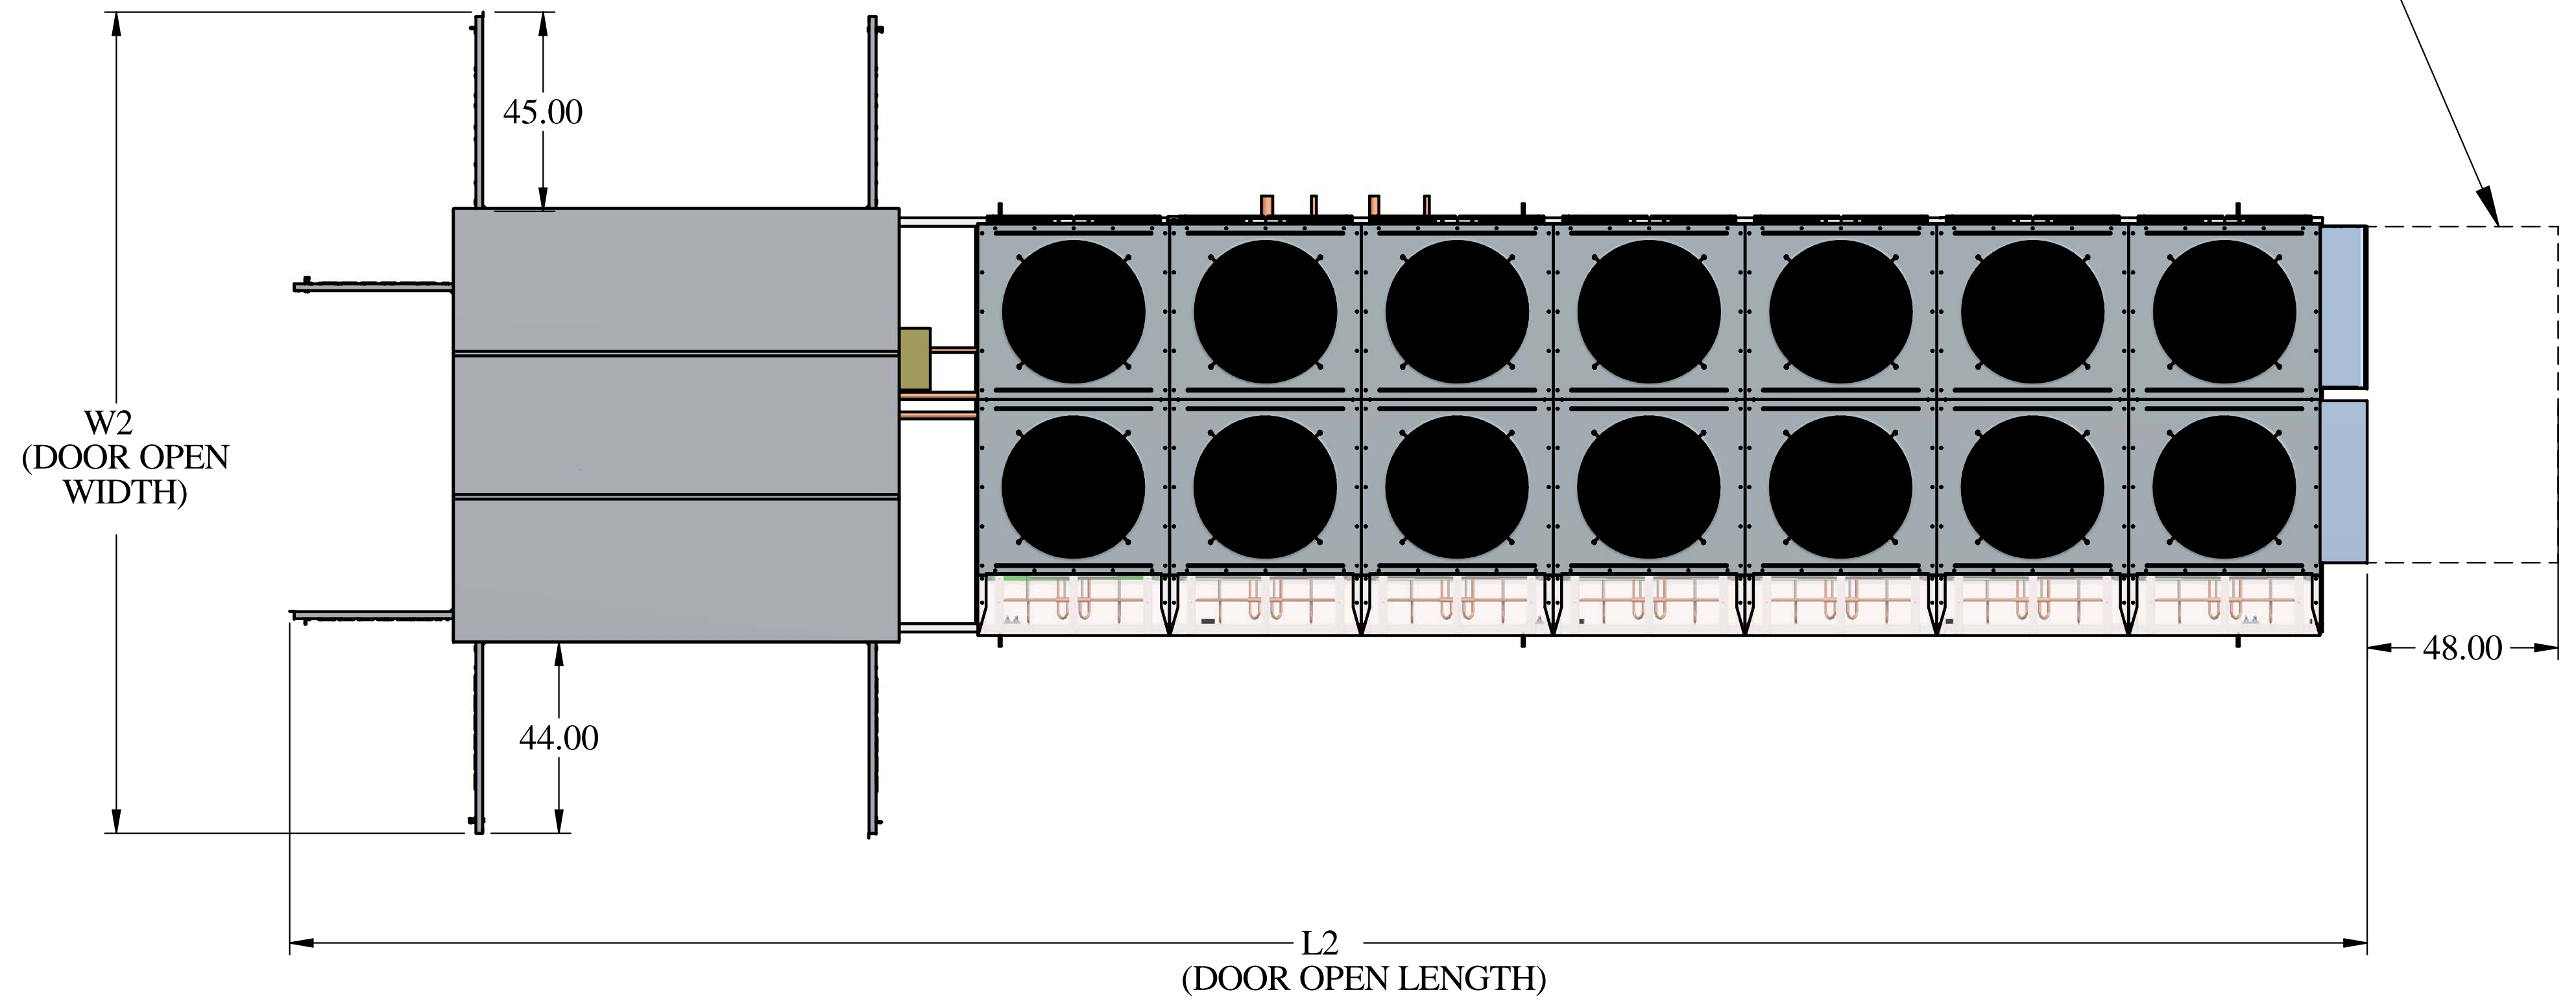
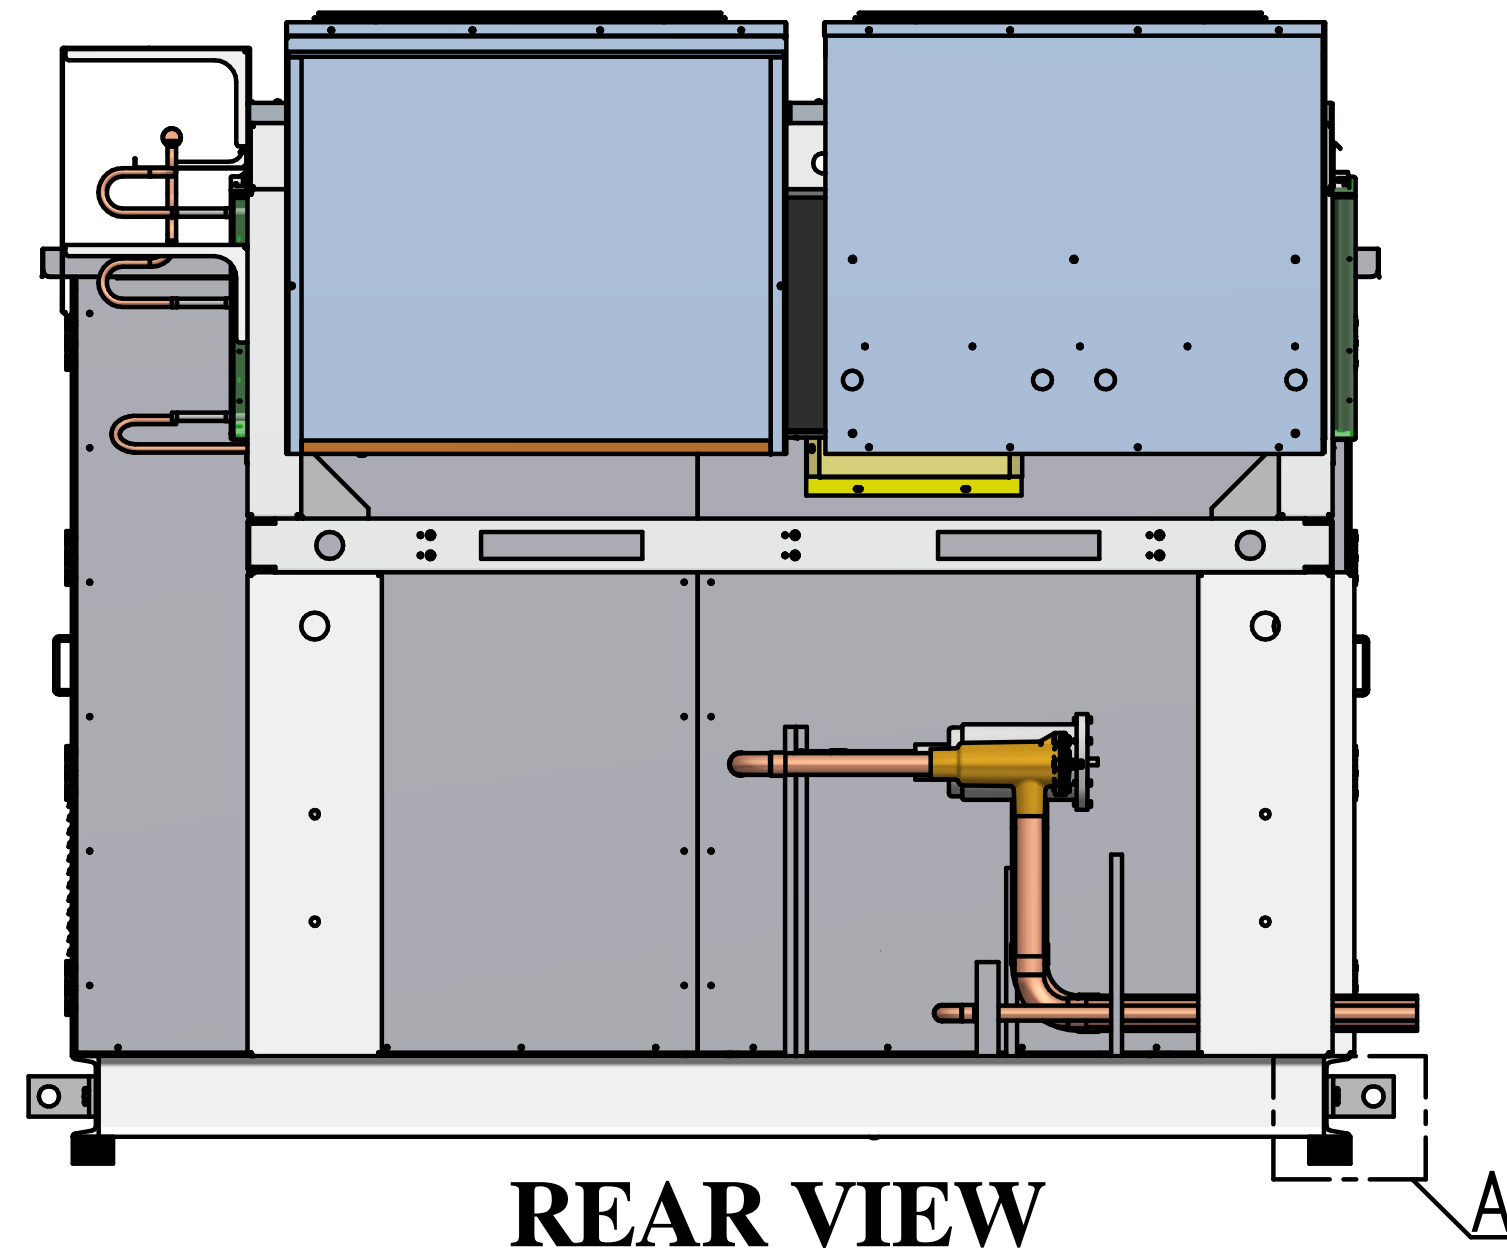


1. MAXIMUM SHIPPING WIDTH OF UNIT, INCLUDING STUB OUT: 102.00".
2. IN CASE OF CONDENSER MOTOR CHANGE UNIT HEIGHT AND WEIGHT WILL VARY.
3. 20X36 RECEIVER WILL BE MOUNTED INSIDE THE UNIT, IN CASE OF RECEIVER OTHER THAN 20X36 SIZE, IT WILL BE MOUNTED UNDERNEATH THE CONDENSER.
4. COND WEIGHT AND OVER ALL WEIGHT MAY VARY DEPENDING ON THE TYPE OF CONDENSER.

DO NOT SCALE. DIMENSIONS TO OUTSIDE UNLESS OTHERWISE NOTED.
PART TO BE FREE OF BURRS, SHARP EDGES, AND CORNERS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.	HUSSMANN®	
	CDRH UNIT WITH MX CONDENSERS	
	THIRD ANGLE PROJECTION	P/N SUBMITTAL REV A
SHEET 4 OF 5		

RIGGING FOR ILLUSTRATION ONLY

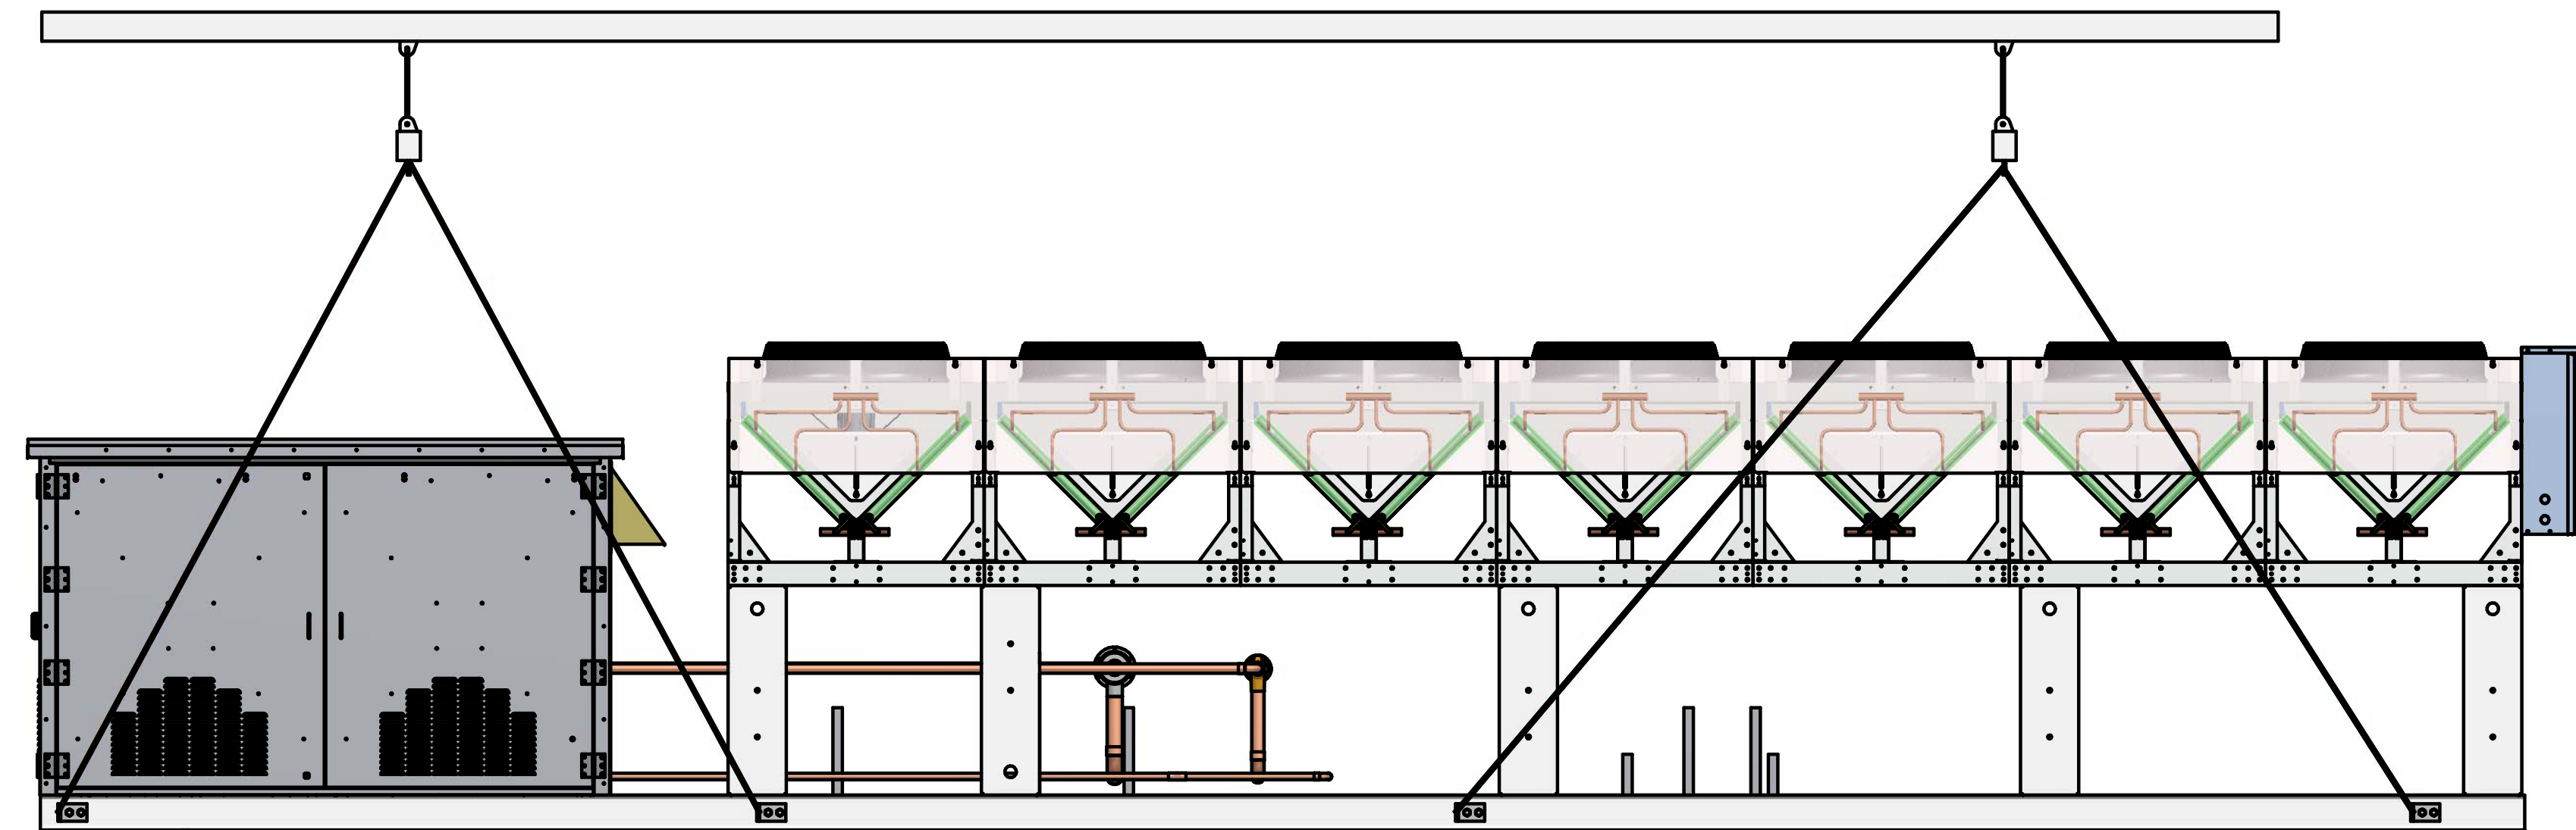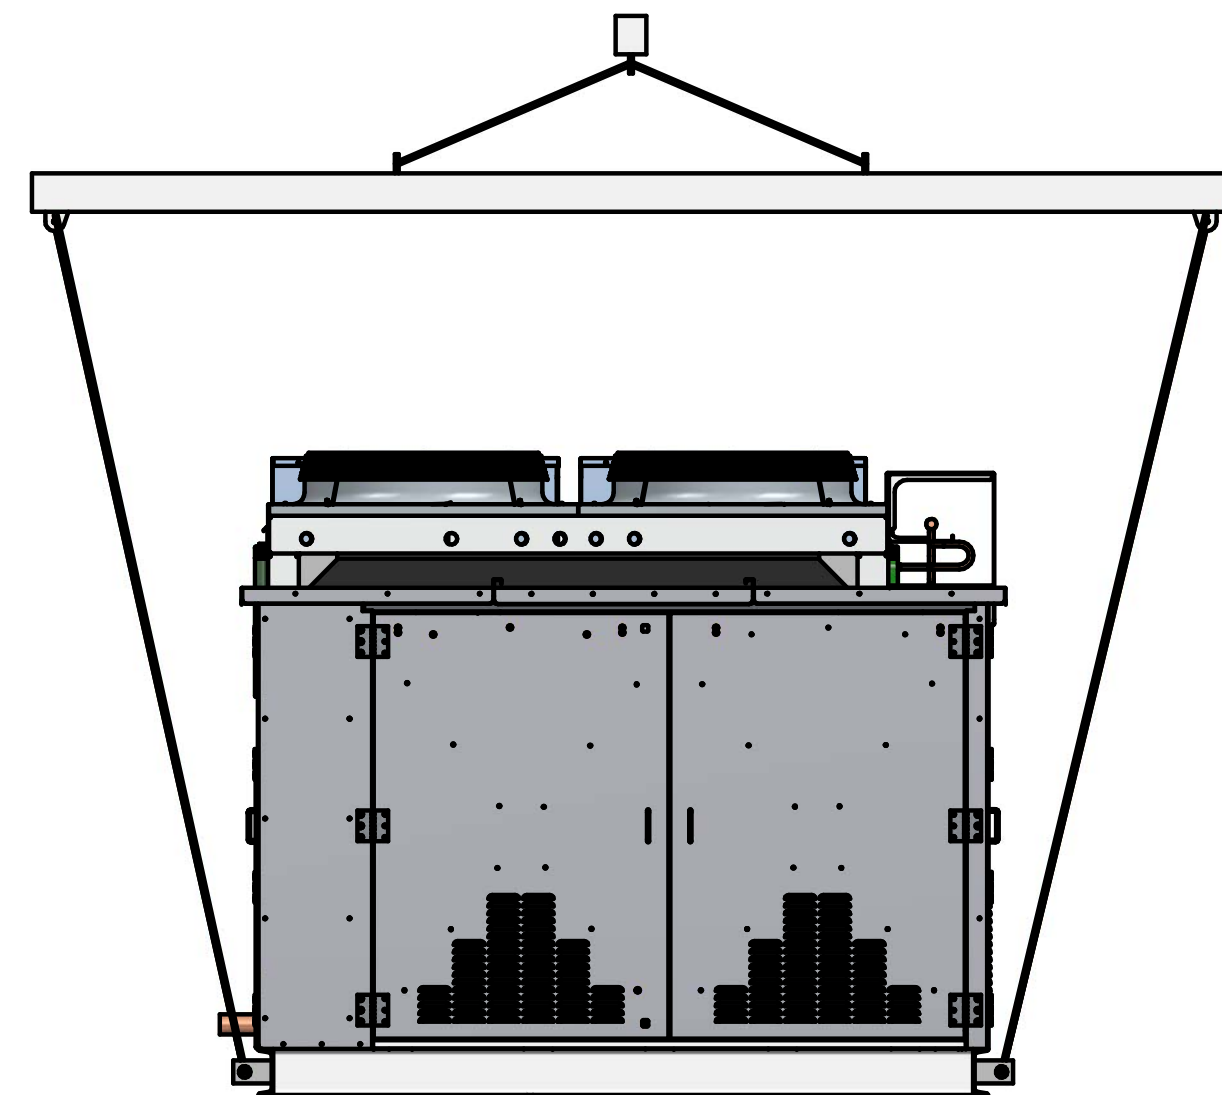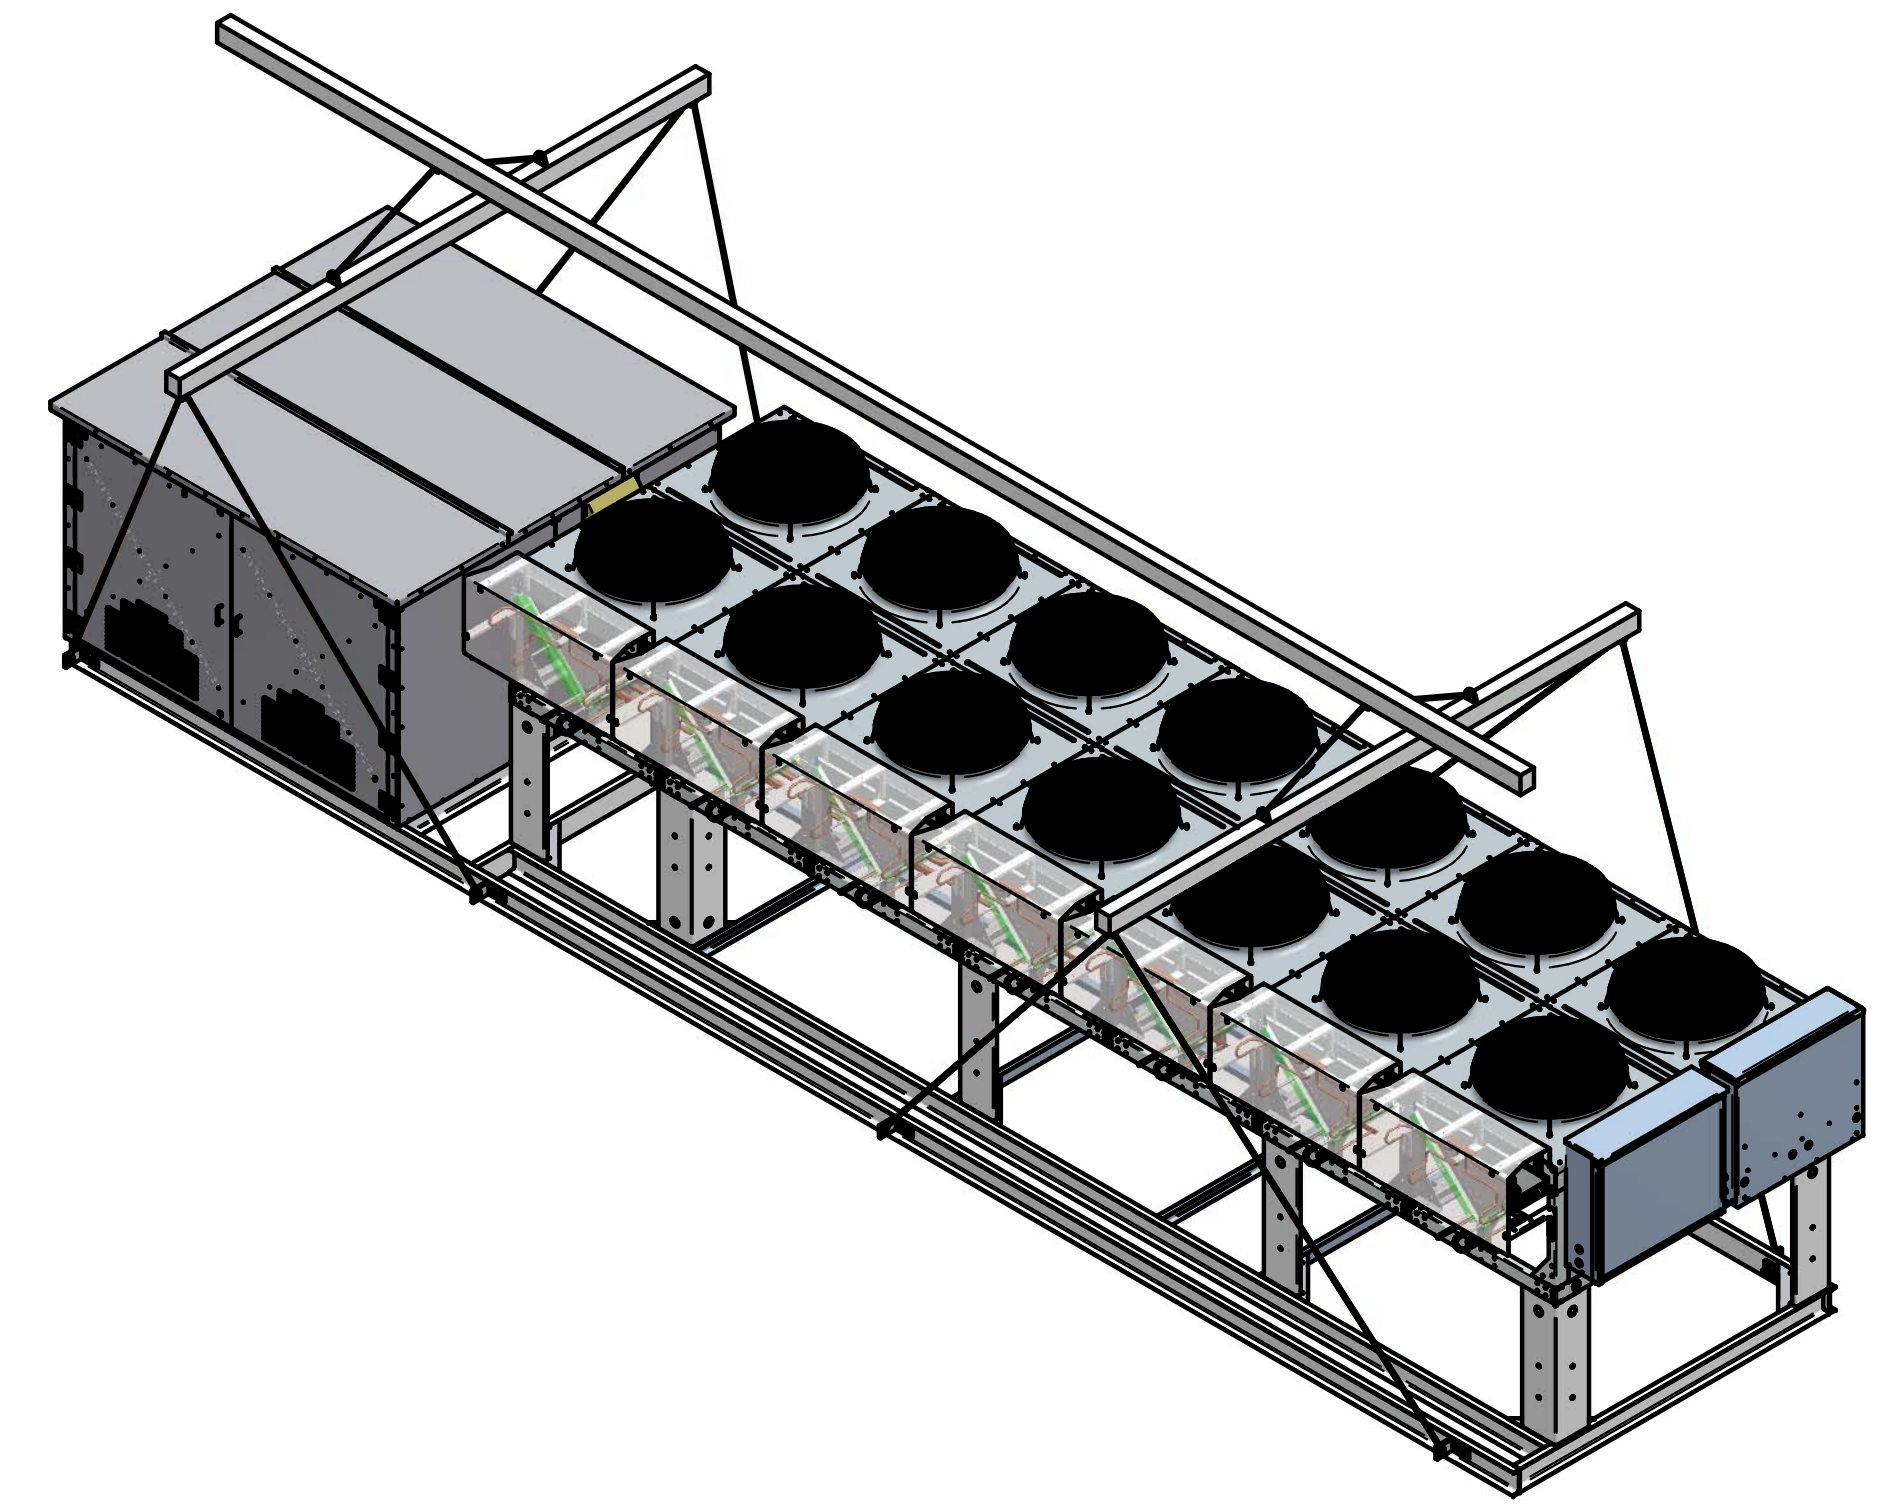

1. MAXIMUM SHIPPING WIDTH OF UNIT, INCLUDING STUB OUT: 102.00".
2. IN CASE OF CONDENSER MOTOR CHANGE UNIT HEIGHT AND WEIGHT WILL VARY.
3. 20X36 RECEIVER WILL BE MOUNTED INSIDE THE UNIT, IN CASE OF RECEIVER OTHER THAN 20X36 SIZE, IT WILL BE MOUNTED UNDERNEATH THE CONDENSER.
4. COND WEIGHT AND OVER ALL WEIGHT MAY VARY DEPENDING ON THE TYPE OF CONDENSER.

DO NOT SCALE. DIMENSIONS TO OUTSIDE UNLESS OTHERWISE NOTED.
PART TO BE FREE OF BURRS, SHARP EDGES, AND CORNERS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.	HUSSMANN [®]	
	CDRH UNIT WITH MX CONDENSERS	
	THIRD ANGLE PROJECTION	P/N SUBMITTAL
SHEET 5 OF 5	REV A	