










**SELF-SERVICE NON-CRITICAL TEMP PRODUCE SELF-CONTAINED**  
**HUSSMANN - MPC-SC (CHINO)**

REVISION DATE 11/16/22



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

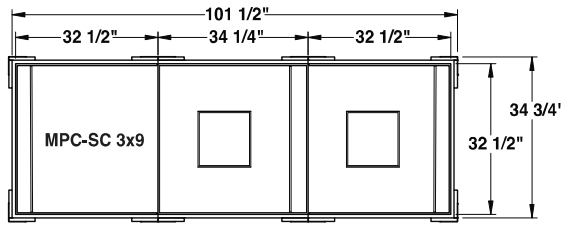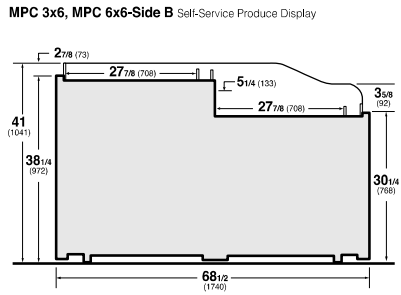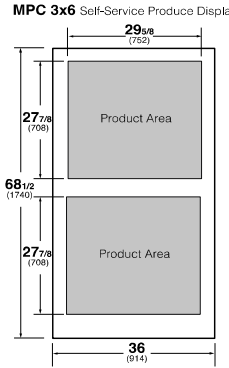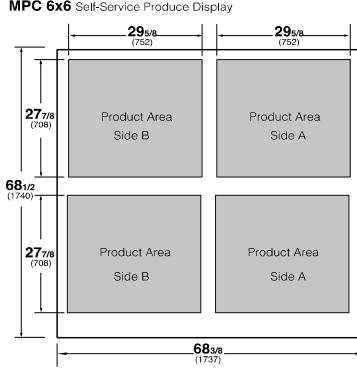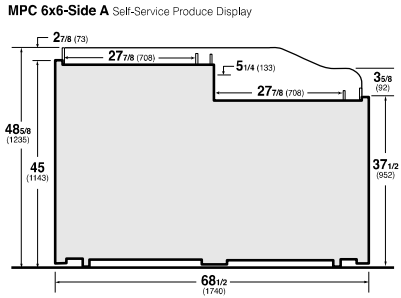

**REFRIGERATION DATA:**

CASE LENGTHS	CASE USAGE	CONVENTIONAL CAPACITY ** (BTU/HR)	DISCHARGE AIR * (°F)	VELOCITY (FT/MIN)
3X3	NON-CRITICAL PRODUCE	1335	34~36	130~180
3X6		2670	34~36	130~180
3X9		4005	34~36	130~180
6X6		5340	34~36	130~180

\*APPROVED FOR NON-CRITICAL TEMP PRODUCE ONLY.

\*\*DISCHARGE AIR MEASURED AT UPPER SECTION OUTLETS.

\*\*\*REFRIGERATION NOTES:

- 1) CAPACITY FOR REFERENCE ONLY
- 2) USE DEW POINT FOR HIGH GLIDE REFRIGERANTS. CARE SHOULD BE TAKEN TO USE THE DEW POINT IN P/T TABLES FOR MEASURING AND ADJUSTING SUPERHEAT.
- 3) RATING CONDITION IS NSF TYPE I, 75°F/55% RH

**REFRIGERATION DATA CONTINUED:**

CONTROLLER / AIR SENSOR SETTINGS			DEFROST TYPE	FAILSAFE TIME (MIN)	DEFROST FREQUENCY (#/DAY)	TERM. TEMP (°F) AIR	DRIP TIME (MIN)	DEFROST WATER (LBS/DAY/FT)
USAGE	SET POINT (°F)	DIFFERENTIAL (°F)						
PRODUCE	28	7	OFF TIME	30	6	54	NA	1

**ELECTRICAL DATA:**

CASE LENGTH	EVAPORATOR FANS					CANOPY LIGHTS LED		OPTIONAL LED SHELF LIGHTS		MAX. LED LOAD (W/ ALL OPTIONS)		ANTI-SWEAT HEATERS		CONVENIENCE OUTLETS (OPTIONAL)		
	# OF EVAP FANS	BLADE DIA. (IN.)	BLADE PITCH (°)	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	# OUTLETS	VOLTS	AMPS
3X3	1	6.7	20	0.12	8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
3X6	1	6.7	20	0.12	8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
3X9	2	6.7	20	0.24	16	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
6X6	2	6.7	25	0.24	16	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

**ELECTRICAL DATA CONTINUED:**

CASE LENGTH	CONDENSING UNIT					DRAIN EVAP PAN 1 PHASE				PLUG TYPE	EST. REFG. CHRG. (LBS)
	NOM. HP	REFRIG.	Hz / Ph	VOLTS	AMPS	AMPS	VOLTS	WATTS			
3X3	1/4	R-404A	60 / 1	120	4.0	8.3	120	1000	L5-20P	0.8	
3X6	1/2		60 / 1	120	10.0	8.3	120	1000	L5-30P	1.8	
3X9	3/4		60 / 1	240	6.8	7.2	240	1500	L14-30P	2.8	
6X6	3/4		60 / 1	120	15.0	8.3	120	1000	L5-30P	3.7	
3X6	1/4	R-448A	60 / 1	120	10.0	8.3	120	1000	L5-30P	1.8	
3X9	1		60 / 1	240	9.3	7.2	240	1500	L14-30P	2.8	
6X6	3/4		60 / 1	120	15.0	8.3	120	1000	L5-30P	3.7	