

Multideck, 5 Display Levels, 22 1/2 inch Front
Solid Back (Z) or Sliding Rear Doors (X)

Vision NDD5 LIT
Delicatessen

Refrigeration Data

Discharge Air °F	28	30	*32
Evaporator °F	12	15	18
Unit Sizing °F	10	13	16

BTU/HR/FOOT

Parallel	1750	1740	1670
Satellite	1800	1785	1715
Conventional	1845	1830	1760

*Hussmann recommends.

Defrost Data

Frequency Hrs	6
---------------	---

ELECTRIC

Temp Term °F	48
Failsafe Min	26

REVERSE AIR

Temp Term °F	48
Failsafe Min	40

GAS

Duration Min	14
--------------	----

OFFTIME

Duration Min	40
--------------	----

Conventional Controls

Low Pressure Backup Control
C/CO (PSIG)

R-22 34/24	R-502 42/32
------------	-------------

Indoor Condenser only, Pressure Defrost Termination (PSIG)

R-22 82	R-502 96
---------	----------

Physical Data

Merchandise



Drip Pipe (ins)	1 1/2
Liquid Line (ins)	3/8
Suction Line (ins)	1 1/8

Evaporator Estimated Charge

Length	R-22 (lbs)	R-502 (lbs)
8	14	15
12	22	23

Length Added to Lineup by Ends and Partitions

Each End (ins)	1 1/2
Each Insulated Partition (ins)	1 1/2

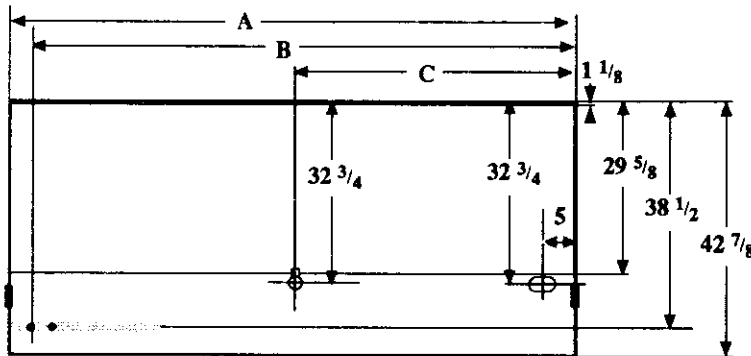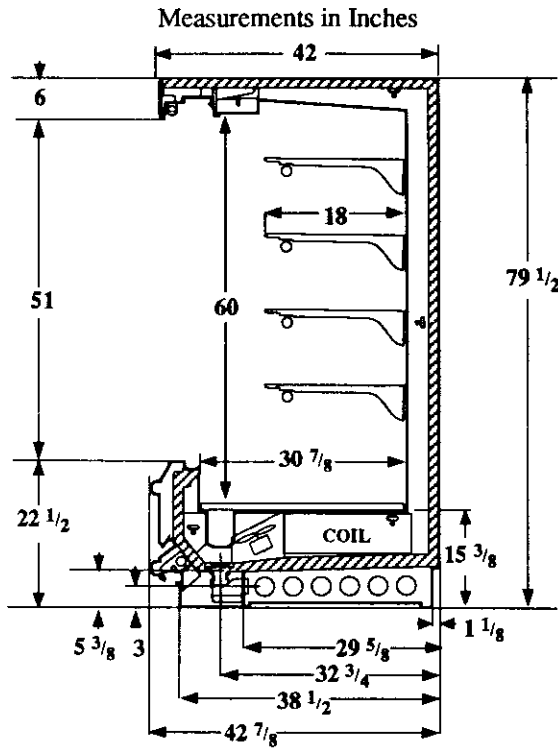

	Dimension	8' Case	12' Case
Electrical Service	A	96 1/4	144 3/8
Waste Outlet	B	92	140 1/8
Refrigeration Outlet	C	48 1/8	72 1/8
Passageway Port			

Revised 12-15-93

Vision NDD5 LIT Delicatessen

Electrical Data

Merchandiser	8Ft		12Ft	
	Amperes	Watts	Amperes	Watts
Number of Fans - Evaporator	2		3	
Number of Fans - Evaporator with Reverse Air Defrost	4		6	
Merchandiser	8Ft	12Ft	8Ft	12Ft
Fans				
Standard Fans	3.20	4.80	220	330
Energy Efficient Fans	1.66	2.49	110	165
Reverse Air	1.24	1.96	120	180
Constant on Anti-sweat Heaters	NA			
Cycling Anti-sweat Heaters	NA			
Min. Circuit Ampacity				
With Standard Fans	3.40	5.00		
With Energy Efficient Fans	1.86	2.69		
With Reverse Air	1.44	2.16		
Max. Over Current Protection	20	20		
Supplemental Gas Heaters	NA			
208V 1Φ Electric Defrost	5.2	7.8	1082	1622
120V 1Φ Supplemental Rev. Air	NA			
Standard Lighting*				
1 Row Canopy	[7.8]	[11.9]		
Advance	1.30	1.90	135	220
Valmont (GE)	1.03	2.10	117	257
Magnatec/Universal	1.20	1.80	135	215

*[] = Serial Plate Amperage includes wire harness for 4 rows of lighted shelves.