


Multideck, 5 Display Levels, 18 inch Front
Solid Back (Z)

Vision NDD5L PEG
Delicatessen

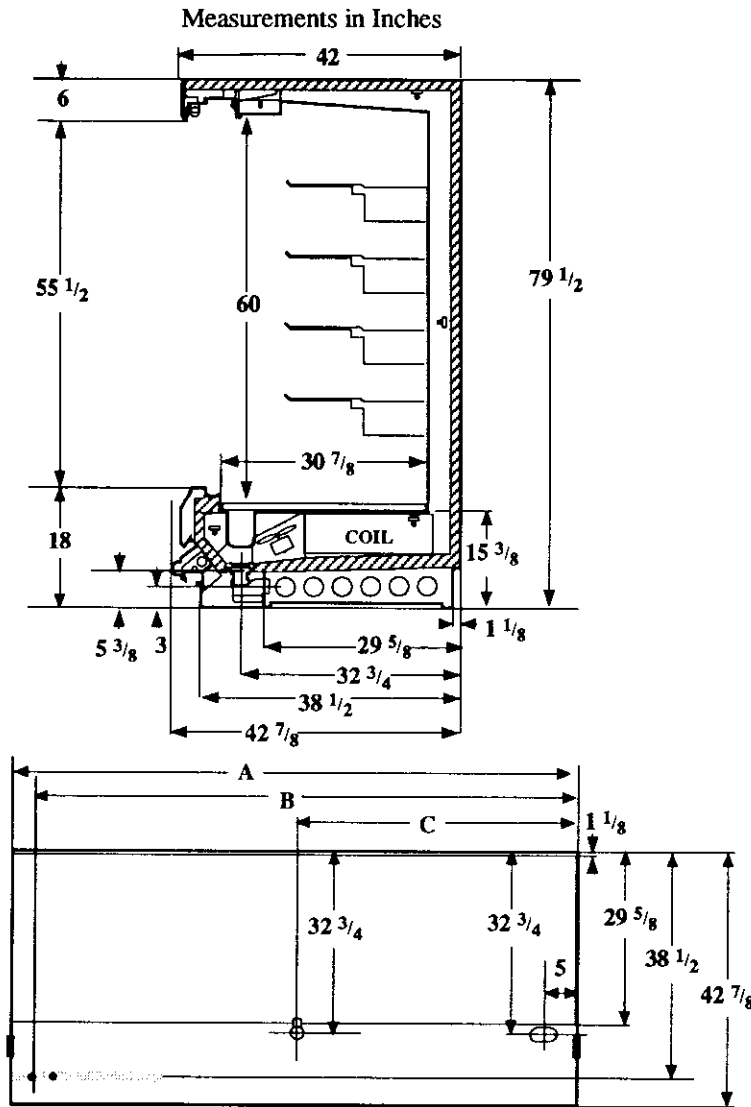

	Dimension	8' Case	12' Case
⊗	A	96 1/4	144 3/8
⊕	B	92	140 1/8
⊖	C	48 1/8	72 1/8

Revised 12-15-93

Refrigeration Data

Discharge Air °F	28	30	*32
Evaporator °F	12	15	18
Unit Sizing °F	10	13	16

<i>BTU/HR/FOOT</i>			
Parallel	2120	2100	1980
Satellite	2175	2155	2030
Conventional	2230	2210	2085

*Hussmann recommends.

Defrost Data

Frequency Hrs	6
<i>ELECTRIC</i>	
Temp Term °F	48
Failsafe Min	26
<i>REVERSE AIR</i>	
Temp Term °F	48
Failsafe Min	40
<i>GAS</i>	
Duration Min	14
<i>OFFTIME</i>	
Duration Min	40

Conventional Controls

Low Pressure Backup Control		
CI/CO (PSIG)		
R-22 34/24	R-502	42/32
Indoor Condenser only, Pressure Defrost Termination (PSIG)		
R-22 82	R-502	96

Physical Data

Merchandise	
Drip Pipe (ins)	1 1/2
Liquid Line (ins)	3/8
Suction Line (ins)	1 1/8

Evaporator Estimated Charge		
Length	R-22	R-502
	(lbs)	(lbs)
8	14	15
12	22	23

Length Added to Lineup by Ends and Partitions

Each End (ins) 1 1/2

Each Insulated Partition (ins) 1 1/2

Vision NDD5L PEG Delicatessen
--

Electrical Data

Merchandiser	8Ft	12Ft		
Number of Fans - Evaporator	2	3		
Number of Fans - Evaporator with Reverse Air Defrost	4	6		
	Amperes		Watts	
Merchandiser	8Ft	12Ft	8Ft	12Ft
Fans				
Standard Fans	3.20	4.80	220	330
Energy Efficient Fans	1.66	2.49	110	165
Reverse Air	1.24	1.96	120	180
Constant on Anti-sweat Heaters	NA			
Cycling Anti-sweat Heaters	NA			
Min. Circuit Ampacity				
With Standard Fans	3.40	5.00		
With Energy Efficient Fans	1.86	2.69		
With Reverse Air	1.44	2.16		
Max. Over Current Protection	20	20		
Supplemental Gas Heaters	NA			
208V 1Φ Electric Defrost	5.2	7.8	1082	1622
120V 1Φ Supplemental Rev. Air	NA			
Standard Lighting*				
1 Row Canopy	[7.8]	[11.9]		
Advance	1.30	1.90	135	220
Valmont (GE)	1.03	2.10	117	257
Magnatec/Universal	1.20	1.80	135	215

*[] = Serial Plate Amperage includes wire harness for 4 rows of lighted shelves.

Revised 12-15-93

HUSSMANN CORPORATION • BRIDGETON, MO 63044