

VuMor, Gravity Coil, 3 Display Levels (including Mezzanine Shelves),
Rear Sliding Doors, 29 inch Front Glass



Refrigeration Data

Discharge Temp °F	24
Evaporator °F	22
Unit Sizing °F	20
<i>BTU/HR/FOOT</i>	
Parallel	162
Satellite	166
Conventional	170
Both EPR and Thermostat Required	

Defrost Data

Frequency Hrs	24
<i>ELECTRIC</i>	
Temp Term °F	NA
Fallsafe Min	NA
<i>REVERSE AIR</i>	
Temp Term °F	NA
Fallsafe Min	NA
<i>GAS</i>	
Duration Min	NA
<i>OFFTIME</i>	
Duration Min	110

Conventional Controls

Low Pressure Backup Control	
CI/CO (PSIG)	
R-22 38/28	R-502 47/37
Indoor Condenser only, Pressure	
Defrost Termination (PSIG)	
R-22 76	R-502 89

Physical Data


Merchandise	
Drip Pipe (in.)	2
Liquid Line (in.)	3/8
Suction Line (in.)	5/8

Evaporator Estimated Charge

Length	R-22 (lbs)	R-502 (lbs)
8'	17	17
12'	25	25

**Length Added to Lineup by
Ends and Partitions**

Each End (in.)	1 1/2
Each Partition (in.)	1 1/2

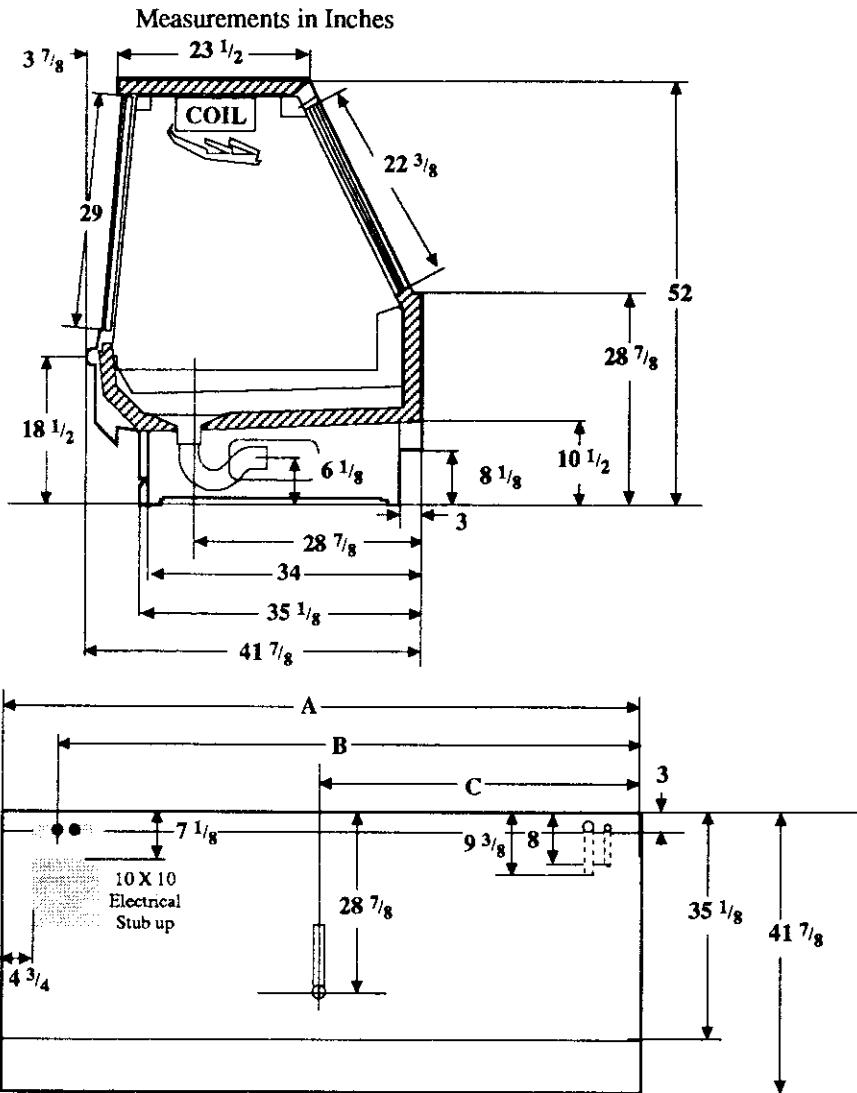

Electrical Service	Dimension	8' Case	12' Case
Waste Outlet	A	96 1/8	144 1/2
Refrigeration Line	B	87 5/8	136
Connection	C	48	72 1/4

Vision NVGC Delicatessen

Electrical Data

Merchandiser	8Ft	12Ft		
Number of Fans - Evaporator	NA			

Merchandiser	Amperes		Watts	
	8Ft	12Ft	8Ft	12Ft
Fans	NA			
Enrg Eff Fans (Reverse Air)	NA			
Constant on Anti-sweat Heaters	NA			
Cycling Anti-sweat Heaters	NA			
Supplemental Gas Heaters	NA			
Min. Circuit Ampacity	NA			
With Enrg Eff Fans (Reverse Air)	NA			
Max. Over Current Protection	20	20		
208V 1Φ Electric Defrost	NA			
120V 1Φ Supplemental Rev. Air	NA			

Standard Lighting

1 Row Top Interior				
Advance	0.73	1.19	86	141
Valmont (GE)	0.73	1.13	86	134
Magnatec/Universal	0.73	1.17	86	136

Revised 12-15-93

HUSSMANN CORPORATION • BRIDGETON, MO 63044