

VuMor, Non-refrigerated, Single Display Level, Rear Sliding Doors,
22 inch Front Glass

Vision **NVSA**
Seafood

Refrigeration Data

Product Temp °F	NA
Evaporator °F	NA
Unit Sizing °F	NA
<i>BTU/HR/FOOT</i>	
Parallel	NA
Satellite	NA
Conventional	NA

Defrost Data

Frequency Hrs	NA
<i>ELECTRIC</i>	
Temp Term °F	NA
Failsafe Min	NA
<i>REVERSE AIR</i>	
Temp Term °F	NA
Failsafe Min	NA
<i>GAS</i>	
Duration Min	NA
<i>OFFTIME</i>	
Duration Min	NA

Conventional Controls


Low Pressure Backup Control	
CI/CO (PSIG)	
R-22 NA	R-502 NA
Indoor Condenser only, Pressure	
Defrost Termination (PSIG)	
R-22 NA	R-502 NA

Physical Data

Merchandise		
Drip Pipe (in.)	2	
Liquid Line (in.)	NA	
Suction Line (in.)	NA	
Evaporator Estimated Charge		
Length	R-22	R-502
	(lbs)	(lbs)
8'	NA	NA
12'	NA	NA

**Length Added to Lineup by
Ends and Partitions**

Each End (in.)	1 1/2
Each Partition (in.)	1 1/2

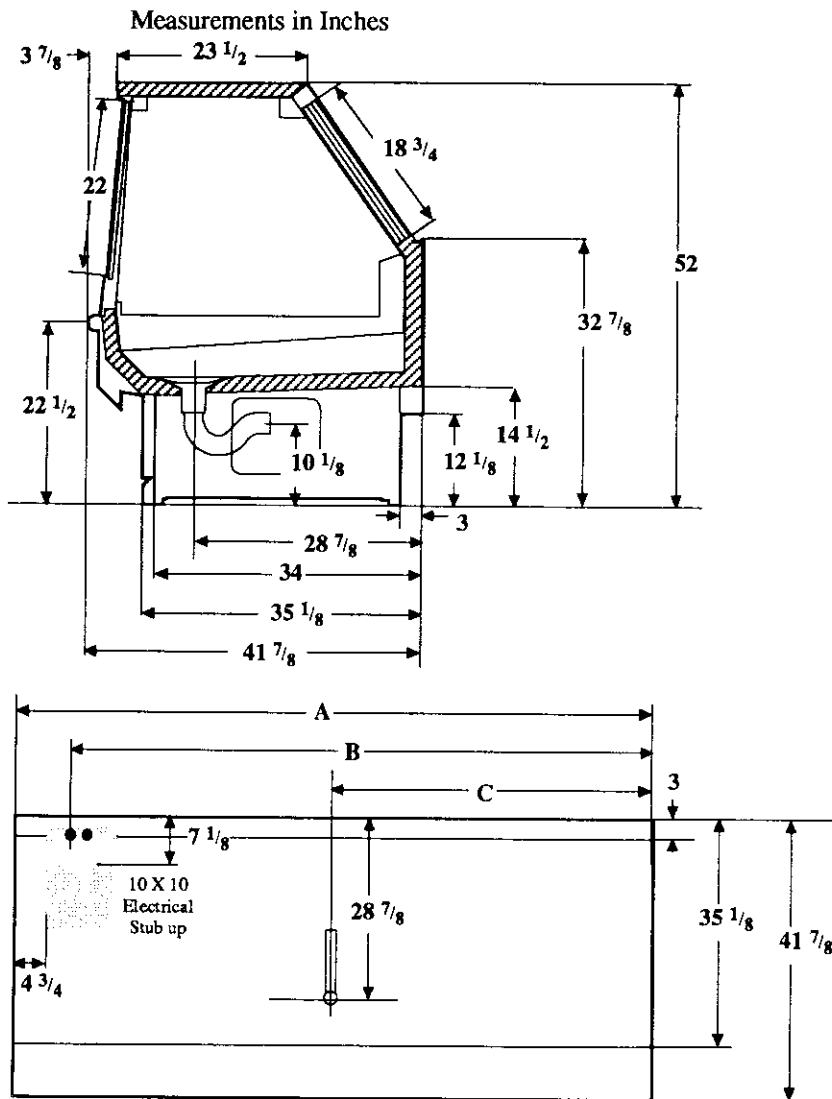

Electrical Service
Waste Outlet

Dimension	8' Case	12' Case
A	96 1/8	144 1/2
B	87 5/8	136
C	48	72 1/4

Vision NVSA Seafood

Electrical Data

Merchandiser	8Ft	12Ft
Number of Fans	NA	

Merchandiser	Amperes		Watts	
	8Ft	12Ft	8Ft	12Ft
Fans	NA			
Enrg Eff Fans (Reverse Air)	NA			
Constant on Anti-sweat Heaters	NA			
Cycling Anti-sweat Heaters	NA			
Supplemental Gas Heaters	NA			
Min. Circuit Ampacity	NA			
With Enrg Eff Fans (Reverse Air)	NA			
Max. Over Current Protection	20	20		
208V 1Φ Electric Defrost	NA			
120V 1Φ Supplemental Rev. Air	NA			

Standard Lighting

1 Row Top Interior				
Advance	0.73	1.19	86	141
Valmont (GE)	0.73	1.13	86	134
Magnatec/Universal	0.73	1.17	86	136

Revised 12-15-93

HUSSMANN CORPORATION • BRIDGETON, MO 63044