


**DOE 2017**  
Energy Efficiency  
Compliant



### NSF Certification

This merchandiser model is manufactured to meet NSF/ANSI (National Sanitation Foundation) Standard #7 requirements for construction, materials and cleanability.

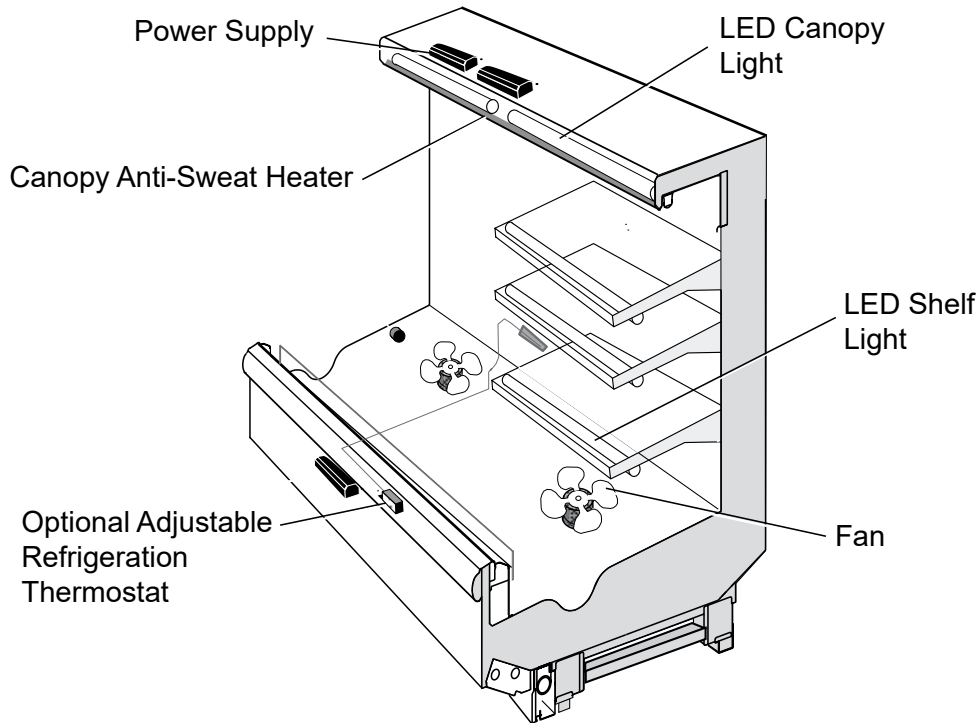

Scan the QR code on your mobile device to access additional product information or order parts.

Parts may also be ordered at:

[parts.hussmann.com](http://parts.hussmann.com)

Call toll free: 1.855.487.7778

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

Note: Revision M: Removed 4 foot.

Data sheet-Excel C2NX-XLE


# Engineering Plan Views

PHYSICAL DATA	
Merchandiser Drip Pipe (in.)	1 1/4
Merchandiser Liquid Line (in.)	3/8
Merchandiser Suction Line (in.)	7/8





## Dairy/Delicatessen Precut & Packaged Produce

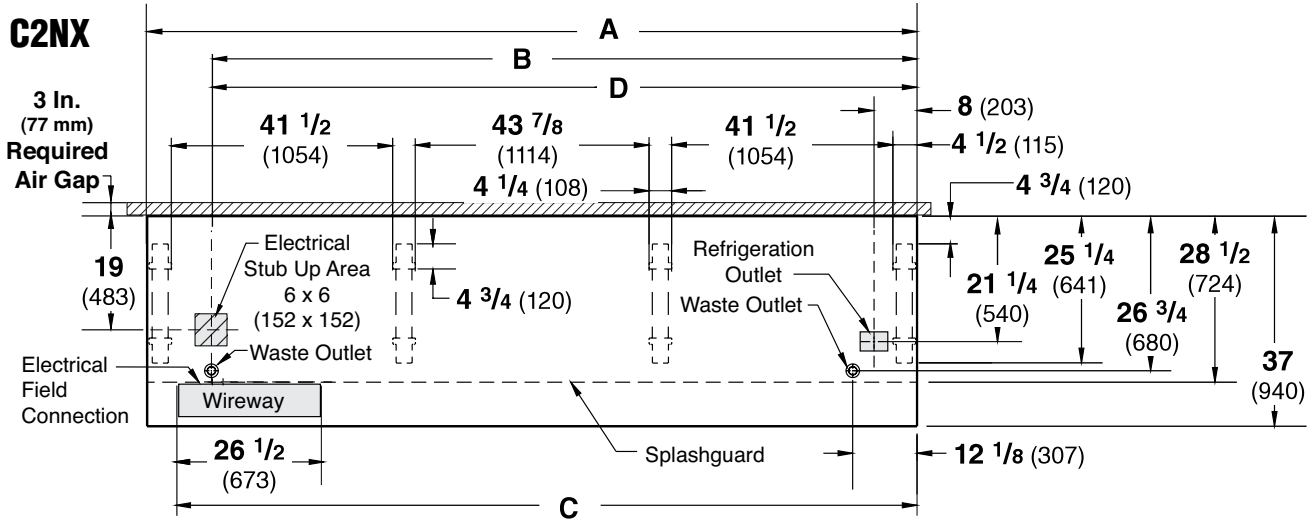01-2005

Dimensions shown as inches and (mm).



**NOTE: Case-to-Case Electrical Connections are made IN FRONT OF SPLASHGUARD.**


	6 ft	8 ft	10 ft	12 ft
<b>General</b>				
<b>(A) Case Length</b> ( <i>without ends or partitions</i> ) <i>(Each end and insulated partition adds 1 1/2 in. (38 mm) to case line up.)</i>	72 3/8 (1838)	96 3/8 (2448)	120 1/2 (3061)	144 1/2 (3670)
Maximum O/S dimension of case back to front <i>(includes bumper)</i>	37 (940)	37 (940)	37 (940)	37 (940)
Back of case to front of splashguard	28 1/2 (724)	28 1/2 (724)	28 1/2 (724)	28 1/2 (724)
Back of case to O/S edge of front leg	25 1/4 (641)	25 1/4 (641)	25 1/4 (641)	25 1/4 (641)
Distance between edges of external legs and center legs	29 1/2 (750)	41 1/2 (1054)	29 1/2 (749)	41 1/2 (1054)
Distance between edges of center legs	NA	NA	43 7/8 (1114)	43 7/8 (1114)
Distance between front legs and splashguard	2 3/4 (70)	2 3/4 (70)	2 3/4 (70)	2 3/4 (70)
<b>Electrical Service</b>  ( <i>Electrical Field Wiring connection point</i> )				
<b>(B) RH End of case to center of stub up area</b>	60 1/4 (1530)	84 1/4 (2140)	108 1/4 (2750)	132 3/8 (3363)
Back of case to center of stub up area	19 (483)	19 (483)	19 (483)	19 (483)
Length of electrical wireway 	26 1/2 (673)	26 1/2 (673)	26 1/2 (673)	26 1/2 (673)
<b>(C) RH End of case to LH end of wireway</b>	66 1/8 (1680)	90 1/8 (2289)	114 1/4 (2902)	138 1/4 (3511)
<b>Waste Outlets</b> ( <i>One each end</i> ) 				
<b>(D) RH End of case to the center of LH waste outlet</b>	60 1/4 (1530)	84 1/4 (2140)	108 1/4 (2750)	132 3/8 (3363)
RH End of case to the center of RH waste outlet	12 1/8 (307)	12 1/8 (307)	12 1/8 (307)	12 1/8 (307)
Back O/S of case to center of waste outlets	26 3/4 (680)	26 3/4 (680)	26 3/4 (680)	26 3/4 (680)
Schedule 40 PVC drip pipe	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)
<b>Refrigeration Outlet</b> 				
Back of case to center of refrigeration outlet	21 1/4 (540)	21 1/4 (540)	21 1/4 (540)	21 1/4 (540)
RH end of case to center of refrigeration outlet	8 (203)	8 (203)	8 (203)	8 (203)

Multi-deck, 4 Display Levels, Low Front, 55 In. Back, Narrow Footprint



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

Dimensions shown as inches and (mm).

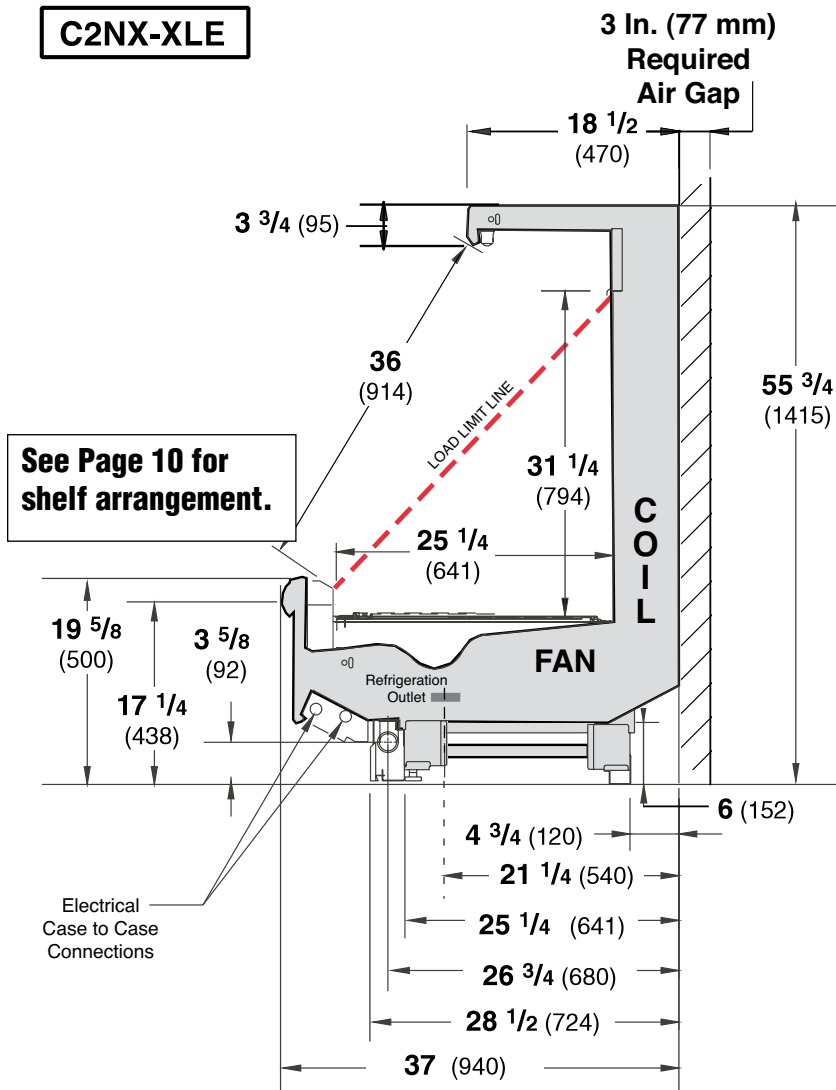

### NSF Certification

This merchandiser model is manufactured to meet nsf/ANSI (National Sanitation Foundation) Standard #7 requirements for construction, materials & cleanability.

Estimated Charge **		C2NX-XLE	
6 ft	1.6 lb	26 oz	0.7 kg
8 ft	2.3 lb	37 oz	1.0 kg
10 ft	2.8 lb	45 oz	1.3 kg
12 ft	3.3 lb	53 oz	1.5 kg

\*\*This is an average for all refrigerant types. Actual refrigerant charge may vary by approximately half a pound (8 oz/0.2 kg).

## Excel C2NX-XLE

### Dairy/Delicatessen

### Precut & Packaged Produce

#### REFRIGERATION DATA

Note: This data is based on store temperature and humidity that does not exceed 75°F and 55% R.H.

	C2NX-XLE§
Discharge Air °F	29
Evaporator °F	21
Unit Sizing °F	19

§ Average evaporator temperature shown. Use dew point for high glide refrigerants for unit sizing. Care should be taken to use the dew point in PT tables for measuring and adjusting superheat. Adjust evaporator pressure as needed to maintain discharge air temperature shown.

#### Btu/hr/ft — Unlit Shelves ‡

C2NX-XLE	Parallel	Conventional
4ft/8ft/12ft	1039	1114
6ft	1042	1117

‡ Add 10 Btu/hr/ft per shelf row for LED fixtures. Add 20 Btu/hr/ft per shelf row for fluorescent lamps.

#### DEFROST DATA

	C2NX-XLE
Frequency (hr)	6
Defrost Water (lb/ft/day)	7
(±15% based on case configuration and product loading.)	
OFFTIME	C2NX-XLE
Temp Term °F	48°F
Failsafe Minutes	30

ELECTRIC OR GAS Not Recommended

#### Standard Defrost Thermostat

Close on rise: close 48°F – open 33°F

#### CONVENTIONAL CONTROLS

##### Low Pressure Backup Control

	C2NX-XLE
CI/CO*	14°F / 4°F

##### Indoor Unit Only, Pressure Defrost

Termination\* 48°F

\*Use a Temperature Pressure Chart to determine PSIG conversions.

**Excel C2NX-XLE****Dairy/Delicatessen****Precut & Packaged Produce****Electrical Data**

	6 ft	8 ft	10 ft	12 ft				
Number of Fans—7W	—	2	1	3				
Number of Fans—4W	2	—	2	—				
	Amperes				Watts			
Evaporator Fan	6 ft	8 ft	10 ft	12 ft	6 ft	8 ft	10 ft	12 ft
120V 50/60Hz Standard Energy Efficient	0.24	0.38	0.43	0.57	16	28	30	42
230V 50/60Hz Standard Energy Efficient	0.12	0.20	0.22	0.30	16	28	30	42
230V 60Hz Export	0.30	0.50	0.55	0.75	48	78	87	117
230V 50Hz Export	0.36	0.56	0.64	0.84	54	84	96	126
Minimum Circuit Ampacity †								
120V 50/60Hz Standard Energy Efficient	0.44	0.58	0.63	0.77				
230V 50/60Hz Standard Energy Efficient	0.32	0.40	0.42	0.50				
230V 60Hz Export	0.50	0.70	0.75	0.95				
230V 50Hz Export	0.56	0.76	0.84	1.04				
Maximum Over Current Protection 120V	20	20	20	20				
Maximum Over Current Protection 230V	15	15	15	15				
Anti-sweat Heaters								
120V 50/60Hz Standard	0.15	0.20	0.25	0.30	18	24	30	36
Standard Lighting (T-8 Fluorescent)								
1 Row Canopy	0.51	0.51	0.77	0.77	59	59	85	85
<b>ONLY LIGHTING CONFIGURATIONS THAT ARE COMPLIANT WITH THE U.S. DEPT. OF ENERGY (DOE) 2017 REGULATION ARE AVAILABLE FOR SALE FOR USE IN THE U.S.A.</b>								
Optional Lighting (T-8 Fluorescent)								
Additional 1 Row Canopy	0.51	0.51	0.77	0.77	59	59	85	85
1 Row Rail Light	0.51	0.51	0.77	0.77	59	59	85	85
3 Rows of Shelves	1.53	1.53	2.31	2.31	177	177	255	255
Canopy								
1 Row Canopy	0.35	0.46	—	0.70	41.4	55.6	—	83.4
1 Row Canopy — HO	0.42	0.56	—	0.84	50.5	67.2	—	100.8
Rail Light —1 Row	0.13	0.17	—	0.26	15.3	20.5	—	30.7
Shelf								
2 Rows of Shelves	0.26	0.34	—	0.51	30.7	40.9	—	61.4
3 Rows of Shelves	0.38	0.51	—	0.77	46.0	61.4	—	92.1

120V Fluorescent Lighting Circuit Total = Standard Lighting + Total Optional Lighting + Optional Shelf Lighting

120V LED Lighting Circuit Total = Canopy Lighting + Shelf Lighting + Optional Rail Lighting

230V Lighting Circuit Total = Multiply 120V Lighting Circuit Total by 0.52

† MCA does not include Canopy A/S Heaters because heaters are wired separately from fans.

Please note: some combinations of fluorescent lights on this case model may not be compliant with DOE 2017 and may not be available to order in the US and Canada. More lighting options are available with LED lights. The Hussmann Product Configurator will not allow lighting options that do not comply with the DOE 2017 standards.

**Excel C2NX-XLE**  
**Dairy/Delicatessen**  
**Precut & Packaged Produce**

**Product Data**

<i>Recommended Usable Cube</i> <sup>1</sup> (Cu Ft/Ft)	3.72 ft <sup>3</sup> /ft (0.35 m <sup>3</sup> /m)
<i>AHRI Total Display Area</i> <sup>2</sup> (Sq Ft/Ft)	3.02 ft <sup>2</sup> /ft (0.92 m <sup>2</sup> /m)
<i>Shelf Area</i> <sup>3</sup> (Sq Ft/Ft)	4.29 ft <sup>2</sup> /ft (1.31 m <sup>2</sup> /m)

- <sup>1</sup> AHRI Refrigerated Volume less shelving and other unusable space: Refrigerated Volume/Unit of Length, ft<sup>3</sup>/ft [m<sup>3</sup>/m]
- <sup>2</sup> Computed using AHRI 1200 standard methodology: Total Display Area, ft<sup>2</sup> [m<sup>2</sup>]/Unit of Length, ft [m]
- <sup>3</sup> Shelf surface area is composed of bottom deck plus standard shelf complement, as shown in the Hussmann *Product Reference Guide*. The standard shelf complement for this model is (1) row of 12-inch shelves and (1) row of 14-inch shelves.


<b>ESTIMATED SHIPPING WEIGHT <sup>4</sup></b>					
<b>Case</b>	<i>6 ft</i>	<i>8 ft</i>	<i>10 ft</i>	<i>12 ft</i>	<b>Solid End</b>
<b>lb (kg)</b>					<i>(each)</i>
	800 (363)	1000 (454)	1100 (499)	1200 (544)	75 (34)

<sup>4</sup> Actual weights will vary according to optional kits included.


# Fan Wiring Offtime Defrost

1, 2 & 3 Fans


6 ft – 2 Fans  
8 ft – 2 Fans  
10 ft – 3 Fans  
12 ft – 3 Fans

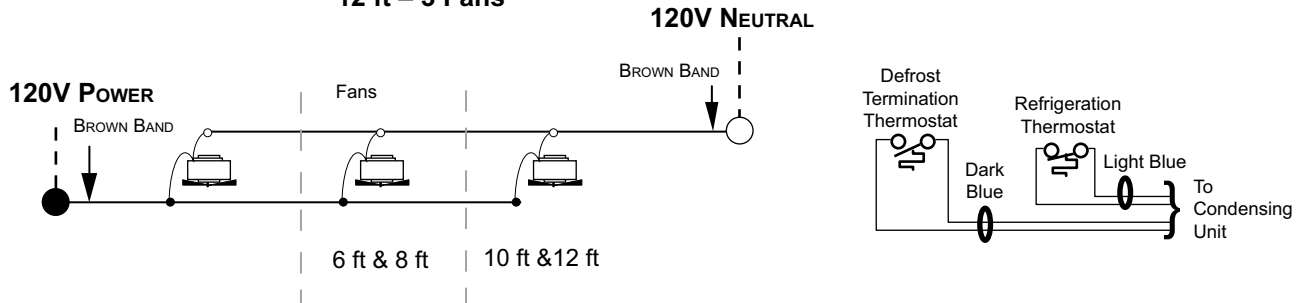

# Canopy Light Circuits — Fluorescent Fixtures

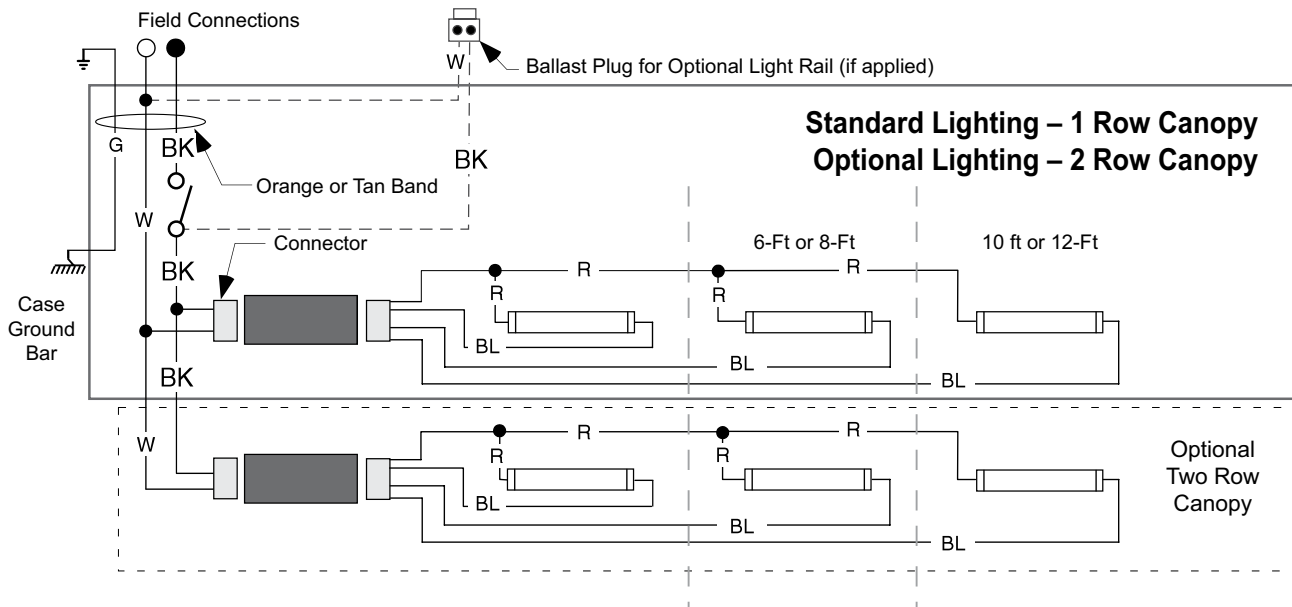

## Optional Lighting – 1 Row Rail

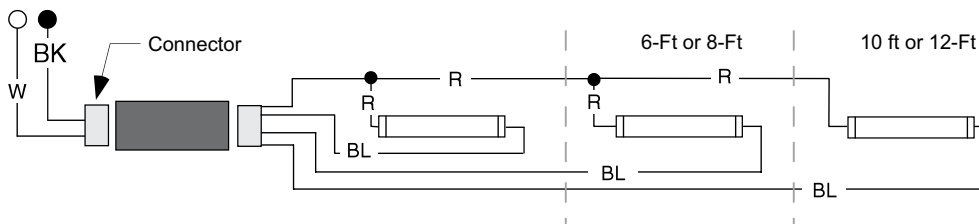


## WARNING

All components must have mechanical ground, and the merchandiser must be grounded.


R = Red    Y = Yellow    G = Green    BL = Blue    BK = Black    W = White  
 ● = 120V POWER    ○ = 120V NEUTRAL    ⚡ = FIELD GROUND    ⚡⚡ = CASE GROUND

# Canopy Anti-Sweat Heater

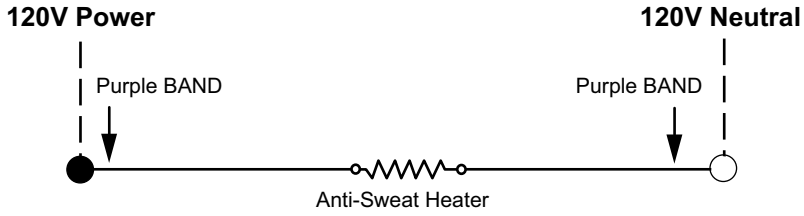

# Optional Shelf Lighting Fluorescent Fixtures

## Optional Shelf Harness and Light Circuits for Two or Three Rows of Shelves

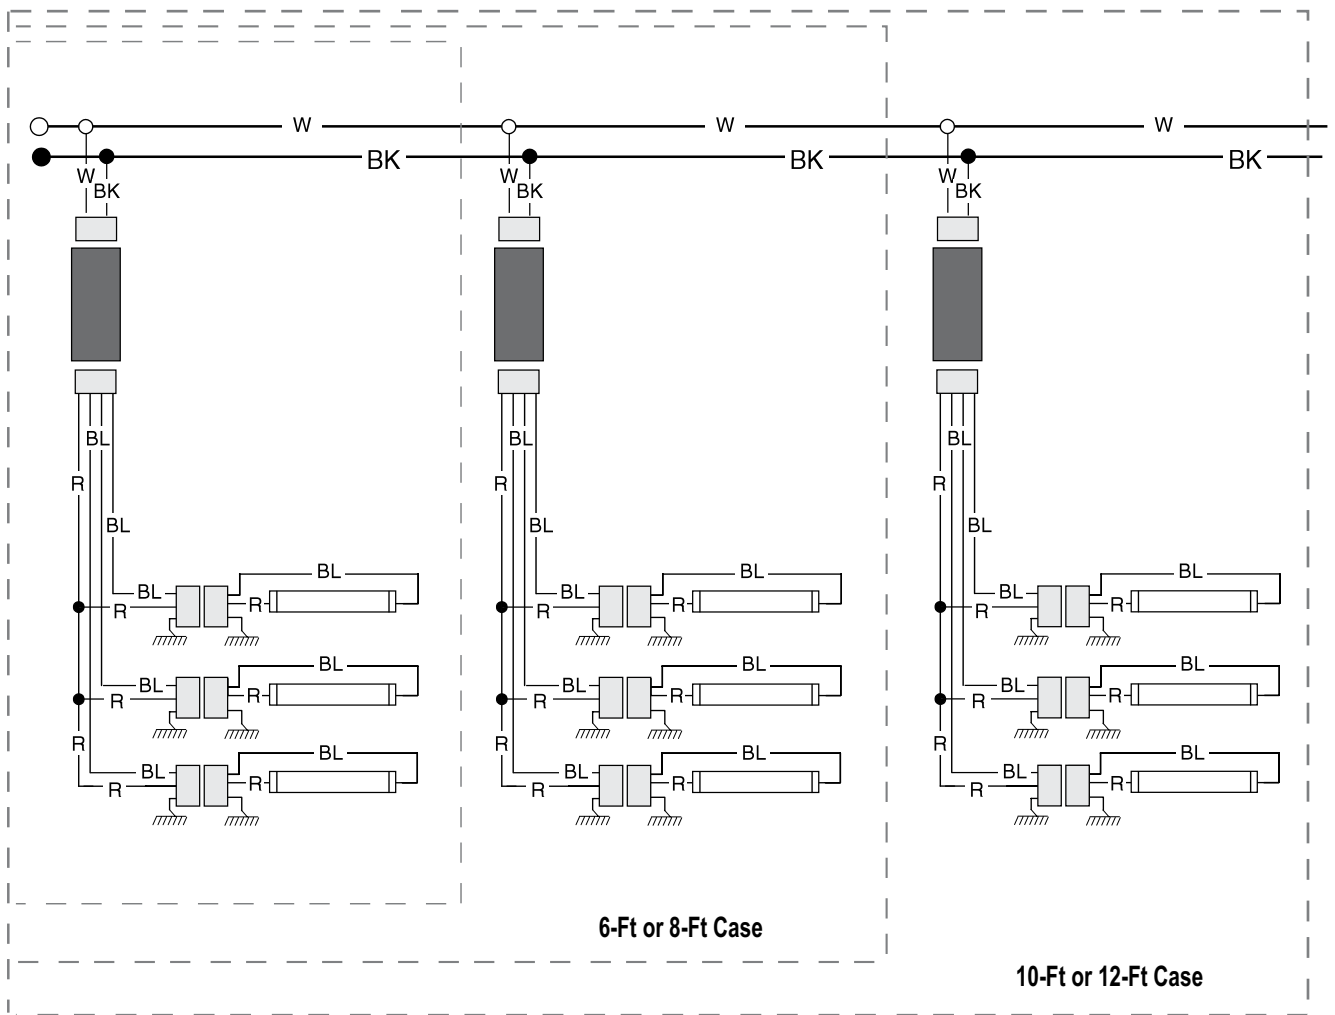

### WARNING



All components must have mechanical ground, and the merchandiser must be grounded.

R = Red    Y = Yellow    G = Green    BL = Blue    BK = Black    W = White



● = 120V POWER    ○ = 120V NEUTRAL    ⊥ = FIELD GROUND    ≡ = CASE GROUND

# Optional Canopy and Rail Light Circuits — LED Fixtures

## LED Canopy Lighting – 1 Row

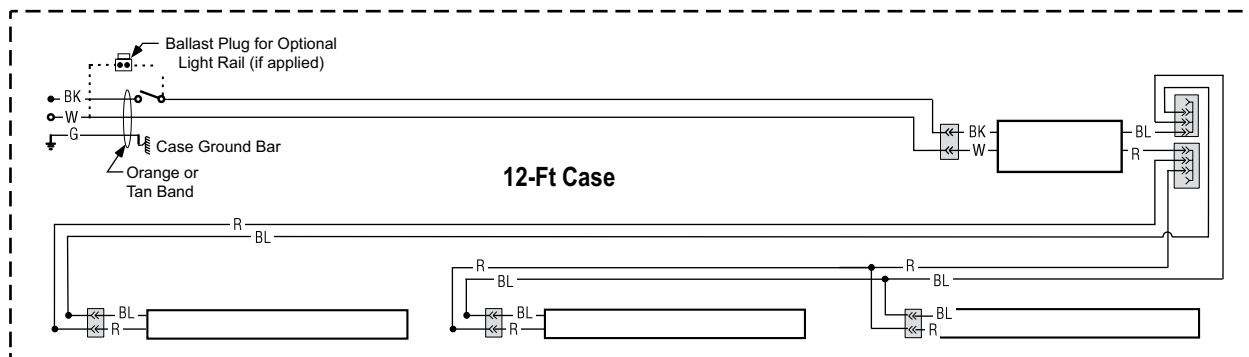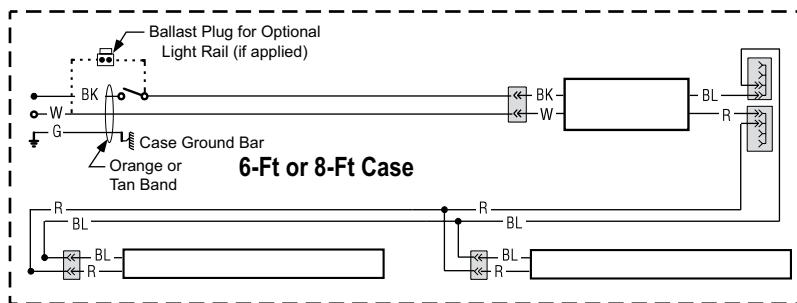

## LED Rail Lighting – 1 Row

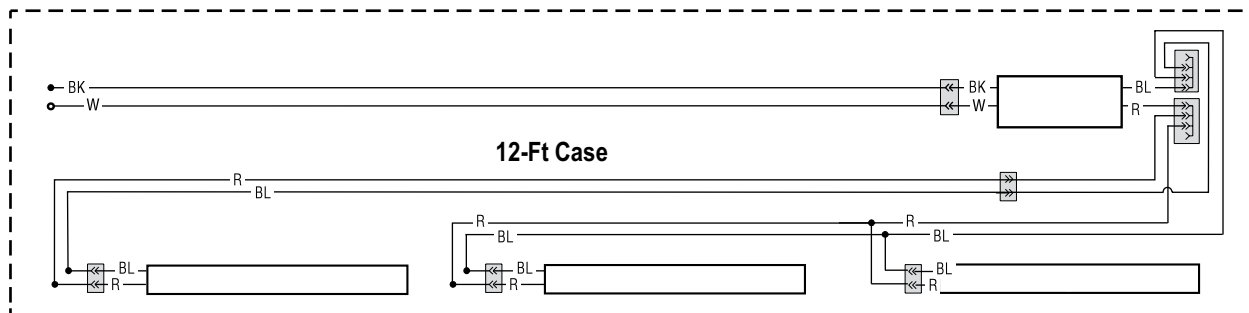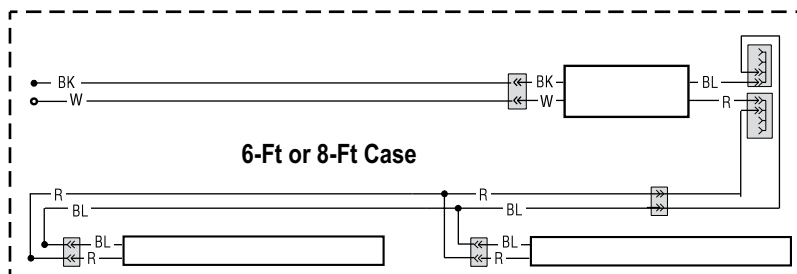

### WARNING


All components must have mechanical ground, and the merchandiser must be grounded.

R = Red    Y = Yellow    G = Green    BL = Blue    BK = Black    W = White  
 ● = 120V POWER    ○ = 120V NEUTRAL    ⚡ = FIELD GROUND    ⏏ = CASE GROUND



# Optional Shelf Lighting LED Fixtures

## Optional Shelf Harness and LED Light Circuits for 2 or 3 Rows of Shelves

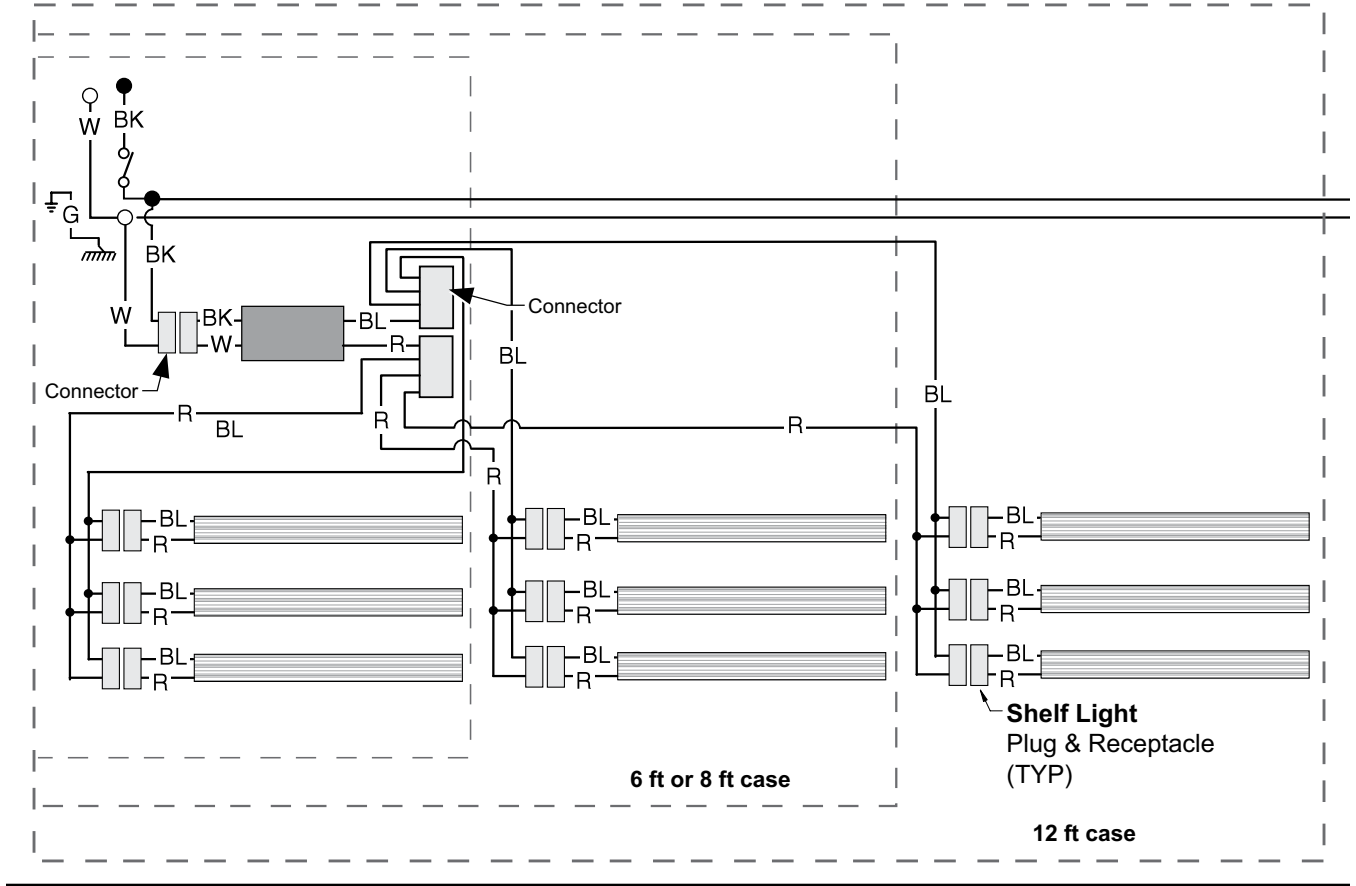

### WARNING

All components must have mechanical ground, and the merchandiser must be grounded.

R = Red      G = Green      BL = Blue      BK = Black      W = White  
 ● = 80V POWER      ○ = 80V NEUTRAL      ⊥ = FIELD GROUND       $\overline{\overline{\overline{\quad}}}$  = CASE GROUND

# Excel **C2NX-XLE**

Dairy/Delicatessen

Precut & Packaged Produce

## SHELF CONFIGURATION


This merchandiser is designed for two or three shelves.

The depth of the shelf used in the top eight (8) shelf hole locations is critical to case performance.

If a shelf is placed in one of the top eight (8) locations it must comply with the angle/depth requirements listed below.

<b>Shelf Angle</b>	<b>Maximum Shelf Depth</b>
0°	12 in.
15°	14 in. or less
30°	18 in. or less
45°	18 in. or less

**NOTE:** Shelves placed in the lower positions may be up to 18 in. deep when positioned at a 0° angle.

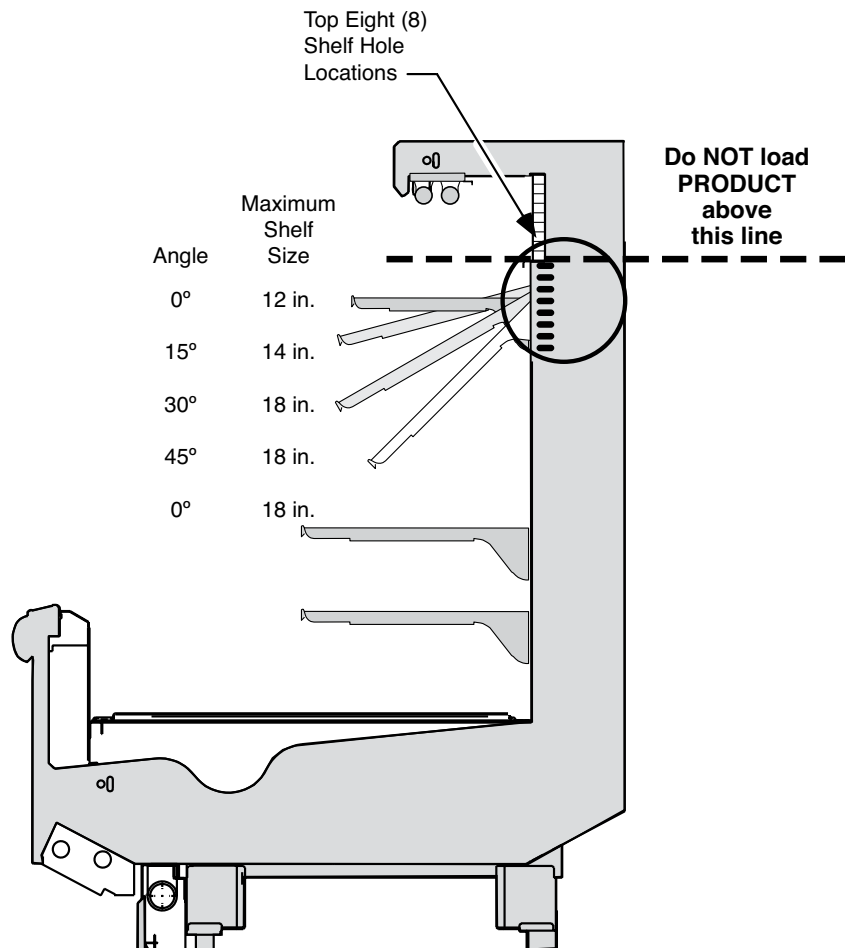



**Excel C2NX-XLE**  
**Dairy/Delicatessen**  
**Precut & Packaged Produce**

The ballast for the canopy and shelf lamps is located behind the canopy on the left-hand end (when facing case) of the merchandiser.

To access the ballast:

1. Remove screws at bottom edge of canopy and rear of light channel.
2. Lower light channel which will pivot on hinge.
3. Service or replace ballasts as required.
4. Reassemble items as they were originally installed.

**NOTE:** Rail lamp ballast is located in the electrical raceway.

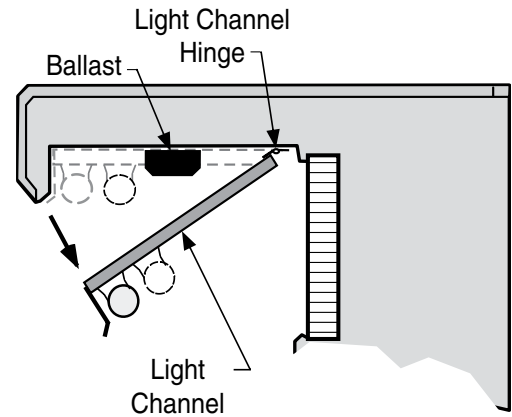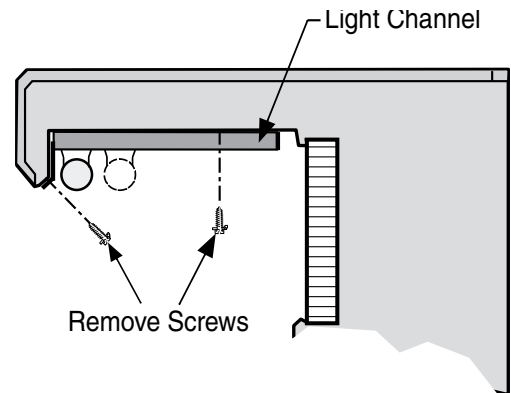

**CANOPY ANTI-SWEAT HEATER**

The canopy anti-sweat heater location is shown below. Connections are in the electrical wireway.

