

HUSSMANN®

microDS™

RL-SP


INNOVATOR Doors or
INNOVATOR III Doors
Self-Contained
R-290 (Propane)

Merchandise Data Sheet

P/N 0530354_E


UL EPH® Certified

November 2020

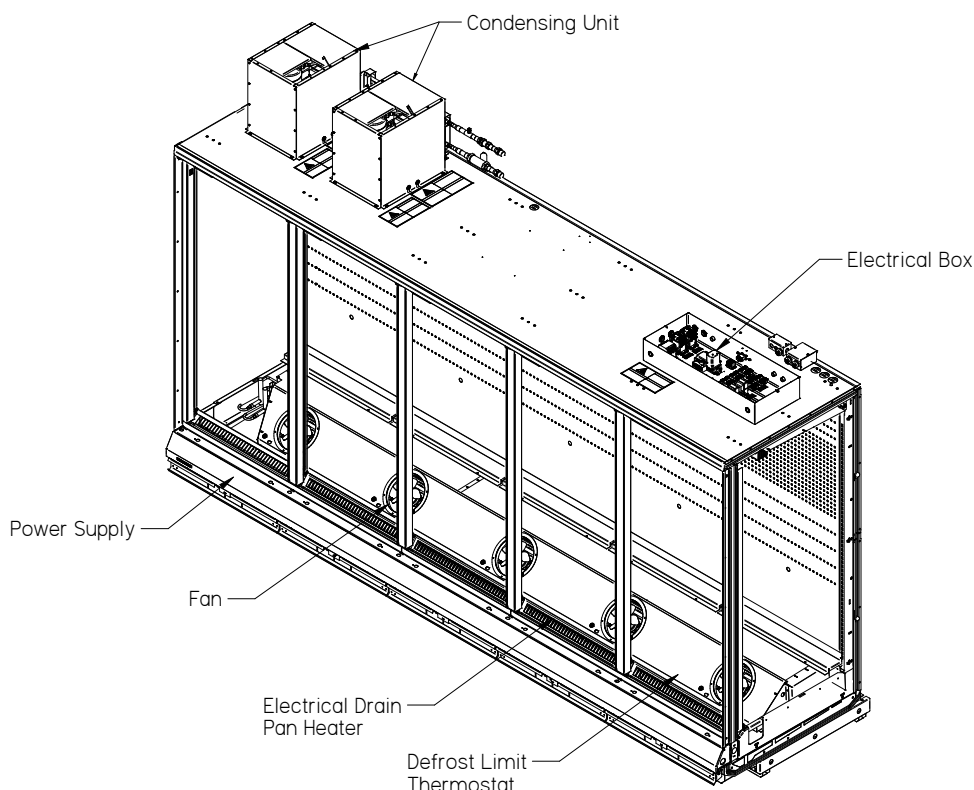

Portion of parts removed for clarity.

5-door merchandiser shown.



UL EPH Certification

This merchandiser model is manufactured to meet ANSI/SCC Standards requirements for construction, materials, and cleanability.

Performance Data	Page 2	Estimated Shipping Weights	Page 6
Product Data (AHRI Statistics)	Page 2	Shelf Options	Page 6
Cross Section	Page 3	Wiring Diagrams	Page 7
Plan View	Page 4	Top Views	Page 11
Electrical Loads	Page 5	Revision History	Page 13

Data sheet-RL-SP

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

RL-SP

With INNOVATOR or INNOVATOR III Doors
Low Temperature

Refrigeration Data ¹

RL-SP		Optimal Shelf Life	
Application		Frozen Food (FF)	Ice Cream (IC)
Temperature	Discharge Air °F (°C)	-3 (-19.5)	-10 (-23)

Notes:

1. All data based on store temperature and humidity that does not exceed NSF Type 1 ambient conditions of 75°F and 55% relative humidity, except where noted.
2. Water supply design conditions are 50 to 80°F (10 to 27°C).

Compressor Data

Total Heat of Rejection	BTU/Hr
2 Dr	4,442
3 Dr	5,527
4 Dr	8,885
5 Dr	9,970

Cooling Water Pressure Drop

Auto-Balancing Valve requires a minimum of 2 PSI to operate. Subtract 2 PSI if the Auto-Balancing Valve is not supplied.

	PSI
2 Dr	2.5
3 Dr	2.5
4 Dr	2.5
5 Dr	3.5

Glycol/Water Flow Rate ⁴

	GPM	LPM
2 Door	1.5	5.7
3 Door	2.0	7.6
4 Door	2.5	9.5
5 Door	3.0	11.4

⁴ Use a pre-mixed inhibited glycol solution. If the mixing is to be done on site, use only distilled or de-ionized water (do not use city water).

Defrost Data

Frequency (hours between defrost) 24

	RL-SP
Time (minutes)	45
Temp Termination (°F)	48

ELECTRIC OR GAS Electric

Defrost Water ³ 1.2 lb/dr/day
(0.5 kg/m)

³ (± 15% based on case configuration and product loading).

Charge ⁵

2 Door	0.27 lb	4.4 oz	125 g
3 Door	0.33 lb	5.3 oz	150 g
4 Door ⁶	0.27 lb	4.4 oz	125 g
5 Door ⁶	0.33 lb	5.3 oz	150 g

⁵ Maximum charge per condensing unit = 150 g.

⁶ 2 condensing units per case

Product Data

Gross Refrigerated Volume ⁷ (Cu Ft/Dr)	23.46 ft ³ /dr (0.66 m ³ /m)
AHRI Total Display Area ⁸ (Sq Ft/Dr)	13.31 ft ² /dr (1.24 m ² /m)
Shelf Area ⁹ (Sq Ft/Dr)	29.32 ft ² /dr (2.72 m ² /m)

⁷ AHRI Gross Refrigerated Volume: Refrigerated Volume/Unit of Length, ft³/dr [m³/m]

⁸ Computed using AHRI 1200 standard methodology: Total Display Area, ft² [m²]/Unit of Length, ft [m]

⁹ Shelf surface area is composed of bottom deck plus standard shelf complement for this model: (5) 22-inch shelves, evenly distributed vertically.

Reach-in Multideck Merchandiser, 6 Display Levels,
Low Bottom, Self-Contained R290 (Propane)

RL-SP
With INNOVATOR or INNOVATOR III Doors
Low Temperature

DOE 2017
Energy Efficiency
Compliant


Husmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

Dimensions shown as in. and (mm).

Shelf complement shown as tested:

Five rows of shelves (22-in) spaced equally between bottom display pan and interior top panel.

4-in. between back to back cases.

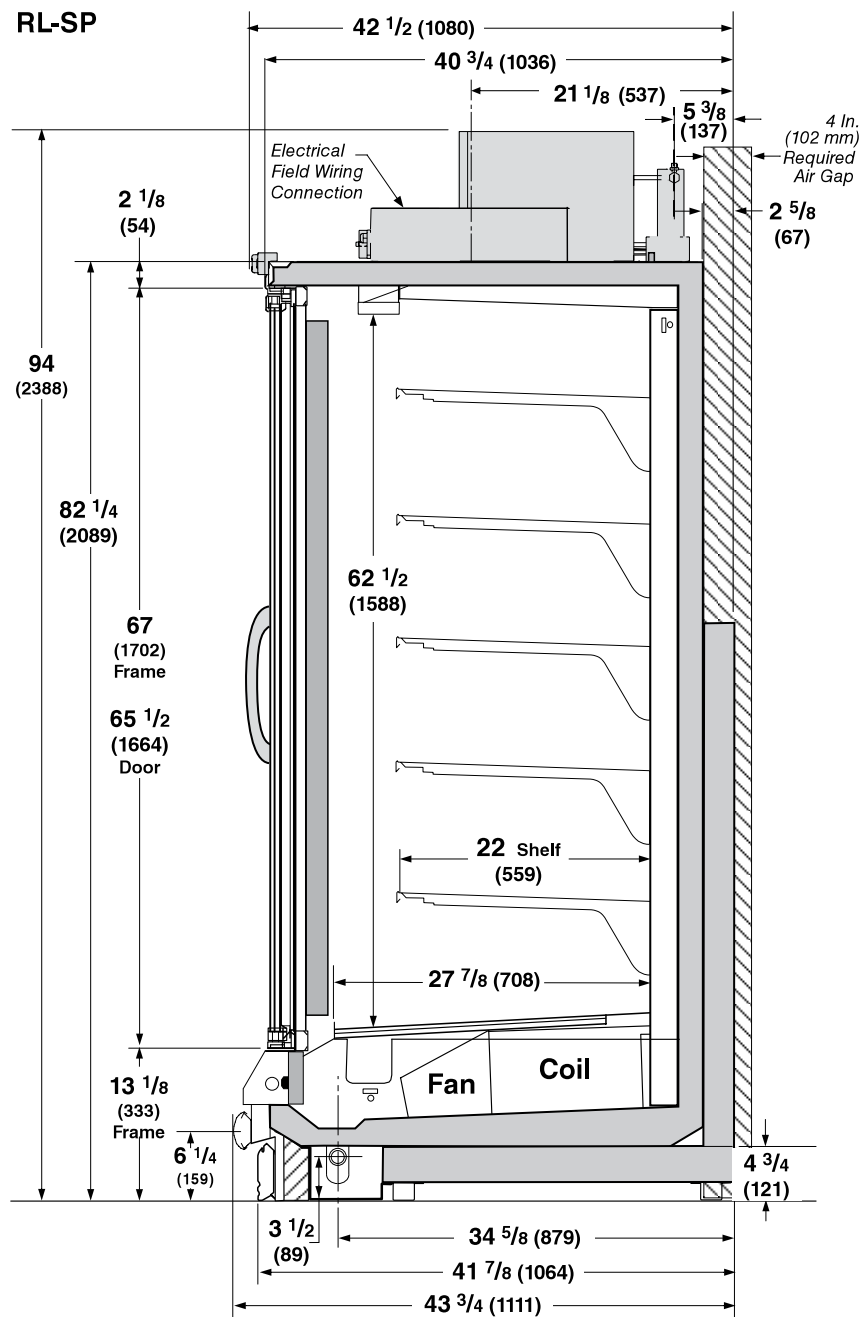


UL EPH Certification

This merchandiser model is manufactured to meet ANSI/SCC Standards requirements for construction, materials, and cleanability.

Engineering Plan View

RL-SP
2, 3, 4 & 5 Door

Dimensions shown as in. and (mm).

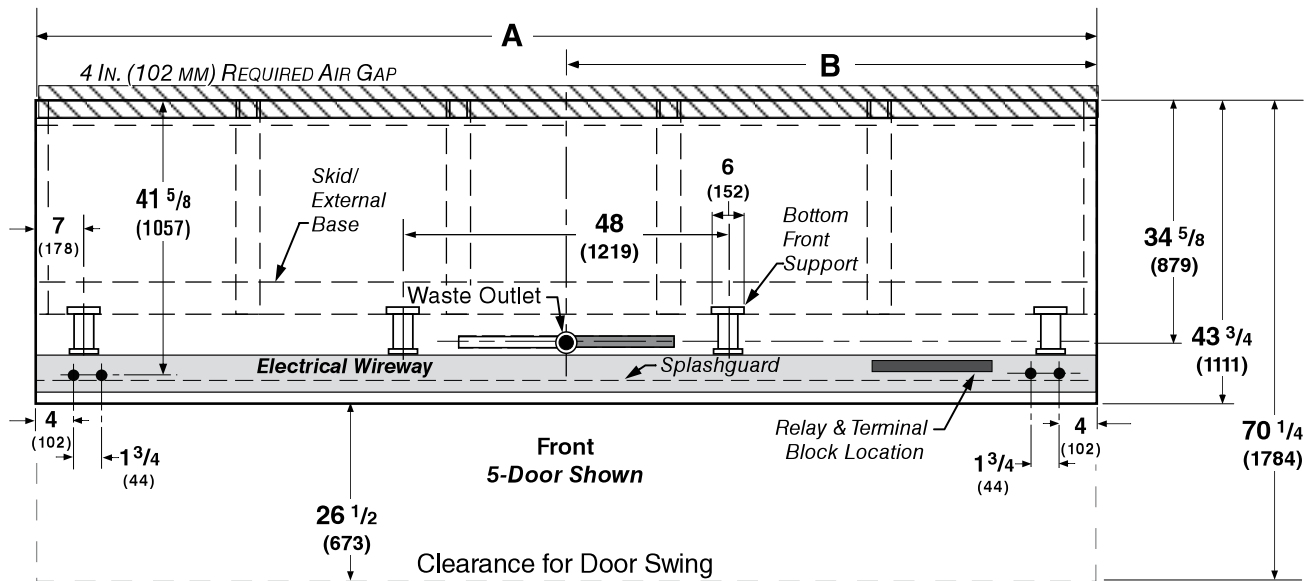

(5 Door Model shown above)

	2 Dr	3 Dr	4 Dr	5 Dr
General				
(A) Case Length (without ends or partitions) Each end and insulated partition adds 2 in. (51 mm) to case line up; each window end or insulated partition adds 1 1/2 in. (38 mm).	62 (1575)	92 1/2 (2350)	122 7/8 (3121)	153 3/8 (3896)
Maximum O/S dimension of case back to front (includes bumper) (Add 26 1/2 in (673 mm) for door swing.)	43 3/4 (1111)	43 3/4 (1111)	43 3/4 (1111)	43 3/4 (1111)
Back of case to rear of splashguard	39 7/8 (1013)	39 7/8 (1013)	39 7/8 (1013)	39 7/8 (1013)
Width of Skidrail	3 3/4 (95)	3 3/4 (95)	3 3/4 (95)	3 3/4 (95)
Width of Bottom Front Support	6 (152)	6 (152)	6 (152)	6 (152)
Stub-up area between front support and splashguard	3 1/8 (79)	3 1/8 (79)	3 1/8 (79)	3 1/8 (79)
Electrical Service (Field Electrical Wiring Connection)				
RH End of case to center of Electrical Wiring Connection (top of case)	13 3/4 (349)	13 3/4 (349)	13 3/4 (349)	13 3/4 (349)
Back outside of case to center of Electrical Wiring Connection	5 1/2 (140)	5 1/2 (140)	5 1/2 (140)	5 1/2 (140)
Waste Outlets (with required drain extension)				
(B) RH End of case to the center of waste outlet	23 7/8 (606)	54 1/4 (1378)	46 1/4 (1175)	76 5/8 (1946)
Back O/S of case to center of waste outlet	34 5/8 (879)	34 5/8 (879)	34 5/8 (879)	34 5/8 (879)
Schedule 40 PVC drip pipe	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)	1 1/4 (32)
Water Seal				
Edge of water seal to center of waste outlet	13 (330)	13 (330)	13 (330)	13 (330)
**NOTE: Field installed water seal outlets, tees, and connectors are shipped with the case.				

Electrical Data

Number of Fans 8.25-in.			2 dr 2	3 dr 3	4 dr 4	5 dr 5				
			Amperes				Watts			
Evaporator Fan			2 dr	3 dr	4 dr	5 dr	2 dr	3 dr	4 dr	5 dr
120V	50/60Hz		0.60	0.90	1.20	1.50	36	54	72	90
Door Anti-sweat Heaters (on fan circuit)										
120V	50/60Hz	Innovator	1.50	2.30	3.00	3.80	182	273	364	455
120V	50/60Hz	Innovator III	0.90	1.30	1.70	2.20	104	156	208	260
Frame Anti-sweat Heaters (on fan circuit)										
120V	50/60Hz		0.78	1.18	1.57	1.97	94	141	188	236
Condensing Unit (208V/230V, 1 ph, 60 Hz) Standard										
NOTE: One compressor can start at a time.										
Compressor RLA			3.5		3.5		7.0		7.0	
Compressor LRA			25.5/unit		25.5/unit		25.5/unit		25.5/unit	
Merchandise Circuit Requirements (208V/230V, 1 Ph, 60 Hz)										
Total Amps			9.0	13.5	18.0	22.4				
MCA			11.3	17.1	23.3	29.2				
Maximum Over Current Protection			20	20	30	30				
Defrost										
Drain Heaters (120V)			0.63	1.25	2.00	2.57	75	150	240	300
Plenum Heaters (120V)			1.30	1.92	2.60	3.22	156	230	312	386
Electric Defrost (208V)			6.72	10.08	13.46	16.82	1400	2100	2800	3500

ONLY LIGHTING CONFIGURATIONS THAT ARE COMPLIANT WITH THE U.S. DEPT. OF ENERGY (DOE) 2017 REGULATION ARE AVAILABLE FOR SALE FOR USE IN THE U.S.A.

STANDARD LIGHTING	2 Dr	3 Dr	4 Dr	5 Dr	2 Dr	3Dr	4 Dr	5 Dr
120V	0.31	0.46	0.62	0.77	37.1	55.6	74.2	92.7
220V Export	0.17	0.25	0.34	0.42	37.1	55.6	74.2	92.7
OPTIONAL LIGHTING	2 Dr	3 Dr	4 Dr	5 Dr	2 Dr	3Dr	4 Dr	5 Dr
[22 W] 120V	0.36	0.52	0.68	0.84	43.2	62	81	100
[22 W] 220V Export	0.20	0.28	0.37	0.46	43.2	62	81	100
GE Illumination	2 Dr	3 Dr	4 Dr	5 Dr	2 Dr	3Dr	4 Dr	5 Dr
120V	0.30	0.45	0.60	0.75	36	54	72	90
220V Export	0.16	0.25	0.33	0.41	36	54	72	90

RL-SP

With INNOVATOR or INNOVATOR III Doors
Low Temperature

ENDS or PARTITIONS

*Each standard end and each insulated partition
adds 2 in. (38 mm) to case line up.*

ESTIMATED SHIPPING WEIGHT †

Case	2 Dr	3 Dr	4 Dr	5 Dr	Solid End (each)
lb (kg)	1047 (475)	1345 (610)	1595 (769)	1874 (895)	55 (25)

† Actual weights will vary according to optional kits included.

Shelf Options

Approved shelf sizes for standard (horizontal, 2-3 position brackets) displays:

22-inch

24-inch

26-inch

Contact engineering for non-standard display recommendations.

Optimal number of Shelves: 5 per door

Maximum number of Shelves: 5 per door

Standard shelf complement for test purposes: (5 per door) 22-inch shelves, evenly distributed vertically

2,3 Door Wiring Diagram


RL-SP
With INNOVATOR or INNOVATOR III Doors
Low Temperature

—— FACTORY WIRE AWG 14 UNLESS SPECIFIED
—— FACTORY WIRE AWG 12
- - - - FIELD INSTALLED WIRE

WIRE COLOR
BK BLACK
BL BLUE
GN GREEN
RD RED
WT WHITE
YL YELLOW

USE WIRE MARKER AT EACH END OF WIRE AS FOLLOWS:

MBR-----MARKER BROWN FANS
MO-----MARKER ORANGE LIGHTS
MP-----MARKER PURPLE ANTISWEAT
MPI-----MARKER PINK DRAIN PAN HTR

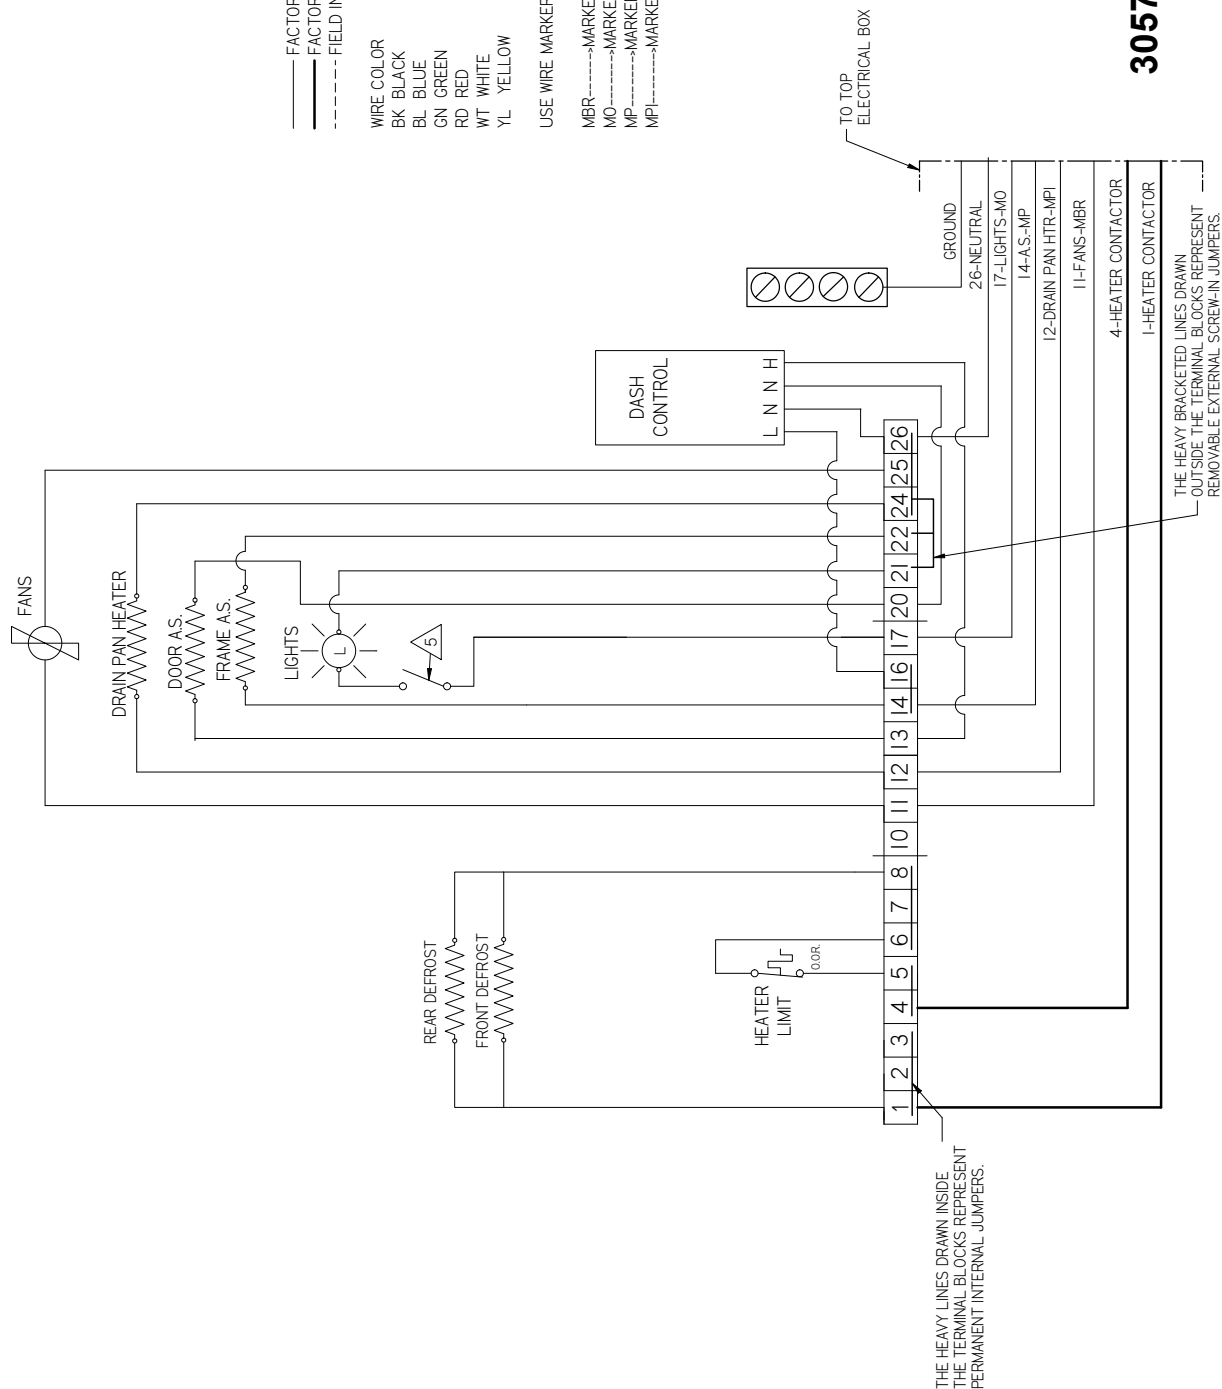


3057745_D

RL-SP

With INNOVATOR or INNOVATOR III Doors
Low Temperature


2-3 Door Corelink Wiring Diagram

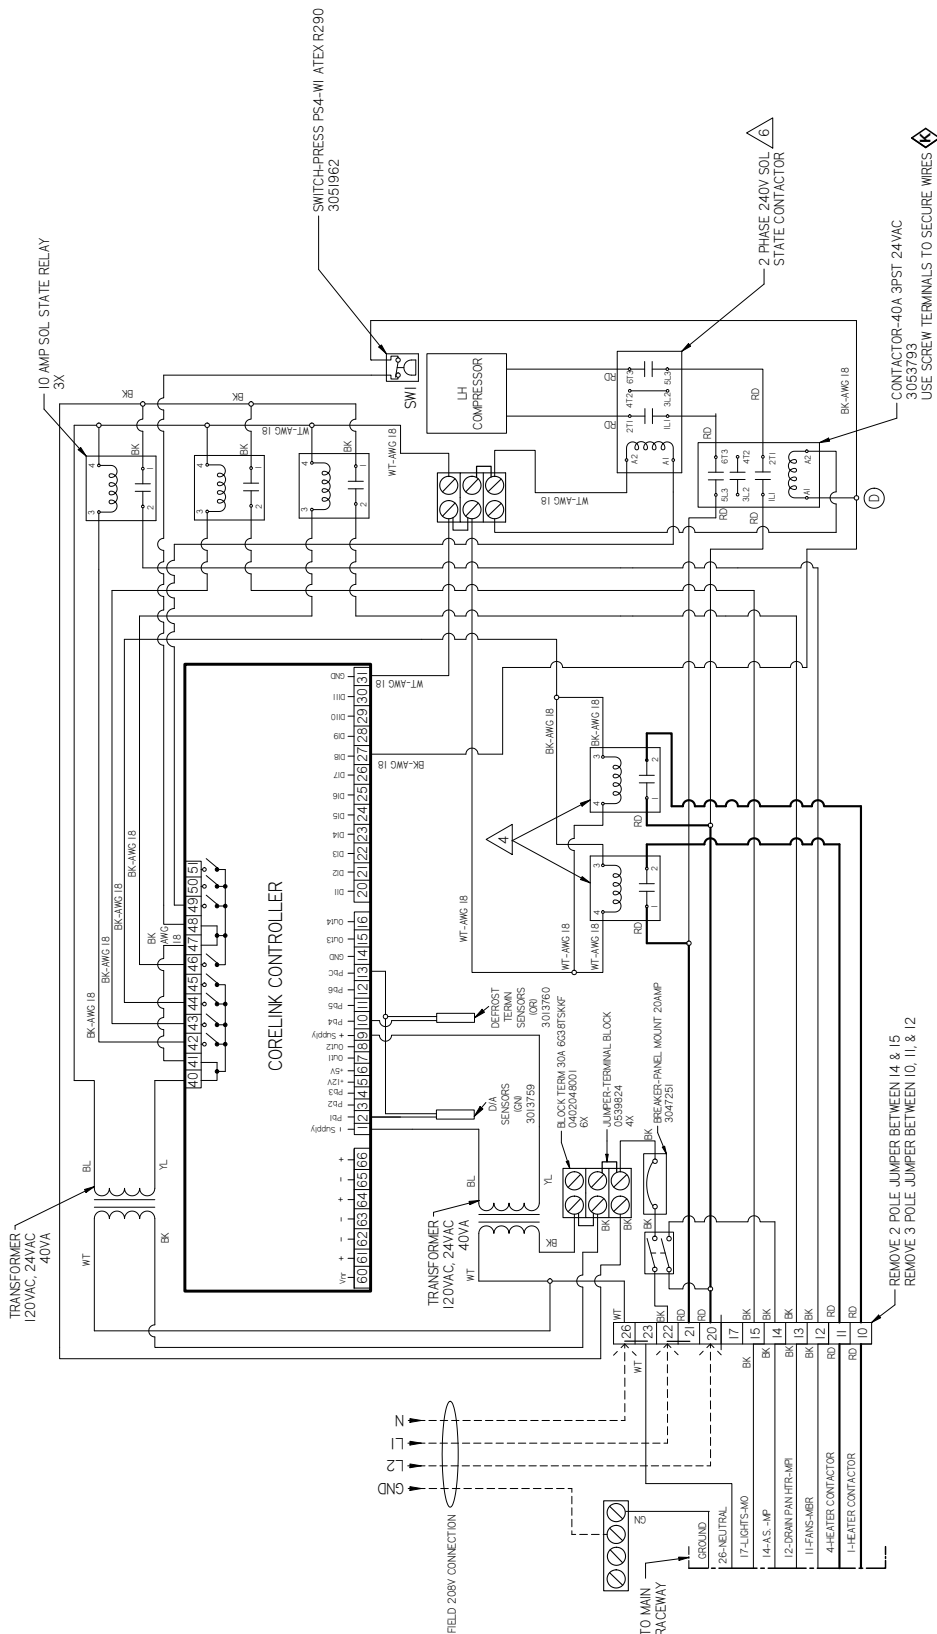

3057745_D

4,5 Door Wiring Diagram


RL-SP
With INNOVATOR or INNOVATOR III Doors
Low Temperature

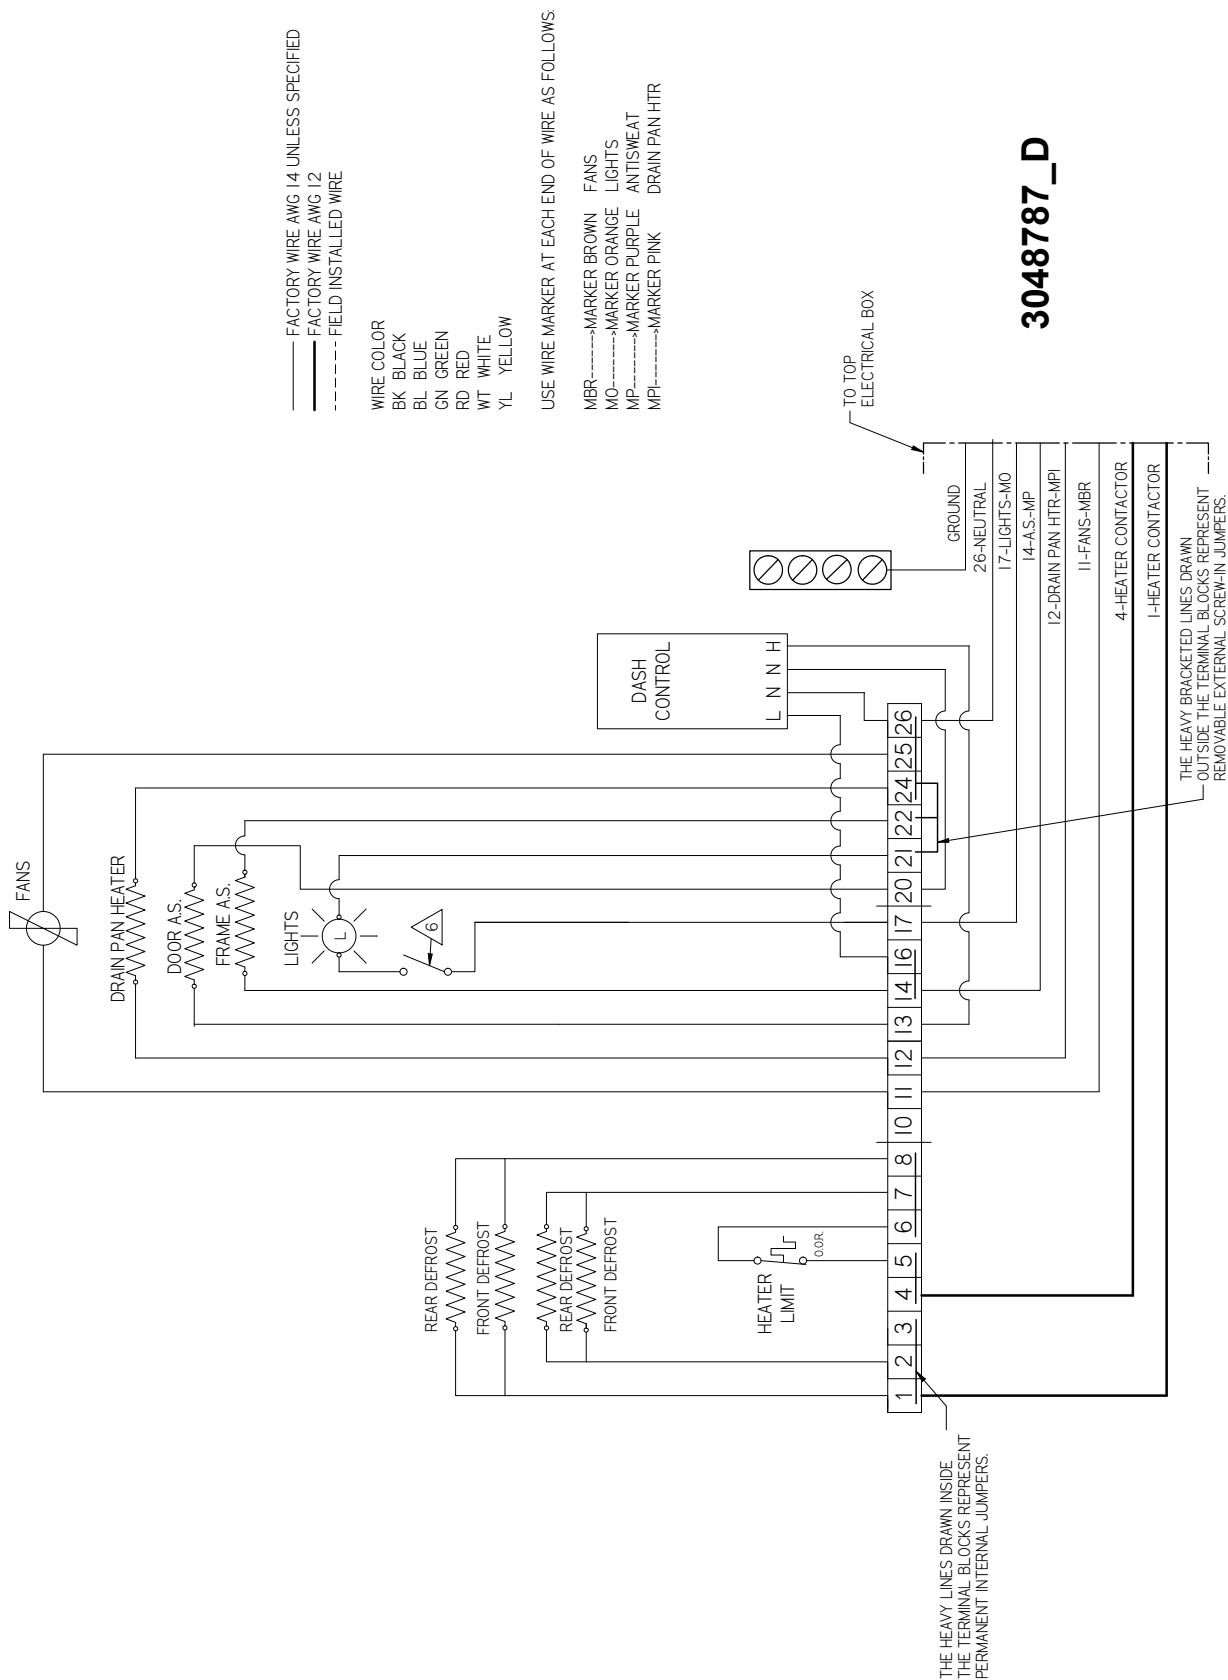

RL-SP

With INNOVATOR or INNOVATOR III Doors
Low Temperature

4,5 Door Corelink Wiring Diagram

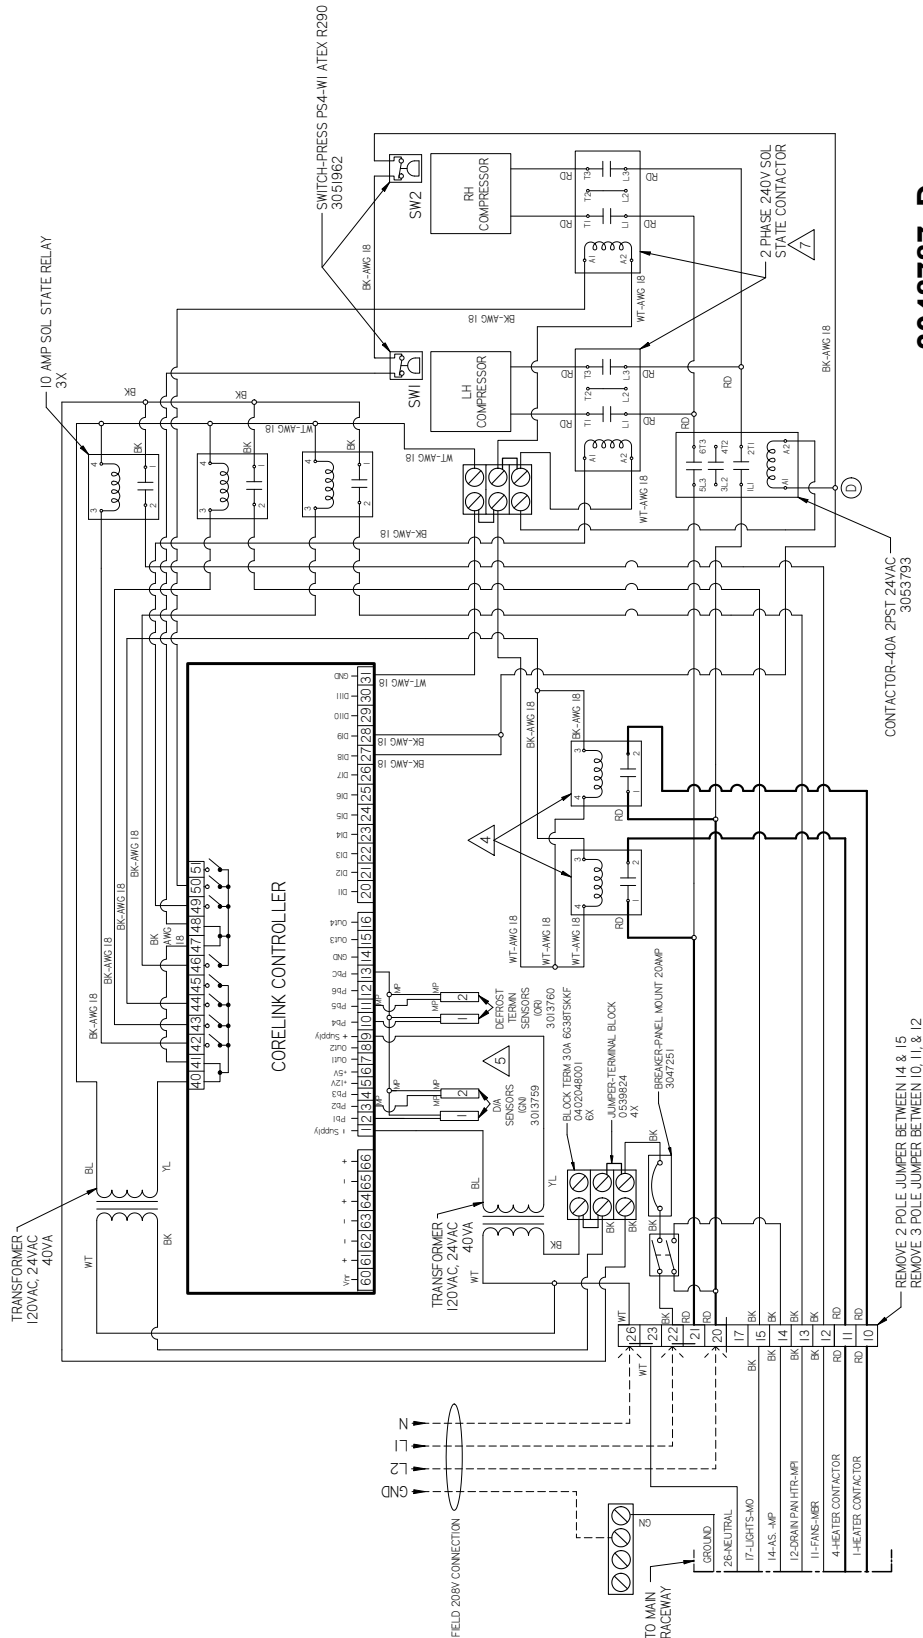


3048787_D


Engineering Plan View

RL-SP
With INNOVATOR or INNOVATOR III Doors
Low Temperature

RL-SP Top Views

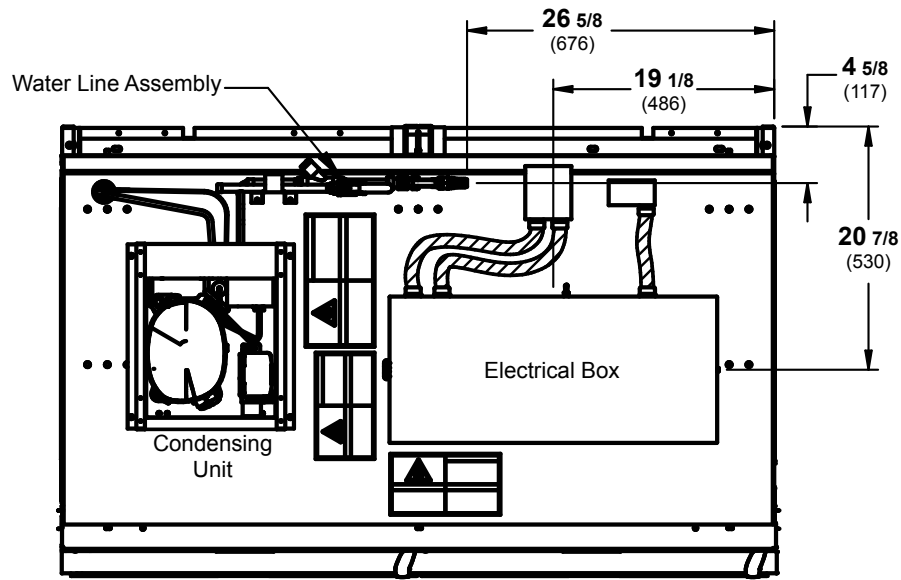

RL2SP Top View

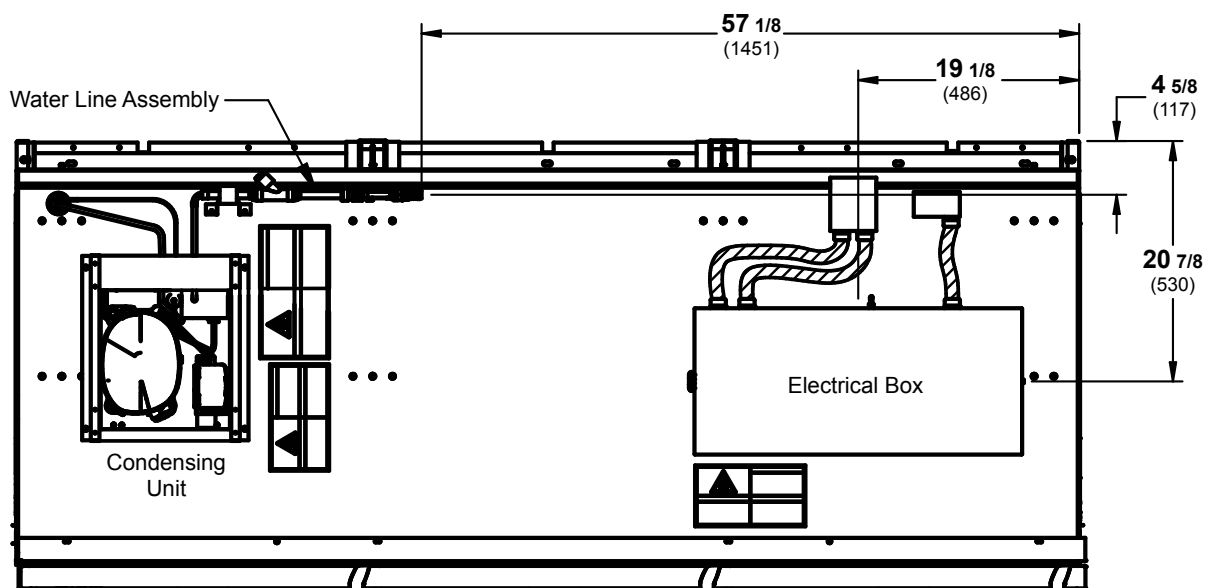


RL3SP Top View

RL-SP


With INNOVATOR or INNOVATOR III Doors
Low Temperature

Engineering Plan View


RL-SP Top Views

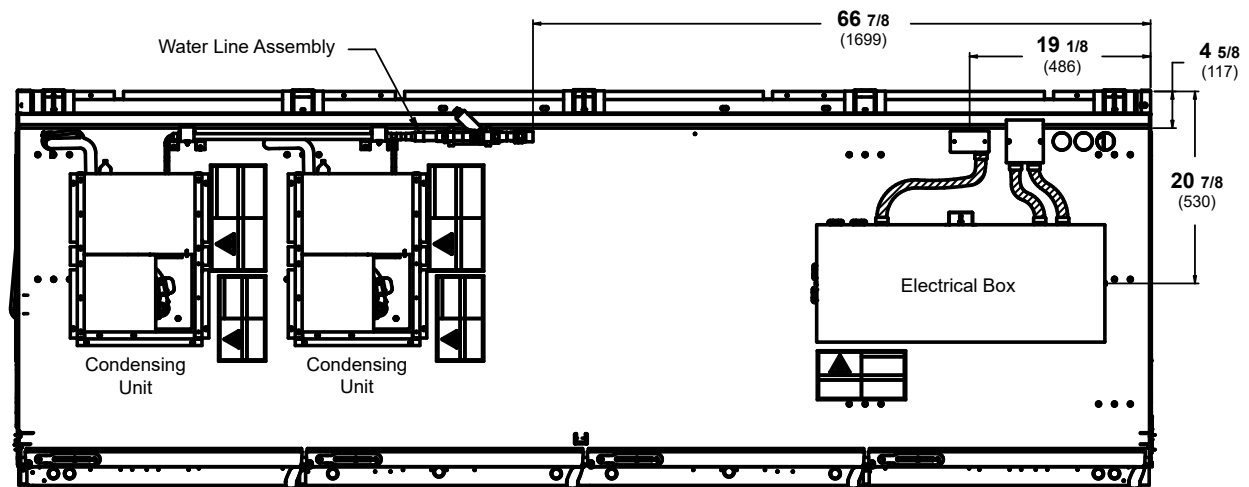

RL4SP Top View

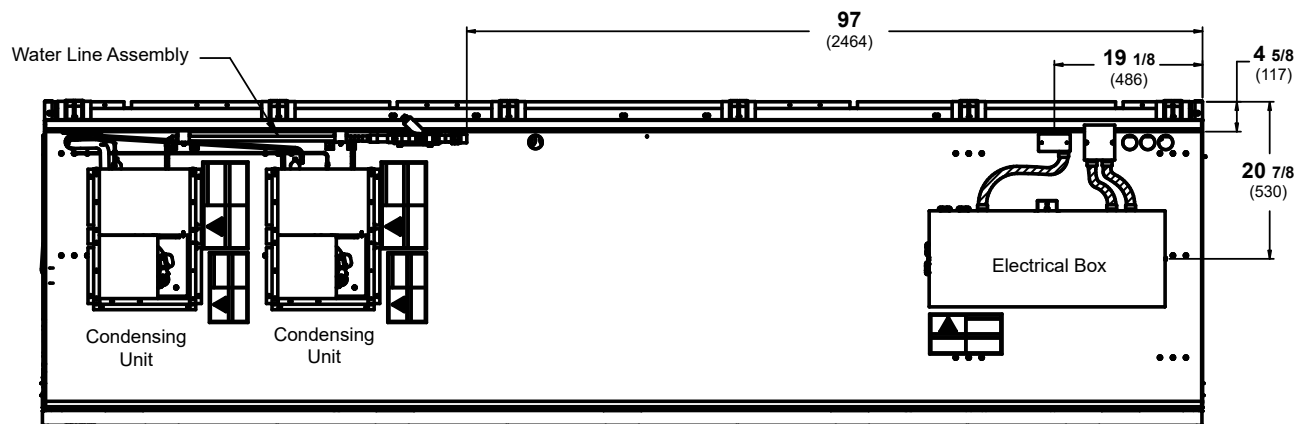

RL5SP Top View



Scan the QR code with your mobile device to access additional product information or order parts.

Parts may also be ordered at:

parts.husmann.com

Call toll free: 1.855.487.7778

Revision History

Revision A - C: Old format

Revision D: April 2019: Reformatted and updated performance data.

Revision E: November 2020: Updated performance data, drawings and wiring diagrams; remove replacement parts page.