


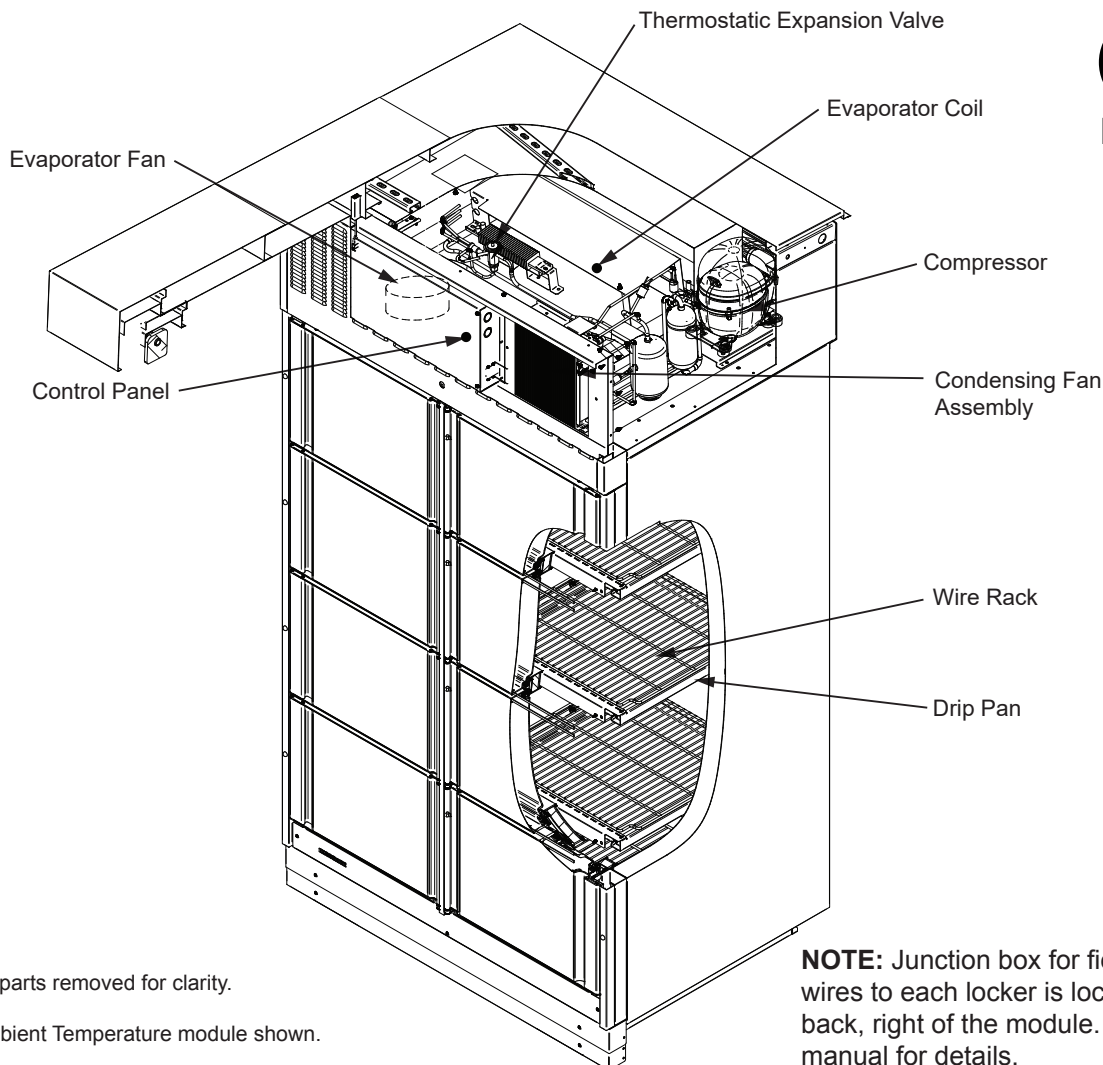

Performance Data
Product Data (AHRI Statistics)
Cross Section
Locker Views

Page 2
Page 2
Page 3
Page 4

QR Code for Wiring Diagrams
Electrical & Estimated Shipping Weights
QR Code for Parts and Product Information
Revision History

Page 6
Page 8
Page 9
Page 9

Data sheet-SLOA

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

SMART EXCHANGE LOCKER SLOA

Ambient Temperature

Refrigeration Data

Smart Exchange Locker		8-Door
208 Volt	Compressor	Copeland ARE29C4E-IAI
	Refrigerant	R513A
	Refrigerant Charge (lbs)	2 lbs (9 oz)
	Oil Charge (oz)	12 oz
	Performance (-10/120)	1675 Btuh
	Compressor (Amps)	2.5
	Heater (Watts)	676
	Heater (Amps)	3.25
120 Volt	Evaporator Fan (Amps)	0.3
	Evaporator Fan Power (Watts)	23
	Condenser Fan (Amps)	0.2
	Condenser Fan Power (Watts)	11.1
	Anti-Sweat (Amps)	229
	Anti-Sweat (Watts)	1.9
Operational Data	Discharge Air °F (°C)	65 °F (18.3 °C)
	Evaporator Temperature °F (°C)	20 °F (-6.7 °C)
	Defrost	None
	Defrost Frequency (hrs)	--
	Defrost Termination Temperature °F (°C)	--
	Defrost Failsafe	--
	Ambient Range °F (°C)	-10 °F (-23.3 °C) to 110 °F (43.3 °C)
	Minimum Condensing Temperature (°F/psig)	75 °F/80 psig
Unlit	Power	208-230/1/60
	Power	4-Wire
	MCA (Amps)	10.1
	MOPD	20

Product Data

Gross Refrigerated Volume ¹ (Cu Ft/Module) 41.3 ft³/module

Shelf Area (Sq Ft/Door) 3.24 ft²/door

¹ AHRI Gross Refrigerated Volume: Refrigerated Volume/Module ft³/module.


SMART EXCHANGE LOCKER SLOA

Ambient Temperature

Smart Exchange Locker

Dimensions shown as in. and (mm).

Side View

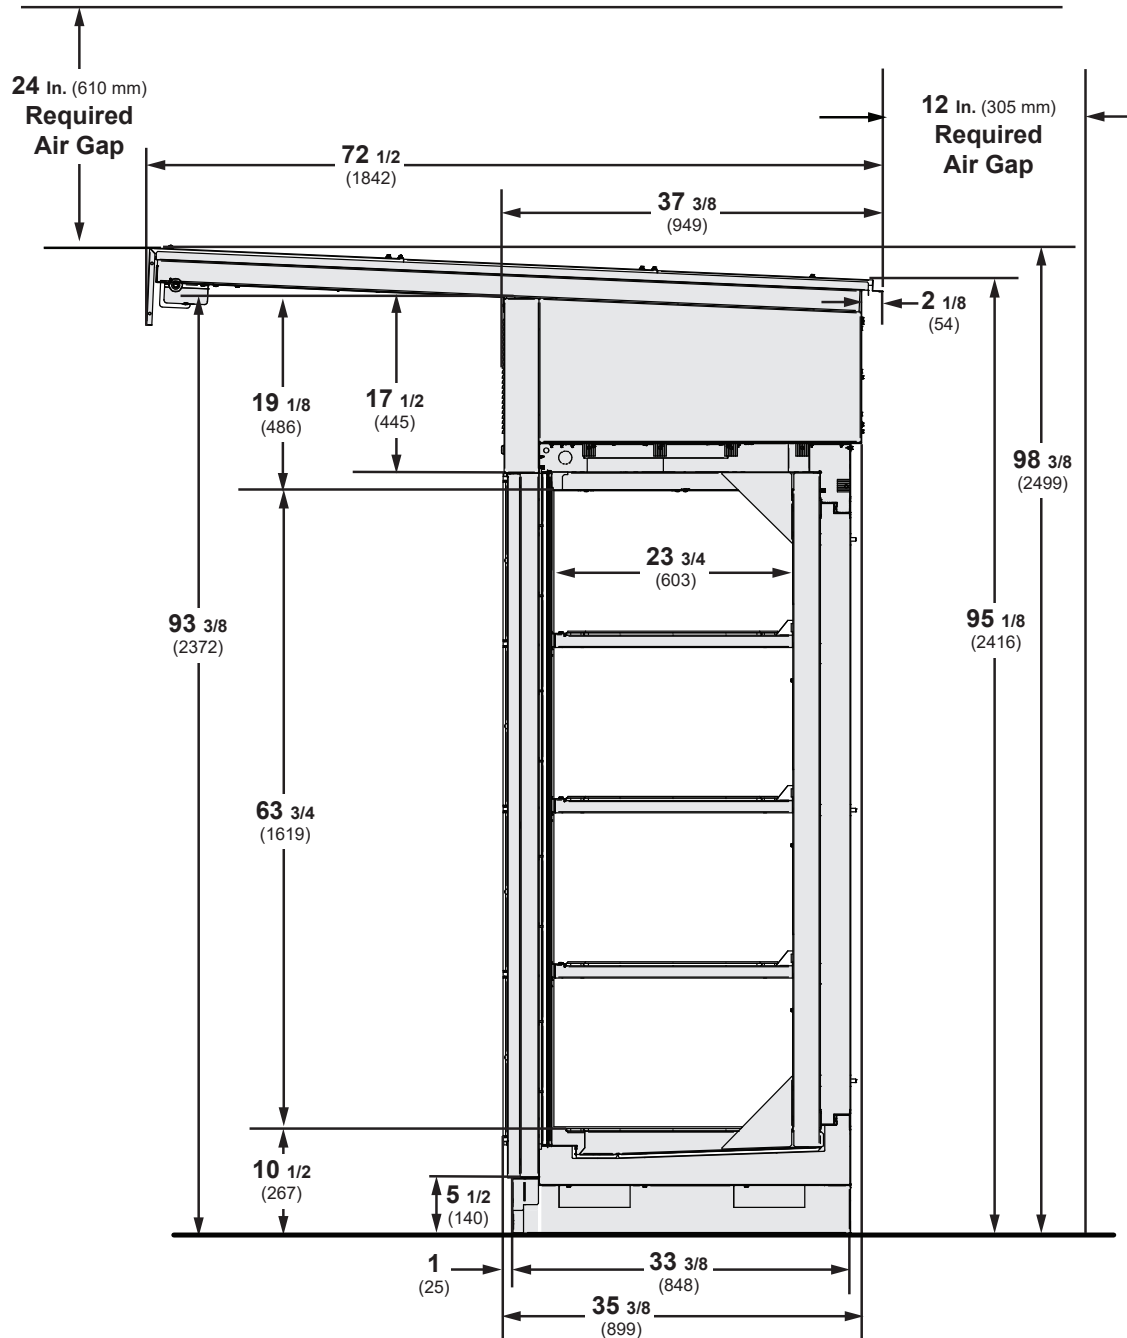

SMART EXCHANGE LOCKER SLOA


Ambient Temperature

Locker Views

Dimensions shown as in. and (mm).

Smart Exchange Locker

Front View

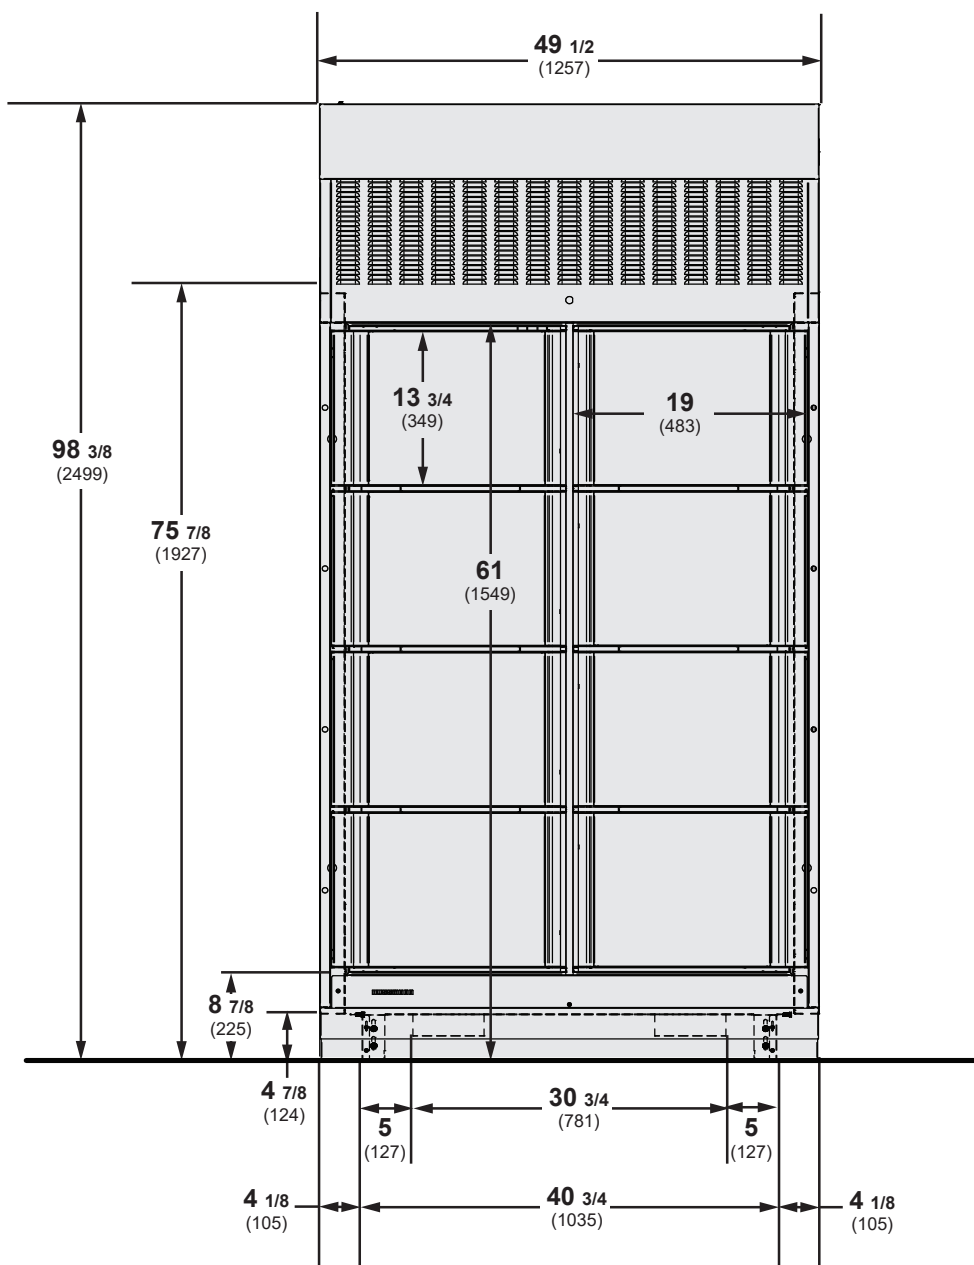


Front View

Locker Views

SMART EXCHANGE LOCKER SLOA Ambient Temperature

Dimensions shown as in. and (mm).

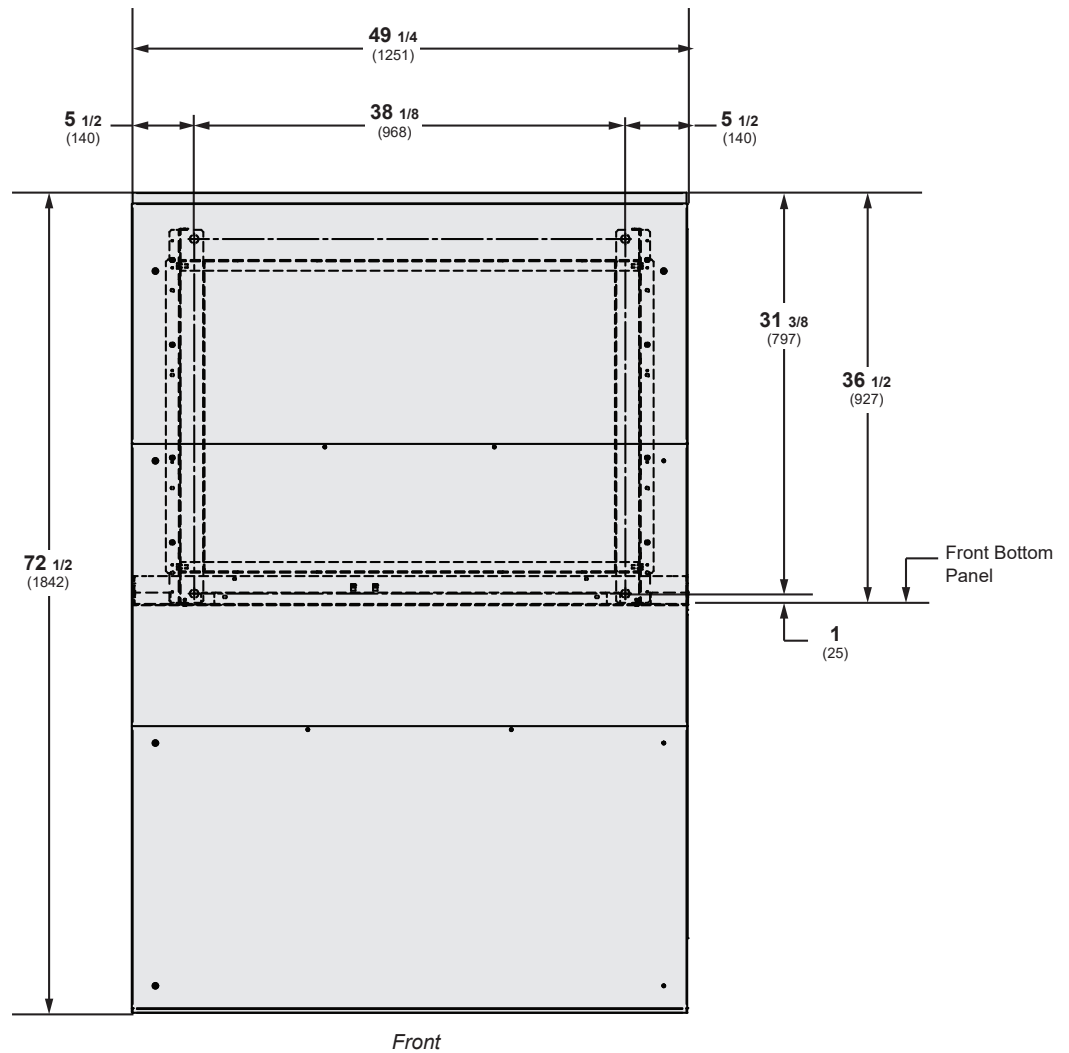

Plan View

SMART EXCHANGE LOCKER SLOA


Ambient Temperature

Locker Views

Dimensions shown as in. and (mm).

Smart Exchange Locker

Detail A View

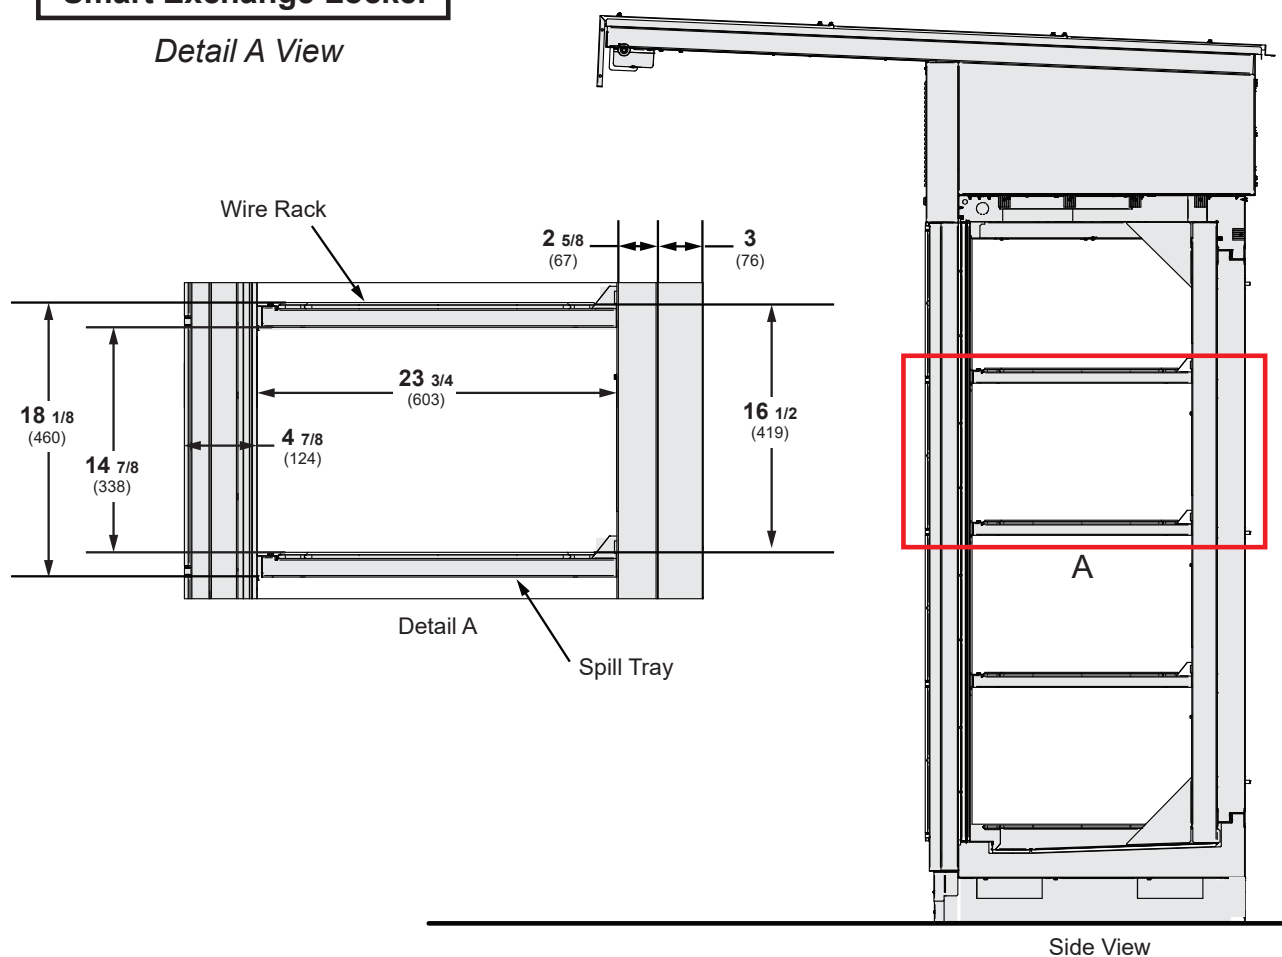

Detail A Tray View




Wiring Diagrams

Scan the QR code with your mobile device to access online wiring diagrams for this module.

Locker Views

SMART EXCHANGE LOCKER SLOA Ambient Temperature

Dimensions shown as in. and (mm).

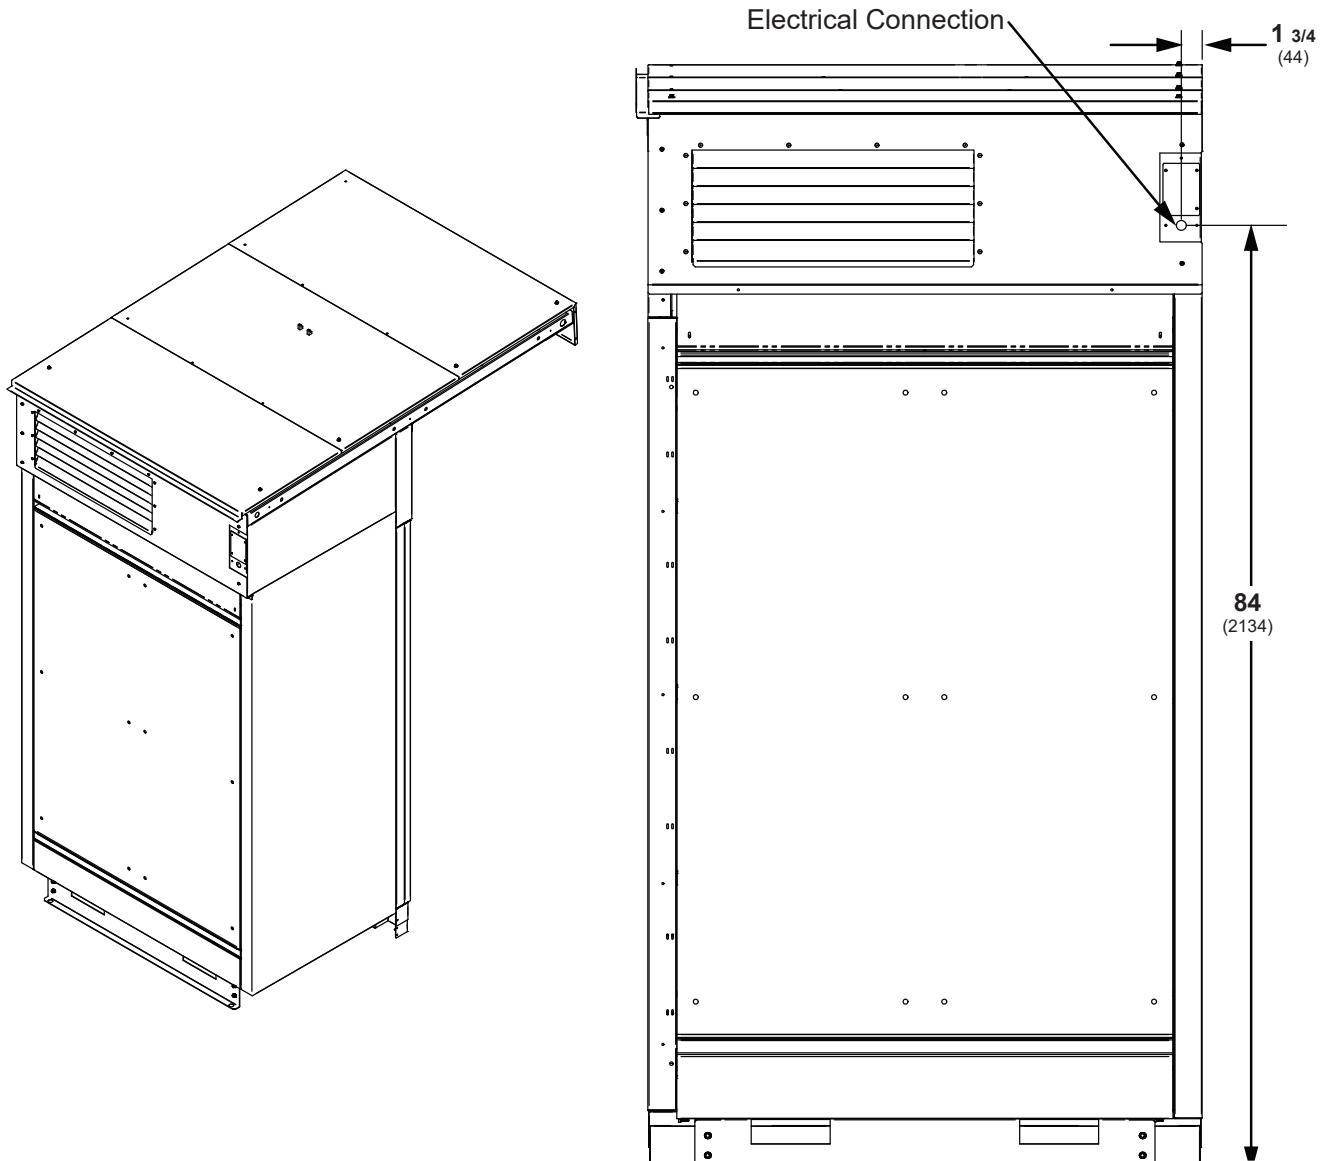

Back of Module (Dimensions to Rear Junction Box)

SMART EXCHANGE LOCKER SLOA

Ambient Temperature

Electrical Data

Module Type

Ambient Temperature

L1 L2

Amperes

Watts

L1 L2

Controls/Locker Components

1.61 -

193.2

Fans

0.5 -

34.0

A/S Heater

- 1.93

231.6

Space Heater

3.25 3.25

676

Compressor

2.5 2.5

520.0

Crankcase Heater

0.17 0.17

35.4

Total

5.53 5.35

Field Power

208V 4 Wire

L1 L2

MCA

6.91 6.69

MOPD

9.59 9.41

Breaker Size

20 20

ESTIMATED SHIPPING WEIGHT †

Case

SLOA

lb (kg)

1060 (481) (includes canopy section)

† Actual weights will vary according to optional kits included.

SMART EXCHANGE
LOCKER SLOA
Ambient Temperature



Scan the QR code with your mobile device to access additional product information or order parts.

Parts may also be ordered at:

parts.husmann.com

Call toll free: 1.855.487.7778

Revision History

Revision A: August 2020: Original Issue

Revision B: December 2020: Updated performance data, QR codes and drawings.