





SELF-SERVICE DELI
HUSSMANN - Q2-SPN-S (CHINO)

REVISION DATE

10/07/19



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

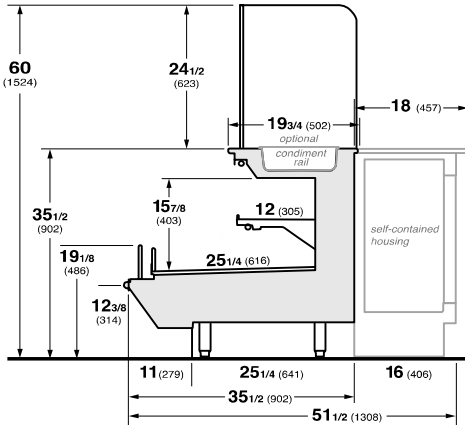

REFRIGERATION DATA:

CASE LENGTHS	CASE USAGE	CONVENTIONAL CAPACITY * (BTU/HR/FT)	DISCHARGE AIR * (°F)	VELOCITY (FT/MIN)
4', 6'	DELI	740	33~35	190~225

*FRONT DISCHARGE AIR MEASURED INSIDE AIR CURTAIN HONEYCOMB

**REFRIGERATION NOTES:

- 1) CAPACITY FOR REFERENCE ONLY
- 2) RATING CONDITION IS NSF TYPE I, 75°F/55% RH

REFRIGERATION DATA CONTINUED:

ELEC. THERMOSTAT / AIR SENSOR SETTINGS			DEFROST TYPE	TIME (MIN)	DEFROST FREQUENCY (#/DAY)	TERM. TEMP (°F) COIL ONLY	DRIP TIME	DEFROST WATER (LBS/DAY/FT)
USAGE	SET POINT (°F)	DIFFERENTIAL (°F)						
DELI	23	8	OFF TIME	30	6	52	TBD	0.6

END PANEL WIDTH KEY		
# OF END PNLS	END PNL WIDTH (IN.)	TOTAL ADDED LENGTH (IN.)
1	1.125	1.125
2	1.125	2.25

ELECTRICAL DATA:

STANDARD FANS, HEATERS, LED LIGHTS (115 VOLT)

CASE LENGTH	EVAPORATOR FANS					CANOPY LIGHTS LED		OPTIONAL LED SHELF LIGHTS		MAX. LED LOAD (W/ ALL OPTIONS)		ANTI-SWEAT HEATERS		CONVENIENCE OUTLETS (OPTIONAL)		
	# OF EVAP FANS	BLADE DIA. (IN.)	BLADE PITCH (°)	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	# OUTLETS	VOLTS	AMPS
4'	2	6.7	25	0.24	16	0.09	10	0.09	10	0.18	21	0.20	23	1	115	15
6'	4	6.7	25	0.48	32	0.13	15	0.13	15	0.27	31	0.30	34	1	115	15

CONDENSING UNITS AND EVAPORATIVE PANS (115 VOLT)

CASE LENGTH	CONDENSING UNIT					EVAPORATIVE PAN			EST REFG CHRGE (LBS)	NEMA PLUG
	NOM. HP	REFRIG.	Hz/Ph	VOLTS	RLA	VOLTS	AMPS	WATTS		
4'	1/2	R404A	60/1	115	10.0	120	8.3	1000	1	N/A
6'	1/2		60/1	115	10.5	120	12.5	1500	1.6	N/A
4'	1/2	R448A	60/1	115	10.0	120	8.3	1000	1	N/A
6'	3/4		60/1	115	15.0	120	12.5	1500	1.6	N/A

OPTIONAL HIGH OUTPUT LED LIGHTS (115 VOLT)

CASE LENGTH	CANOPY LIGHTS H.O. LED		OPTIONAL SHELF		MAX. H.O. LED LOAD	
	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
4'	0.13	15	0.22	26	0.35	41
6'	N/A	N/A	N/A	N/A	N/A	N/A