



### Q3-SSNM-S

Narrow Self-Contained, Multi-Deck Merchandisers for Deli, Meat, Produce, Dairy and more



#### ADVANTAGES



##### Increase Impulse Buys

Display promo items from deli, produce or bakery to increase sales.

##### Self-Contained Location Flexibility

Plug & play design with casters allow you to feature products anywhere in your store. Easily relocate anywhere you have electricity - for quick remodels

##### Extend Product Shelf Life

Adjustable controls to set ideal temperatures based on products being merchandised

##### Merchandising Flexibility

Create ideal product facings for the product being merchandised using optional wire racks, shelves, or steps.

##### Farmers Market Look

Multiple finish options gives the display case/ merchandiser a 'farmers market' look and typically matches current décor.

##### Reduce Waste and Labor

This display case offers more pack out in a small footprint. More product is available for your customer to purchase, and it reduces re-stock.

##### Less Shrinkage

State-of-the-art refrigeration extends product life and the unique design displays more product and allows for more pack out. Customers have an open view to choose items they want quickly and easily.

##### Simple Temperature Adjustment


Store personnel can easily adjustment case temperature.





#### KEY POINTS

##### Location Flexibility

Plug & play design with casters allow you to feature products anywhere in your store

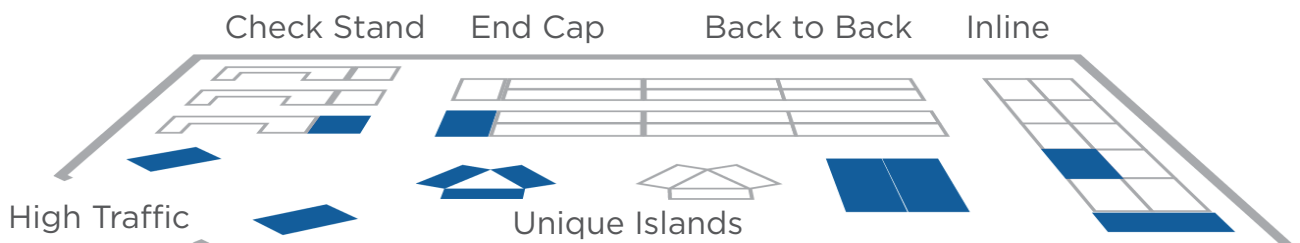

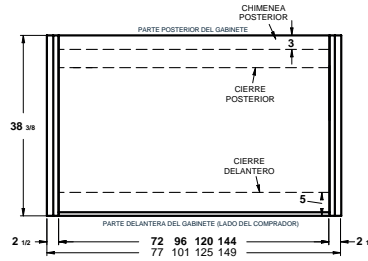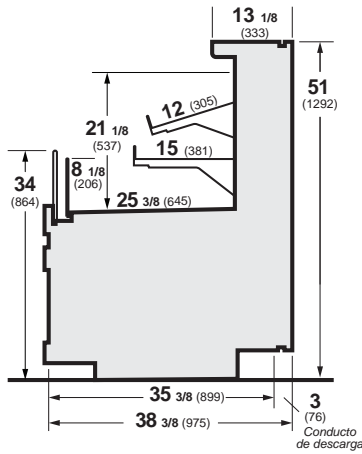

**Lengths.**

- (Q3-SSNM-6S) 6'  (Q3-SSNM-10S) 10'
- (Q3-SSNM-8S) 8'  (Q3-SSNM-12S) 12'

**Lead Time.**

- 4 to 6 weeks (from date of order)

**Standard.**

- Wood crate exterior (see below for available stains)
- R-448A Regulatory-Compliant Low GWP Refrigerant condensing unit (self-contained)
- Color Interior - black
- Deck has angled adjustable wire rack
- 10 1/2" tall, 1/2" thick Plexiglas® front
- Black thermoplastic front ledge
- Digital Danfoss AKCC210 controller with front access
- Energy efficient fans
- Condensate evaporation pan
- View end panel
- Power cord
- Rear top air discharge flue
- Recessed caster base

**Options.**

- Shelves: 12" and 15" 12"  15"
- Shelves: Black PTM Yes  No
- Top and bottom case PTM Yes  No
- Shelf product stop: Clear or Green Clear  or Green

**Available Wood Stain.**

- Zanzibar
- Rustico
- Shaker Cherry
- Hickory Clear Coat
- Select Cherry
- Topaz
- Fruit Alabaster

Zanzibar




Shaker Cherry



Select Cherry



Fruit Alabaster




Rustico



Hickory Clear Coat



Topaz



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.

**Note.**

Use Hussmann's technical data sheets to get precise dimensions for all store layout purposes.



Intertek



Intertek



L14-30P



L14-20P

\* Some optional features may need to be certified by UL, NSF, and/or other 3rd party certification agencies. Contact Hussmann for verification or questions for availability.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H. Case is designed for holding pre-chilled product only.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources and warranties, contact your representative or visit [www.hussmann.com](http://www.hussmann.com).

Model	Exterior Dimensions			Nom. HP	Refrig.	Hz/Ph	Electrical			NEMA Plug	Refrig.** Load (BTU/h)	A/C Load (BTU/h)	Approx. Ship Wt. (lbs)
	L	D	H				Circuit	Fuse Amps	Volts				
Q3-SSNM-6S	72"	37 5/8"	51"	3/4	R-448a	60/1	240v	15.96	20	L14-20P	5920	10,714	1107 (502kg)
Q3-SSNM-8S	96"	37 5/8"	51"	1	R-448a	60/1	240v	17.15	20	L14-20P	7810	12,809	1408 (639kg)
Q3-SSNM-10S	120"	37 5/8"	51"	3/4(x2)	R-448a	60/1	240v	22.83	30	L14-30P(x2)	7320	16,424	1708 (775kg)
Q3-SSNM-12S	144"	37 5/8"	51"	3/4(x2)	R-448a	60/1	240v	27.52	30	L14-30P(x2)	11,840	21,428	1957 (888kg)

\*\* Refrigeration load calculated at 20° F evaporation and 110° F condensing temperature.

**Hussmann**  
13770 Ramona Avenue  
Chino, California 91710-5423  
Ph: 1-800.395.9229

[www.hussmann.com](http://www.hussmann.com)

**HUSSMANN®**