



IM-03-H

Self service hot module

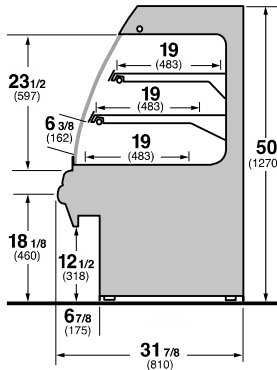



IM-04-H

Hot Multi-Deck

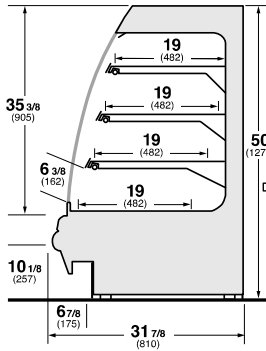


IM-05-H


Hot Multi-Deck

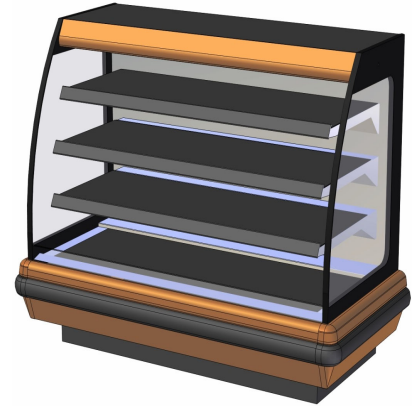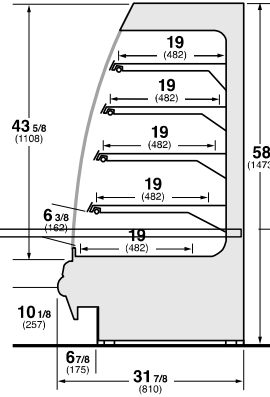

IM-C5-H Center Module / IM-15-H Q-Series Match

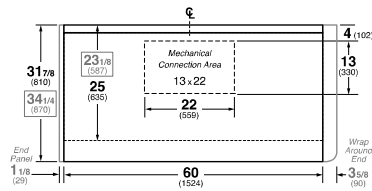

IM-E5-H End Module

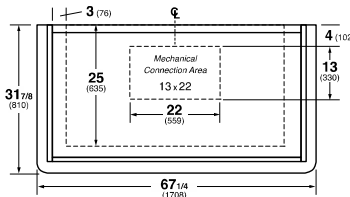

ELECTRICAL DATA:

208 VOLT MODELS *	VOLTS	PH	HZ	TOTAL HOT LEVELS ***	WATTS	AMPS	WIRES **	LED LIGHTS			NEMA PLUG
								# ROWS	AMPS	WATTS	
IM-03-X3-H208	208	1	60	3	1766	8.5	4	3	0.09	9	L14-20P
IM-03-X4-H208	208	1	60	3	2413	11.8	4	3	0.13	14	L14-20P
IM-03-X5-H208	208	1	60	3	N/A	N/A	4	3	N/A	N/A	N/A
IM-03-X6-H208	208	1	60	3	3723	17.9	4	3	0.19	21	L14-30P
IM-03-X8-H208	208	1	60	3	4805	23.1	4	3	0.26	28	L14-30P
IM-04-X2-H208	208	1	60	4	1519	7.3	4	4	0.07	7	L14-20P
IM-04-X3-H208	208	1	60	4	1685	8.1	4	4	0.10	11	L14-20P
IM-04-X4-H208	208	1	60	4	3328	16	4	4	0.38	41	L14-30P
IM-04-X5-H208	208	1	60	4	3349	16.1	4	4	0.23	25	L14-30P
IM-04-X6-H208	208	1	60	4	4971	23.9	4	4	0.25	28	CS-6365-C
IM-04-X8-H208	208	1	60	4	6392	30.7	4	4	0.33	36	CS-6365-C
IM-05-X3-H208	208	1	60	5	2122	10.2	4	5	0.13	14	L14-30P
IM-05-X4-H208	208	1	60	5	3994	19.2	4	5	20	22	L14-30P
IM-05-X5-H208	208	1	60	5	5137	24.7	4	5	0.28	31	CS-6365-C
IM-05-X6-H208	208	1	60	5	6323	30.4	4	5	0.32	34	CS-6365-C
IM-05-X8-H208	208	1	60	5	7988	38.4	4	5	N/A	N/A	CS-6365-C

240 VOLT MODELS *	VOLTS	PH	HZ	TOTAL HOT LEVELS ***	WATTS	AMPS	WIRES **	LED LIGHTS			NEMA PLUG
								# ROWS	AMPS	WATTS	
IM-03-X3-H240	240	1	60	3	2040	8.5	4	3	0.09	9	L14-20P
IM-03-X4-H240	240	1	60	3	2784	11.6	4	3	0.13	14	L14-20P
IM-03-X5-H240	240	1	60	3	2760	11.5	4	3	0.13	14	L14-20P
IM-03-X6-H240	240	1	60	3	4296	17.9	4	3	0.19	21	L14-30P
IM-03-X8-H240	240	1	60	3	5544	23.1	4	3	0.26	28	L14-30P
IM-04-X2-H240	240	1	60	4	1753	7.3	4	4	0.07	7	L14-20P
IM-04-X3-H240	240	1	60	4	1944	8.1	4	4	0.10	11	L14-20P
IM-04-X4-H240	240	1	60	4	3840	16	4	4	0.38	41	L14-30P
IM-04-X5-H240	240	1	60	4	3864	16.1	4	4	0.23	25	L14-30P
IM-04-X6-H240	240	1	60	4	5735	23.9	4	4	0.25	28	CS-6365-C
IM-04-X8-H240	240	1	60	4	7375	30.8	4	4	0.33	36	CS-6365-C
IM-05-X3-H240	240	1	60	5	2448	10.2	4	5	0.13	14	L14-30P
IM-05-X4-H240	240	1	60	5	4608	19.2	4	5	20	22	L14-30P
IM-05-X5-H240	240	1	60	5	5927	24.7	4	5	0.28	31	CS-6365-C
IM-05-X6-H240	240	1	60	5	7295	30.4	4	5	0.32	34	CS-6365-C
IM-05-X8-H240	240	1	60	5	9217	38.4	4	5	N/A	N/A	CS-6365-C

* X = C, E, I C = CENTER, E = END, I = INLINE

** INCLUDES GROUND WIRE

*** TOTAL HEATED LEVELS = # ROWS OF SHELVES + BOTTOM WARMING SURFACE

LEGEND

N/A -	NOT AVAILABLE	
TBD -	TO BE DETERMINED	
SBO -	SUPPLIED BY OTHERS	
EXTERNAL END PANEL WIDTH KEY		
# OF END PNLS	END PNL WIDTH (IN.)	TOTAL ADDED LENGTH (IN.)
1	1.125	1.125
2	1.125	2.25

MODULE NOMENCLATURE KEY:

IM =	ISLA MODULE	
*** 03 =	3 HEATED LEVELS HIGH W/ +8" BASE	50"
*** 04 =	4 HEATED LEVELS HIGH	50"
*** 05 =	5 HEATED LEVELS; HIGH	58"
* C, E, I =	CENTER, END or INLINE CASE	
(#) =	(MODULE LENGTH IN FEET)	
H =	HOT SELF SERVICE MULTIDECK	
EXAMPLE	IM-04-E5-H = ISLA MODULE, 50" HIGH, END 5' WIDE, HOT SELF-SERVICE MULTI-DECK	

OPTIONS/NOTES:

- NOTE: CASE WIDTH INCLUDES END PANELS WITH OPTIONAL INTERIOR END PANELS
- NOTE: CASES MUST BE GROUNDED
- NOTE: FOR TOTAL ELECTRICAL LOADS ADD LIGHT AMPS HOT LEVEL AMPS.