

**HUSSMANN®/CHINO**

Installation  
& Operation  
Manual


REV. 1123

**Q2-SS**

**SELF SERVICE CASE**

**HUSSMANN®**

**Q2-SS  
SELF SERVICE  
CASE**

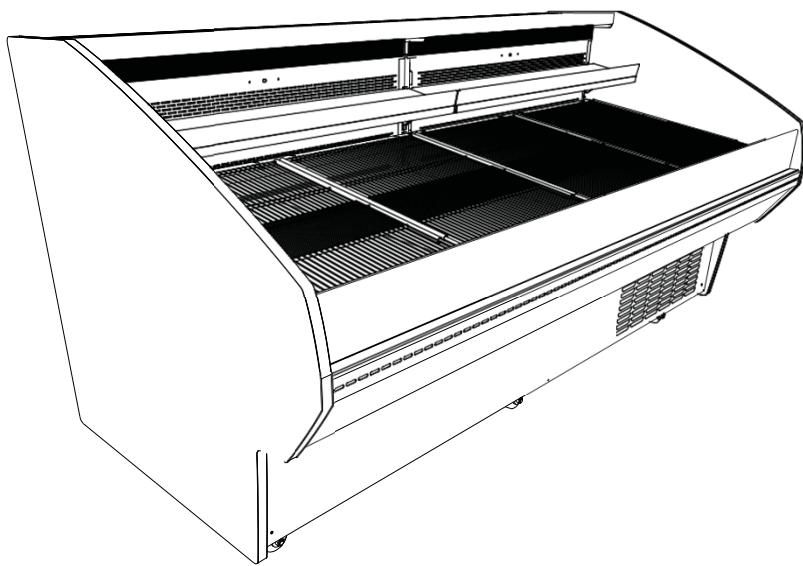

---

**INSTALLATION & OPERATION GUIDE**

## 1. General Instructions

### HUSSMANN®/CHINO

A publication of HUSSMANN® Chino  
13770 Ramona Avenue • Chino, California 91710  
(909) 628-8942 FAX  
(909) 590-4910  
(800) 395-9229

[www.hussmann.com](http://www.hussmann.com)

**This Booklet Contains Information on:**  
Q2-SS refrigerated, service deli merchandiser.

#### **Shipping Damage**

All equipment should be thoroughly examined for shipping damage before and during unloading.

This equipment has been carefully inspected at our factory and the carrier has assumed responsibility for safe arrival. If damaged, either apparent or concealed, claim must be made to the carrier.

#### **Apparent Loss or Damage**

If there is an *obvious loss or damage*, it must be noted on the freight bill or express receipt and signed by the carrier's agent; otherwise, carrier may refuse claim. The carrier will supply necessary claim forms.

#### **Concealed Loss or Damage**

When loss or damage is *not apparent until after all equipment is uncrated*, a claim for concealed damage is made. Make request in writing to carrier for inspection within 15 days, and retain all packaging. The carrier will supply inspection report and required claim forms.

#### **Shortages**

Check your shipment for any possible shortages of material. If a shortage should exist and is found to be the responsibility of Hussmann Chino, *notify Hussmann Chino*. If such a shortage involves the carrier, *notify the carrier immediately*, and request an inspection. Hussmann Chino will acknowledge shortages within ten days from receipt of equipment.

#### **Hussmann Chino Product Control**

The serial number and shipping date of all equipment has been recorded in Hussmann's files for warranty and replacement part purposes. All correspondence pertaining to warranty or parts ordering must include the serial number of each piece of equipment involved, in order to provide the customer with the correct parts.

**Keep this booklet with the case at all times for future reference.**


---

## 2. Table of Contents


1. General Instructions.....	2
2. Table of Contents .....	3
3. Cut and Plan Views .....	4
4. Installation.....	5
5. Plumbing .....	9
6. Refrigeration .....	9
7. Spec Sheet .....	10
8. Electrical.....	12
9. Wiring Diagrams index.....	13
10. Wiring Diagrams .....	14
11. User Information .....	31
12. Maintenance.....	32
13. Troubleshooting Guide .....	35
14. Appendices .....	37
15. Controller Parameters.....	40
16. Danfoss Controller Operations .....	44
17. Dixell Controller Operations.....	45

### 3. Cut and Plan Views

**Q2-SS-SC**  
Self-Service Self-Contained

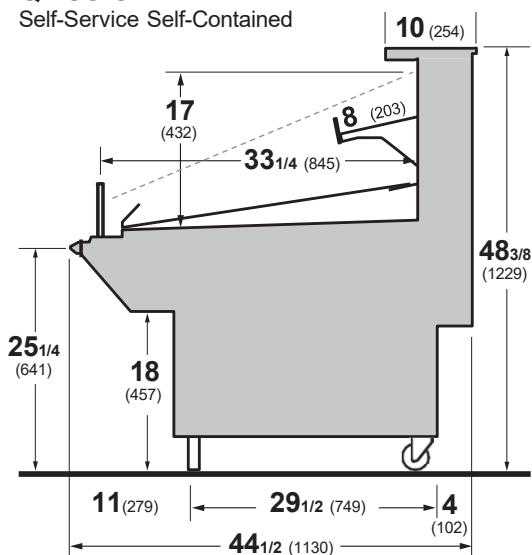

**Q2-SS-SC** Self Service Self-Contained

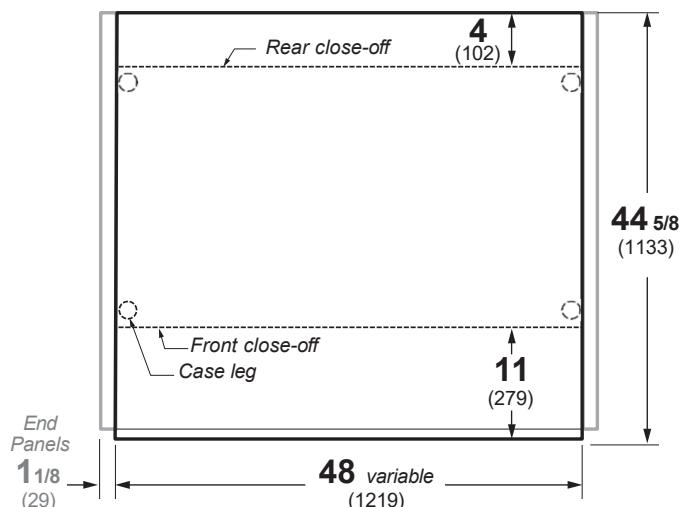

## 4. Installation

### Location

The refrigerated merchandisers have been designed for use only in air conditioned stores where temperature and humidity are maintained at or below 75°F and 55% relative humidity. DO NOT allow air conditioning, electric fans, ovens, open doors or windows (etc.) to create air currents around the merchandiser, as this will impair its correct operation.

#### **NOTE: MAINTAIN MIN. CLEARANCE OF 15' FROM DOORS, VENTS OR HIGH HEAT SOURCES.**

Product temperature should always be maintained at a constant and proper temperature. This means that from the time the product is received, through storage, preparation and display, the temperature of the product must be controlled to maximize life of the product.

### Uncrating the Stand

Place the fixture as close to its permanent position as possible. Keep in place, attached case until ready to set bolt to adjoining case.

### Tighten Glass Screws

Tighten screws along clamshell located on the underside of glass before placing unit into operation.

### Exterior Loading

These models have not been structurally designed to support excessive external loading. Do not walk on their tops; This could cause serious personal injury and damage to the fixture.

### Setting and Joining

The sectional construction of these models enable them to be joined in line to give the effect of one continuous display.

An Alignment pin kit is supplied with every case and must be used in alignment.

### Leveling

**IMPORTANT! IT IS IMPERATIVE THAT CASES BE LEVELED FROM FRONT TO BACK AND SIDE TO SIDE PRIOR TO JOINING. A LEVEL CASE IS NECESSARY TO INSURE PROPER OPERATION, WATER DRAINAGE, GLASS ALIGNMENT AND OPERATION OF THE HINGES SUPPORTING THE GLASS. LEVELING THE CASE CORRECTLY WILL SOLVE MOST HINGE OPERATION PROBLEMS.**

- Using case blueprints, measure off and mark on the floor the exact dimensions of where the cases will sit. Snap chalk line for front and back positions of base rail or pedestal. Mark the location of each joint front and back. Find the highest point throughout the lineup. FLOORS ARE NORMALLY NOT LEVEL! Determine the highest point of the floor; cases will be set off this point. All cases in the entire lineup must be brought up to the highest level of the case sitting at the highest point in the lineup. This may be done a few different ways.

a) Walk the floor looking for any mounds or dips.

b) Use a string level.

c) Use a transit.

If a wedge is used in the middle of a lineup, the wedge must be set on the highest point on the floor FIRST, with the rest if the lineup being leveled from it. The Q2-SS case has adjustable legs to allow for leveling.

- Set first case over the highest part of the floor and adjust legs so that case is level. Remove side and back leg braces after case is set and joined.
- Set second case within one foot (1') of the first case, and remove leg skids. Keep the supports along the length of the case and far end of case. Level case to the first using the instructions in step one.
- Apply masking tape 1/8" in from end of case on inside and outside rear mullion and body work on both cases to be joined.
- Apply liberal bead of case joint sealant (butyl) to first case. Sealant area is shown using a dotted line in illustration in Step 8. Apply heavy amount to cover entire shaded area.

**DO NOT USE PERMAGUM!**




- Slide second case up to first case snugly. Then level second case to the first case so glass front, bumper and top are flush.



## Installation (Cont'd)

7. To compress butyl at joint, use two Jurgenson wood clamps. Make sure case is level from front to back and side to side on inside bulkheads at joint.
8. Attach sections together via the bolts pictured in the illustration below.
9. Apply bead of butyl to top of bulk heads and slip on stainless steel bulkhead cap. Also apply silicone to seam between joints.
10. Use finger to smooth silicone as thin as possible at masking tape on inside and outside of rear mullion (apply additional silicone if necessary). Remove tape applied on line #4.
11. Remove front, back and end shipping braces.

- Drawing is typical to Q-Series cases, self-service Q-series cases are excluded from glass and derive form the drawing as shown below.

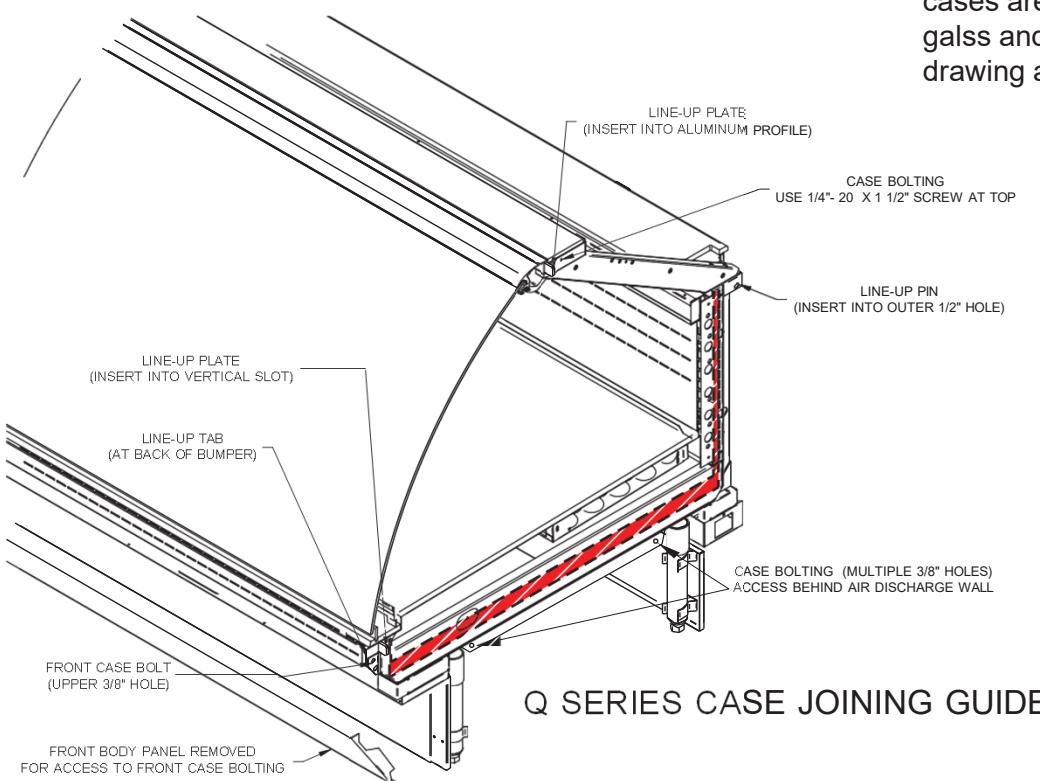

**Line Up Tab**



**Line Up Plate**



**It is the contractor's responsibility to install case(s) according to local construction and health codes.**

## Installation (Cont'd)

### Bumper Installation Instructions



Step 1: Make sure the aluminum channel and end caps are installed.



Step 2: Use silicone lubricant to help the bumper slide into the channel.



Step 3: Starting on one end: while inserting the bumper, push it up against the end cap to prevent the bumper from shrinking after installation (when it gets cold).

### **WARNING!**


**Do NOT apply thread sealer to ABS P-Trap.**



Step 4: As you insert the bumper into the channel with one hand, pull the bumper toward you with the other to open the inside lips. Slowly apply pressure by rolling the bumper into the track.

## Body Panel Removal

To remove the lower body panels follow the demonstration shown below.

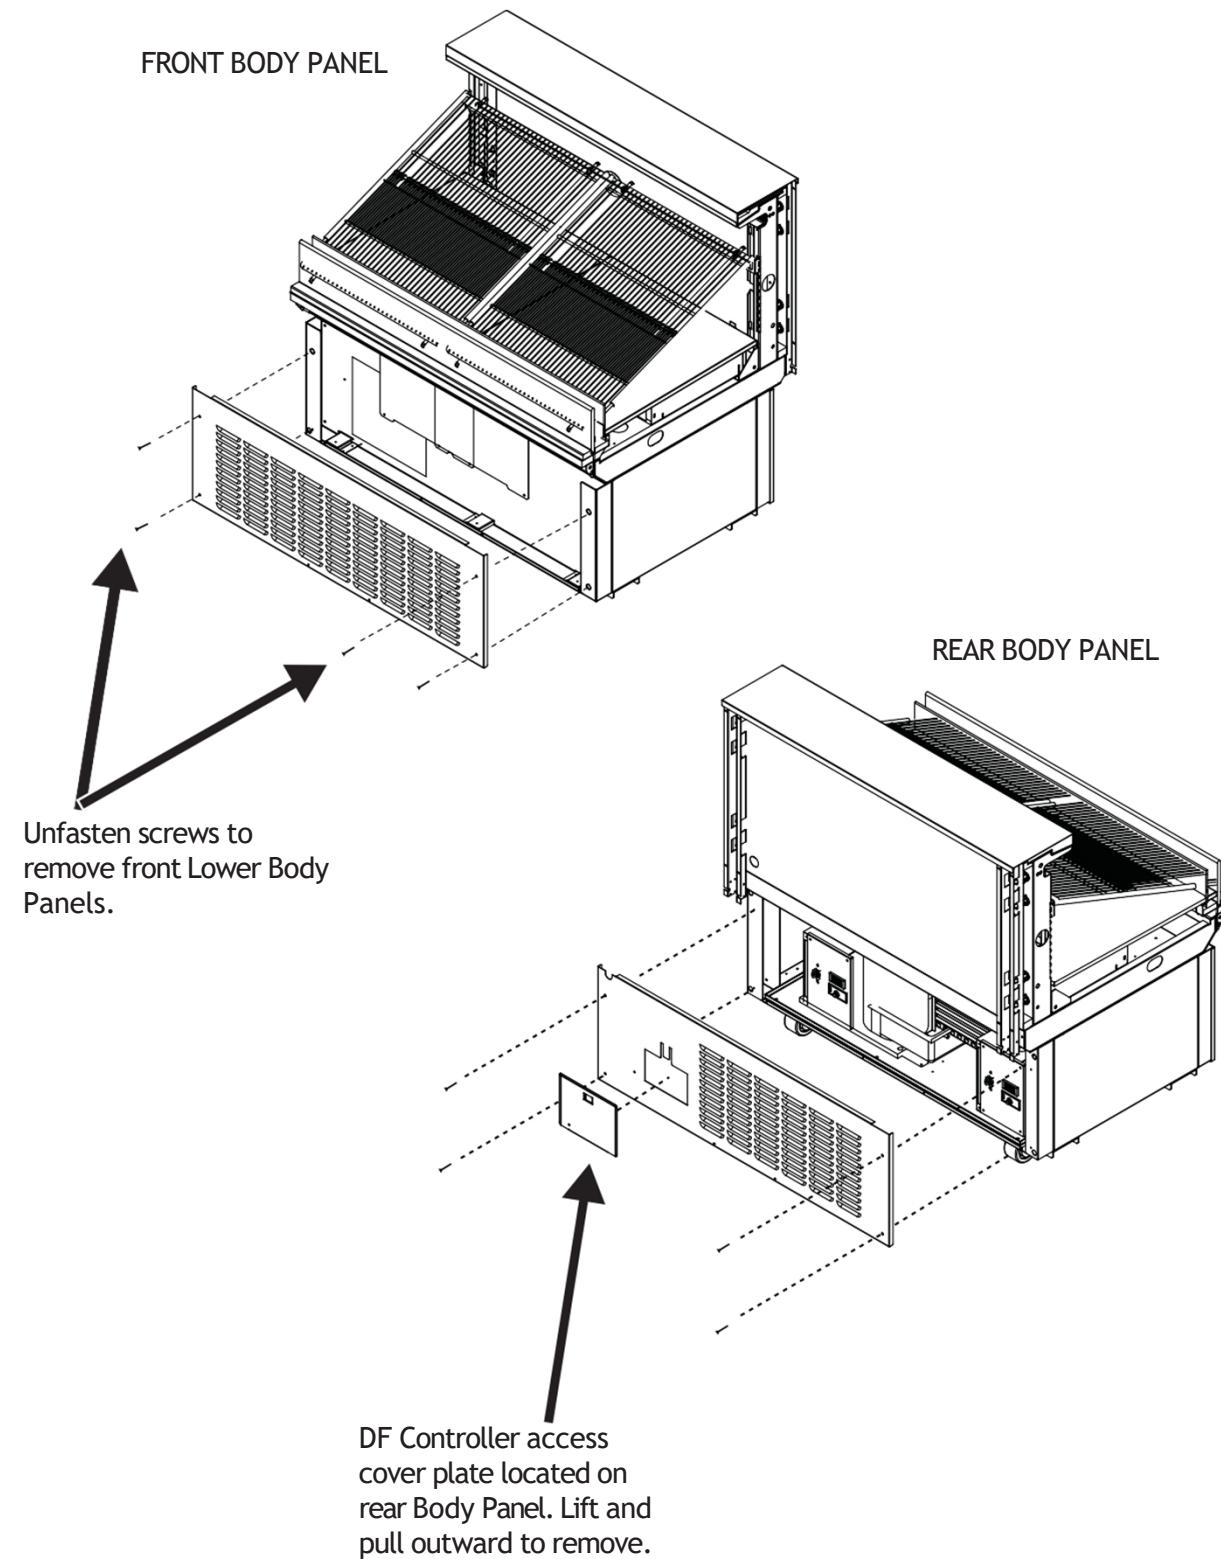

## 5. Plumbing

### Waste Outlet and P-TRAP

The waste outlet is located off the center of the case on one side allowing drip piping to be run lengthwise under the fixture.

P-traps must be installed at the base of all refrigerated cases. The 1 1/2" P-TRAP and threaded adapter must be installed to prevent air leakage and insect entrance into the fixture.

### Installing Condensate Drain

Poorly or improperly installed condensate drains can seriously interfere with the operation of this refrigerator, and result in costly maintenance and product losses. Please follow the recommendations listed below when installing condensate drains to insure a proper installation:

1. Never use pipe for condensate drains smaller than the nominal diameter of the pipe or P-TRAP supplied with the case.
2. When connecting condensate drains, the P-TRAP must be used as part of the condensate drain to prevent air leakage or insect entrance. Store plumbing system floor drains should be at least 14" off the center of the case to allow use of the P-TRAP pipe section. Never use two water seals in series in any one line. Double P-TRAPS in series will cause a lock and prevent draining.

3. Always provide as much down hill slope ("fall") as possible; 1/8" per foot is the preferred minimum. PVC pipe, when used, must be supported to maintain the 1/8" pitch and to prevent warping.
4. Avoid long runs of condensate drains. Long runs make it impossible to provide the "fall" necessary for good drainage.
5. Provide a suitable air break between the flood rim of the floor drain and outlet of condensate drain. 1" is ideal.
6. Prevent condensate drains from freezing:
  - a. Do not install condensate drains in contact with non-insulated suction lines. Suction lines should be insulated with a nonabsorbent insulation material such as Armstrong's Armaflex.
  - b. Where condensate drains are located in dead air spaces (between refrigerators or between a refrigerator and a wall), provide means to prevent freezing. The water seal should be insulated to prevent condensation.

## 6. Refrigeration

### Refrigerant Type

The standard refrigerant will be R-404A unless otherwise specified on the customer order. Check the serial plate on the case for information.

### Piping

The refrigerant line outlets are located under the case. Locate first the electrical box, the outlets are then on the same side of the case, but at the opposite end. Insulate suction lines to prevent condensation drippage.

### Refrigeration Lines

<u>Liquid</u>	<u>Suction</u>
3/8" O.D.	5/8" O.D.

**NOTE:** The standard coil is piped at 1/2" (suction); however, the store tie-in may vary depending on the number of coils and the draw the case has. Depending on the case setup, the connecting point in the store may be 5/8", 7/8", or 1 1/8". Refer to the particular case you are hooking up.

Refrigerant lines should be sized as shown on the refrigeration legend furnished by the store.

Oil traps must be installed at the base of all suction line vertical risers on refrigerated cases.

Pressure drop can rob the system of capacity. To keep the pressure drop to a minimum, keep refrigerant line run as short as possible, using the minimum number of elbows. Where elbows are required, use long radius elbows only.

### Control Settings

See Q2-SS technical data sheet for the appropriate settings for your merchandiser. Maintain these parameters to achieve near constant product temperatures. Product temperature should be measured first thing in the morning, after having been refrigerated overnight. For all multiplexing, defrost should be time terminated. Defrost times should be as directed in the Q2-SS technical data sheet. The number of defrosts per day should never change. The duration of the defrost cycle may be adjusted to meet conditions present at your location.

# 7. Spec Sheet






SELF-SERVICE DELI &amp; MEAT

HUSSMANN - Q2-SS-R / Q2-SSM-R

DOE 2017  
Energy Efficiency  
CompliantHusmann refrigerated merchandisers configured for sale  
for use in the United States meet or surpass the requirements  
of the DOE 2017 energy efficiency standards.

REVISION DATE 10/20/21

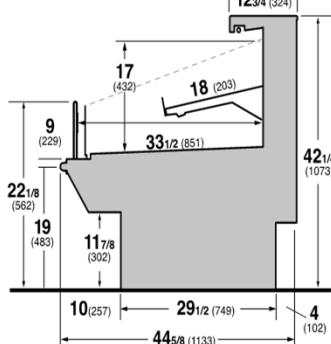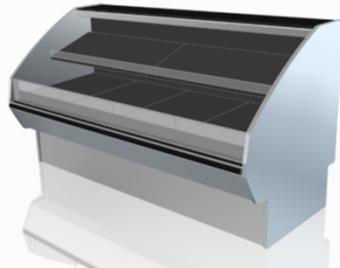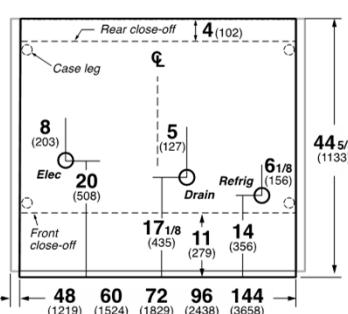**Q2-SS**  
Multi-deck Self-Service

**Q2-SS** Multi-deck Self Service


## REFRIGERATION DATA:

CASE LENGTHS/ WEDGES	CASE USAGE	CAPACITY *** (BTU/HR/FT) (TOTAL FOR WEDGES)		TEMPERATURE (°F)		VELOCITY (FT/MIN)	
		RATING CONDITION		EVAPORATOR	DISCHARGE AIR ** (°F)		
		NSF 7	AHR 1200	NSF 7	AHR 1200	NSF 7	NSF 7
4', 5', 6', 8', 10', 12'	DELI	640	640	22	22	28-30	150-175
22.5 OS	DELI	2995	2995	22	22	30-32	150-175
90° OS	DELI	2410	2410	22	22	28-30	150-175
REAR STORAGE	DELI	100	90	22	22	30-34	380-600

\*\*FRONT DISCHARGE AIR MEASURED INSIDE AIR CURTAIN HONEYCOMB; REAR STORAGE MEASURED AT EXIT TO COIL

\*\*\*REFRIGERATION NOTES:

- 1) BTU'S DO NOT INCLUDE LIGHTS
- 2) AHR 1200 RATING POINT FOR ENERGY CONSUMPTION COMPARISON ONLY
- 3) USE DEW POINT FOR HIGH GLIDE REFRIGERANTS. CARE SHOULD BE TAKEN TO USE THE DEW POINT IN P/T TABLES FOR MEASURING AND ADJUSTING SUPERHEAT. ADJUST EVAPORATOR PRESSURE AS NEEDED TO MAINTAIN THE DISCHARGE AIR TEMPERATURE SHOWN.
- 4) RATING CONDITION IS NSF TYPE I, 75°F/55% RH

## REFRIGERATION DATA CONTINUED:

LOCATION	ELEC. THERMOSTAT / AIR SENSOR SETTINGS		DEFROS T TYPE	TIME (MIN)	DEFROST FREQUENCY (#/DAY)	TERM. TEMP ("F) COIL ONLY	DRIP TIME	DEFROST WATER (LBS/DAY/FT )
	USAGE	CUT IN ("F")						
		CUT OUT ("F")						
FRONT	DELI	31	28	OFF	35	4	48	4.2
REAR STORAGE	DELI	35	32	TIME			45	0.7

CASE LENGTH	EST. REFG. CHRG. 404a (LBS)	GLYCOL (20°F INLET, 6° RISE) FRONT		GLYCOL (20°F INLET, 6° RISE) REAR STORAGE	
		GPM	PSI	GPM	PSI
4'	0.5	0.9	2.4	0.1	0.0
5'	0.6	0.9	2.5	0.1	0.1
6'	0.7	1.4	5.4	0.2	0.2
8'	1.0	1.8	2.5	0.3	0.4
10'	1.4	2.2	4.3	0.3	0.6
12'	1.5	2.6	5.1	0.4	0.8
90° OS	0.3	0.7	1.4	N/A	N/A

END PANEL WDTN KEY		
# OF END PNLS	END PNL WDTN (IN.)	TOTAL ADDED LENGTH (IN.)
1	1.125	1.125
2	1.125	2.25

## ELECTRICAL DATA: STANDARD FANS, HEATERS, LED LIGHTS (115 VOLT)

CASE LENGTH	EVAPORATOR FANS; SELF-SERVICE SECTION				EVAP FANS; REAR STORAGE (IF APPLICABLE)		CANOPY LIGHTS LED		OPTIONAL LED SHELF LIGHTS		MAX. LED LOAD (W/ ALL OPTIONS)		ANTI-SWEAT HEATERS (IF EQUIPPED)		
	# OF EVAP FANS	BLADE DIA. (IN.)	BLADE PITCH (")	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
4'	2	6.7	25	0.24	16	0.30	9	0.09	10	0.09	10	0.18	21	0.17	20
5'	2	6.7	25	3	16	0.30	9	0.00	13	0.11	13	0.11	26	0.26	30
6'	3	6.7	25	0.36	24	0.30	9	0.13	15	0.13	15	0.27	31	0.26	30
8'	4	6.7	25	0.48	32	0.30	9	0.18	21	0.18	21	0.36	41	0.35	40
10'	4	6.7	25	0.48	32	0.30	9	0.23	26	0.23	26	0.45	52	0.43	50
12'	6	6.7	25	0.72	48	0.30	9	0.27	31	0.27	31	0.54	62	0.52	60
22.5 OS	1	4	NA	1.8	48	0.30	9	0.27	31	0.27	31	0.54	62	0.52	60
90° OS	2	6.7	20	0.24	16	N/A	N/A	0.04	5	0.04	5	0.09	10	0.26	30

red dot indicates  
standard self back  
blue dot indicates  
standard self side  
green dot indicates  
standard self front  
yellow dot indicates  
standard self top  
purple dot indicates  
standard self bottom  
orange dot indicates  
standard self left  
grey dot indicates  
standard self right  
pink dot indicates  
standard self middle  
light blue dot indicates  
standard self center  
dark blue dot indicates  
standard self deep

## OPTIONAL HIGH OUTPUT LED LIGHTS (115 VOLT)

CASE LENGTH	CANOPY LIGHTS H.O. LED		OPTIONAL SHELF H.O. LED		MAX. H.O. LED LOAD	
	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
4'	0.13	15	0.26	30	0.40	46
5'	0.11	13	0.23	26	0.34	39
6'	0.23	26	0.45	52	0.68	78
8'	0.26	30	0.53	61	0.79	91
10'	N/A	N/A	N/A	N/A	N/A	N/A
12'	0.40	46	0.79	91	1.19	137
22.5 OS	N/A	N/A	N/A	N/A	N/A	N/A
90° OS	N/A	N/A	N/A	N/A	N/A	N/A

# Spec Sheet (Cont'd)



## SELF-SERVICE DELI


HUSSMANN - Q2-SS-S

**DOE 2017**  
Energy Efficiency Compliant

Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards.


REVISION DATE 09/01/22

**Q2-SS-S**

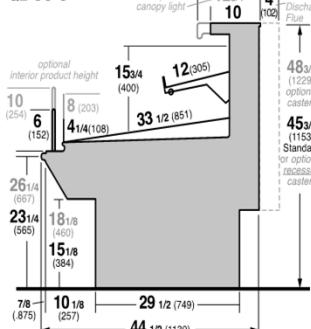

**Q2-SS-S, Q3-SS-S**

Self Service Self-Contained

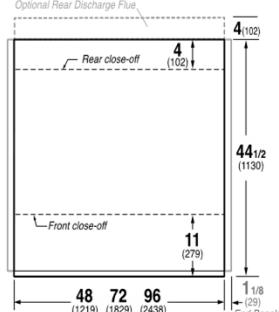

### REFRIGERATION DATA:

CASE LENGTHS	CASE USAGE	CONVENTIONAL CAPACITY ** (BTU/HR/FT)	DISCHARGE AIR * (°F)	VELOCITY (FT/MIN)
3' 4' 6' 8'	SS DELI	830	26~32	150~200

\*FRONT DISCHARGE AIR MEASURED INSIDE AIR CURTAIN HONEYCOMB

\*\*REFRIGERATION NOTES:

- 1) CAPACITY FOR REFERENCE ONLY
- 2) USE DEW POINT FOR HIGH GLIDE REFRIGERANTS. CARE SHOULD BE TAKEN TO USE THE DEW POINT IN P/T TABLES FOR MEASURING AND ADJUSTING SUPERHEAT.
- 3) RATING CONDITION IS NSF TYPE I, 75°F/55% RH

### REFRIGERATION DATA CONTINUED:

CONTROLLER / AIR SENSOR SETTINGS		DEFROS	FAILSAFE TIME (MIN)	DEFROST FREQUENCY (#/DAY)	TERM. TEMP (°F) AIR	Drip TIME (MIN)	DEFROST WATER (LBS/DAY/FT)
USAGE	SET POINT (°F)	DIFFERENTIAL (°F)	TYPE	(MIN)	(#/DAY)	(°F)	(LBS/DAY/FT)
DELI	24	8	OFF TIME	50	4	48	NA
MEAT	20	8					4.2

END PANEL WIDTH KEY		
# OF END PNLS	END PNL WIDTH (IN.)	TOTAL ADDED LENGTH (IN.)
1	1.125	1.125
2	1.125	2.25

### ELECTRICAL DATA:

STANDARD FANS, HEATERS, LED LIGHTS (115 VOLT)

CASE LENGTH	EVAPORATOR FANS				CANOPY LIGHTS LED		OPTIONAL LED SHELF LIGHTS		MAX. LED LOAD (W/ ALL OPTIONS)		ANTI-SWEAT HEATERS		CONVENIENCE OUTLETS (OPTIONAL)			
	# OF EVAP FANS	BLADE DIA. (IN.)	BLADE PITCH (°)	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS	OUTLETS	VOLTS	AMPS
2'	1	6.7	15	0.12	8	0.0	5	0.09	10	0.1	15	0.17	20	N/A	N/A	N/A
3'	2	6.7	15	0.24	16	0.1	8	0.13	15	0.2	23	0.17	20	N/A	N/A	N/A
4'	2	6.7	15	0.24	16	0.1	10	0.18	21	0.3	31	0.17	20	N/A	N/A	N/A
6'	3	6.7	15	0.36	24	0.1	15	0.13	15	0.3	31	0.26	30	N/A	N/A	N/A
8'	4	6.7	15	0.48	32	0.2	21	0.18	21	0.4	41	0.35	40	N/A	N/A	N/A

CONDENSING UNIT AND EVAPORATIVE PANS

CASE LENGTH	CONDENSING UNIT				EVAPORATIVE PAN			EST. REFG. CHRG. (LBS)	NEMA PLUG	
	NOM. HP	REFRIG.	Hz/Ph	VOLTS	RLA	VOLTS	AMPS	WATTS		
2'	1/4	R-404A	60/1	115	8.0	115	8.3	1000	2.2	L5-30P
3'	1/2		60/1	115	9.2	115	8.3	1000	2.5	L5-30P
4'	1/2		60/1	115	10.5	115	8.3	1000	3.7	L5-30P
6'	3/4		60/1	240	9.0	208/230	6.3	1500	5.6	L14-30P
8'	1		60/1	240	10.0	208/230	6.3	1500	6.6	L14-30P
2'	1/4	R-448A	60/1	115	8.0	115	8.3	1000	2.2	L5-30P
3'	1/3		60/1	115	7.2	115	8.3	1000	2.5	L5-30P
4'	1/2		60/1	115	10.0	115	8.3	1000	2.2	L5-30P
6'	3/4		60/1	240	9.0	208/230	6.3	1500	3.0	L14-30P
8'	1		60/1	240	9.3	208/230	6.3	1500	3.7	L14-30P

OPTIONAL HIGH OUTPUT LED LIGHTS (115 VOLT)

CASE LENGTH	CANOPY LIGHTS		OPTIONAL SHELF		MAX. H.O. LED LOAD	
	AMPS	WATTS	AMPS	WATTS	AMPS	WATTS
2'	N/A	N/A	N/A	N/A	N/A	N/A
3'	0.1	13	0.3	34	0.4	47
4'	0.1	15	0.4	41	0.5	56
6'	0.4	47	0.5	63	1.0	110
8'	0.3	30	0.4	51	0.7	81

## 8. Electrical

### Wiring Color Code

#### Standard Case Wire Color Code

Color Description	Color
Ground	Green
Anti-Sweat	Purple
Lights	Orange
Receptacles	Yellow
T-Stat/Solenoid 230VAC	Red/Black
T-Stat/Solenoid 115VAC	White/Black
T-Stat/Solenoid 24VAC	Red/White
Fan Motors	Brown
Blue Condensing Unit	

Use Copper Conductors Only  
430-01-0338 R101003

#### CASE MUST BE GROUNDED

NOTE: Refer to label affixed to case to determine the actual configuration as checked in the "TYPE INSTALLED" boxes.

### Electrical Circuit Identification

Standard lighting for all refrigerated models will be full length fluorescent lamps located within the case at the top.

The switch controlling the lights, the plug provided for digital scale, and the thermometer are located at the rear of the case mullion.

The receptacle that is provided on the exterior back of these models is intended for computerized scales with a five amp maximum load, not for large motors or other high wattage appliances. It should be wired to a dedicated circuit.

### Amperage

Field Wiring must be sized for component amperes printed on the serial plate. Actual ampere draw may be less than specified. Field wiring from the refrigeration control panel to the merchandisers is required for refrigeration thermostats. Case amperes are listed on the wiring diagram, but always check the serial plate.

### LED Driver Location

Drivers are located within the access panel that runs the length of the rear of the case.

### ASHRAE Color Code

NOTE: All other manufacturers have no standard sensor codes.

Case Control Systems SENSOR COLOR			
Manufacturer ® >	EIL	CPC	
Location			
Coil Inlet	Color	Blue	Blue
	Part#	225-01-1755	225-01-3255
Coil Outlet	Color	Red	Red
	Part#	225-01-1757	225-01-3123
Discharge Air	Color	Green	Green
	Part#	225-01-1756	225-01-3260
Return Air	Color	Purple	Green
	Part#	225-01-1758	225-01-3260
Defrost Term.	Color	White	Orange
	Part#	225-01-0650	225-01-3254
Liquid Line	Color	White	Blue
	Part#	225-01-0650	225-01-3255



#### BEFORE SERVICING

ALWAYS DISCONNECT ELECTRICAL  
POWER AT THE MAIN DISCONNECT  
WHEN SERVICING OR REPLACING ANY  
ELECTRICAL COMPONENT.

This includes (but not limited to) Fans, Heaters  
Thermostats, and Lights.

### Field Wiring and Serial Plate

## 9.Wiring Diagrams Index


Q2-SS-4-R	4'	3013766
Q2-SS-5-R	5'	3013767
Q2-SS-6-R	6'	3013768
Q2-SS-8-R	8'	3013769
Q2-SS-10-R	10'	3070612
Q2-SS-12-R	12'	3013770
Q2-SS-22.5O-R		3070795
Q2-SSN-90OR		3155229
Q2-SS-2S R-448A	2'	3126632
Q2-SS-3S R-404A/448A	3'	3126633
Q2-SS-4S R-448A	4'	3126635
Q2-SS-6S R-448A	6'	3126636
Q2-SS-8S R-404A/448A	8'	3126638
Q2-SS-2-S W/XR75 CTLR	2'	3157126
Q3-SS-4S W/XR75 CTLR	4'	3156674
Q3-SS-6S W/XR75 CTLR	6'	3157153
Q3-SS-8-S W/XR75 CTLR	8'	3156422

REVISION HISTORY					
REV	ECN	DATE	REV BY	CHG BY	APPR BY
A	ECN-CAP-2003236	2016/08/23	RELEASED TO PRODUCTION	CB	CB
B	ECN-C00-2015276	2012/02/18	NEW LIGHTS	CB	CB
C	ECN-C00-2018444	2013/09/28	CHANGED TANK & LIGHTS	CB	CB

SHELF LIGHT CANOPY LIGHT




OPTIONAL:  
LIGHT CIRCUIT .22A 23.6W @120V


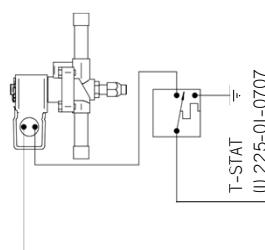


SUCTION SOLENOID

OPTIONAL:  
ANTI-SWEAT HTR  
0495009  
20 WATTS  
0.17AMP@120V

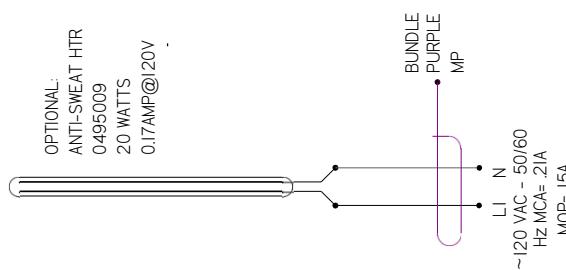

NOTES  
CASE MUST BE GROUNDED  
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED  
ANTI-SWEAT HEATERS ARE USED ONLY IF THERE IS NO CANOPY LIGHT

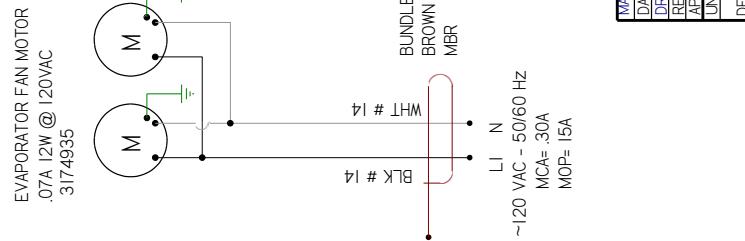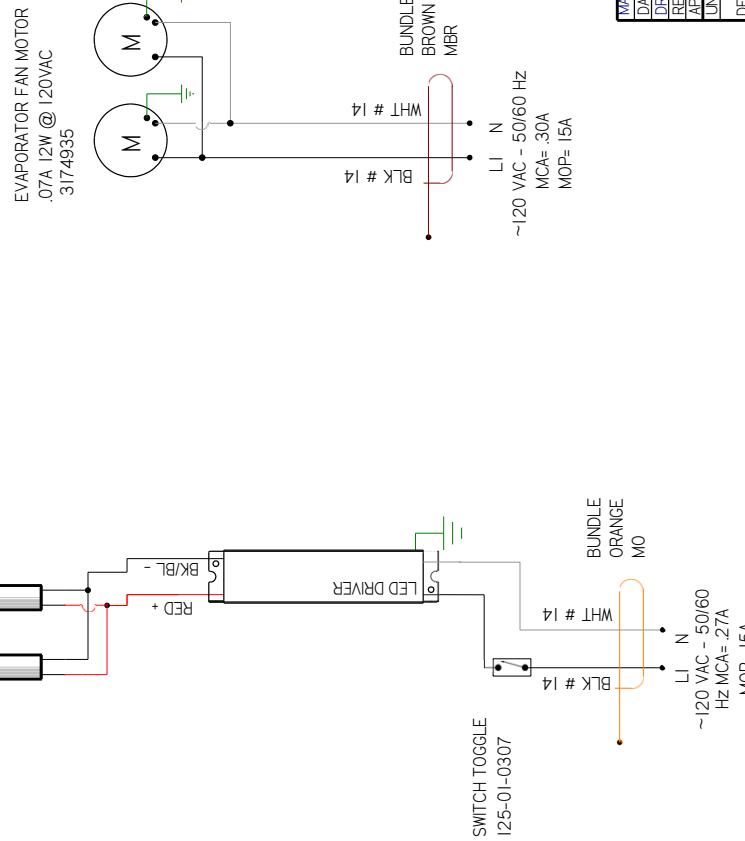

MATERIAL = N/A  
DATE DRAWN = 8-23-16  
DRAWN BY -CRAIG BOOREY  
REVIEWED BY -CRAIG BOOREY  
APPROVED BY -CRAIG BOOREY  
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.  
DECIMALS XX ±.03, XXX ±.010  
ANGLES ±2°

HUSSMANN  
DIAGRAM-Q2-SS-4-R

REF -  
SHEET 1 OF 1  
THIRD ANGL E  
PROJECTION


3013766 | C




REVISION HISTORY					
REV	ECN	DATE	REV BY	CHG BY	APPR BY
A	ECN-CAP-2003236	2016/06/23	RELEASED TO PRODUCTION	CB	CB
B	ECN-COO-2015276	2017/02/18	NEW LIGHTS	CB	CB
C	ECN-COO-2018444	2018/09/28	CHANGED FANS & LIGHTS	CB	CB
D	ECN-COO-2018715	2019/01/01	NEW FAN MOTORS	CB	CB



OPTIONAL:  
LIGHT CIRCUIT .29A 31.8W @ 120V

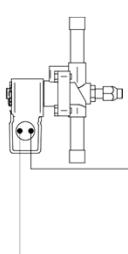


OPTIONAL:  
ANTI-SWEAT HTR  
TBD  
25 WATTS  
0.23 AMP @ 120V

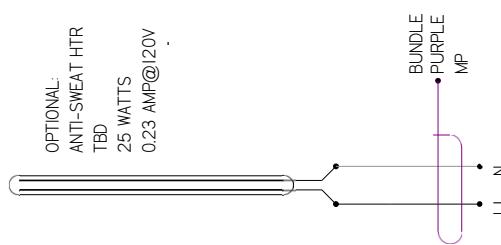

BUNDLE  
PURPLE  
MP

Li N  
~120 VAC - 50/60  
Hz MCA= .29A  
MOP= 15A

EVAPORATOR FAN MOTOR  
.08A 12W @ 120VAC  
3172574



BLK # 14  
BUNDLE  
BROWN  
MBR

Li N  
~120 VAC - 50/60 Hz  
MCA=.20A  
MOP=.15A

BLK # 14  
WHITE # 14  
BUNDLE  
WHITE/BLACK

Li N  
~120 VAC - 50/60  
Hz MCA=.18A  
MOP=.15A

BLK # 14  
WHT # 14  
BUNDLE  
ORANGE  
MO

Li N  
~120 VAC - 50/60  
Hz MCA=.37A  
MOP=.15A

SWITCH TOGGLE  
125-01-0307

NOTES  
CASE MUST BE GROUNDED  
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED  
ANTI-SWEAT HEATERS ARE USED ONLY IF THERE IS NO CANOPY LIGHT

HUSSMANN  
DIAGRAM-Q2-SS-5-R

MATERIAL = N/A  
DATE DRAWN = 8-23-16  
DRAWN BY -CRAIG BOOREY  
REVIEWED BY -CRAIG BOOREY  
APPROVED BY -CRAIG BOOREY  
SHEET 1 OF 1  
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.  
DECIMALS XX ±.03, XXX  
±.010  
ANGLES ± 2°

REF -  
THIRD ANGL E  
PROJECTION

3013767 D




REV	ECN	DATE	REV BY	CHD BY	APPR BY
A	ECN-CAP-2003236	2016/06/23		CB	CB
B	ECN-COO-2015276	2012/02/18	NEW LIGHTS	CB	CB
C	ECN-COO-2018444	2013/08/28	CHANGED TANK & LIGHTS	CB	CB

SHELF LIGHTS	CANOPY LIGHTS
3 LED LIGHT-NUA	3 LED LIGHT-NUA
3 LED LIGHT-NUA	3 LED LIGHT-NUA
3 LED LIGHT-NUA	3 LED LIGHT-NUA




OPTIONAL:  
LIGHT CIRCUIT 3.4A 36.8W @ 120V

OPTIONAL:  
ANTI-SWEAT HTR  
049-006  
30 WATTS  
0.27 AMP@120V

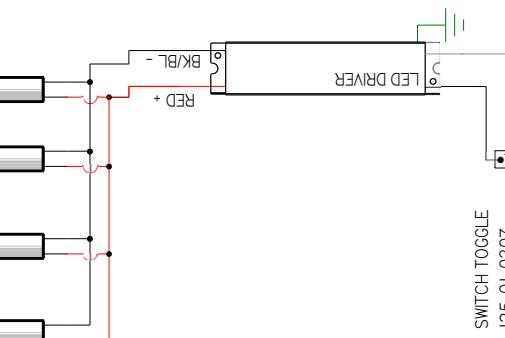


BUNDLE  
PURPLE  
MP  
LI N  
~120 VAC - 50/60  
Hz MCA=.34A  
MOP= 15A

EVAPORATOR FAN MOTOR  
.07A 12W @ 120VAC  
(3) 3174936

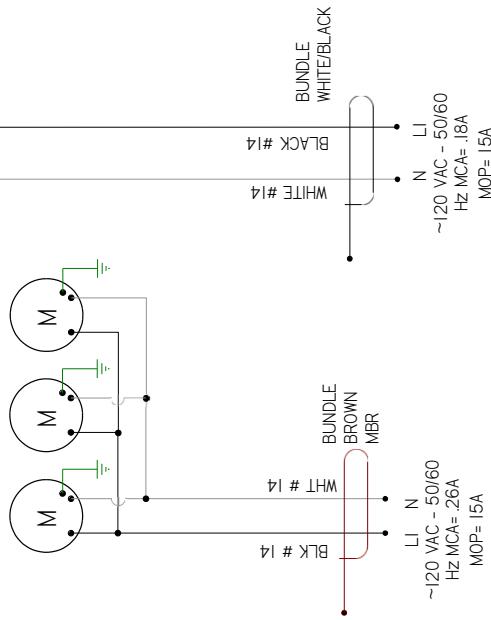


BUNDLE  
ORANGE  
MO  
LI N  
~120 VAC - 50/60  
Hz MCA=.43A  
MOP= 15A

SUCTION SOLENOID

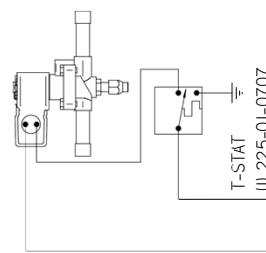

T-STAT  
(II) 225-01-0707

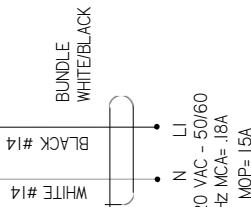

BUNDLE  
WHITE/BLACK  
BLACK # 14  
WHITE # 14  
LI N  
~120 VAC - 50/60  
Hz MCA=.18A  
MOP= 15A

**Hussmann**  
DIAGRAM-Q2-SS-6-R

MATERIAL = N/A  
DATE DRAWN = 8-23-16  
DRAWN BY - CRAIG BOOREY  
REVIEWED BY - CRAIG BOOREY  
APPROVED BY - CRAIG BOOREY  
SHEET 1 OF 1  
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.  
THIRD ANGL E  
DECIMALS XX ±.03, XXX ±.010  
ANGLES ± 2°

3013768 | C  
PROJECTION




NOTES  
CASE MUST BE GROUNDED  
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED  
ANTI-SWEAT HEATERS ARE USED ONLY IF THERE IS NO CANOPY LIGHT

REV	ECN	DATE	REV BY	CHD BY	APP BY
A	ECN-CAP-0033286	2016/06/23		CB	CB
B	ECN-CAP-0049446	2018/11/12	ADDED OPTIONAL, FAN & LIGHTS	CB	CB
C	ECN-CAP-0052776	2019/02/18	NEW LIGHTS	CB	CB
D	ECN-CAP-0058444	2019/02/28	CHANGED FANS & LIGHTS	CB	CB

REVISION HISTORY

SUCTION SOLENOID

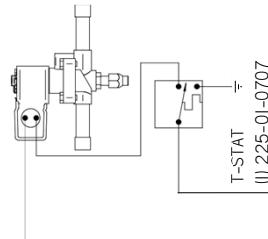

T-STAT  
II 225-01-0707

CIRCUIT # 2 (optional)

NOTE FOR GFCI PROTECTION IF MORE THAN ONE SINGLE RECEPTACLE IS USED IN CONJUNCTION WITH A GFCI DUPLEX RECEPTACLE DOWNSTREAM ON THE LOAD SIDE, THE SUM OF ALL RECEPTACLES SHOULD NOT BE MORE THAN 15A



BUNDL  
E  
YELL  
WYL

ALL SINGLE  
RECEPTACLES TO BE  
TIED TO DUPLEX GFCI  
RECEPTACLE


BLK # 14  
WHT # 14  
INCOMING POWER  
~120 VAC - 60 Hz

LOAD SIDE POWER  
RECEPTACLE  
125-01-0443 (OPTIONAL)  
~120 VAC - 60 Hz

SHELF LIGHTS

LIGHT CIRCUIT .44A 47.2W @ 120V

OPTIONAL:



4 LED LIGHT

NCA

4 LED LIGHT

NCA

4 LED LIGHT

NCA

4 LED LIGHT

NCA

CIRCUIT #1

LOADING

120V

L1

H

N

M


GND

EVAPORATOR FAN MOTOR  
.07A 12W @ 120VAC  
(4) 3174935

TS2-GAR-I  
IH87361550

OPTIONAL:  
ANTI-SWEAT HTR  
0495-007  
40 WATTS  
0.33 AMP @ 20V


POWER SUPPLY



BLK # 14

BUNDLE  
YELLOW  
WYL

PLUG NEMA 5-15P



BLK # 14  
WHT # 14  
BUNDLE  
BROWN  
MBR

BLK # 14  
WHT # 14  
BUNDLE  
ORANGE  
MO

BLK # 14  
WHT # 14  
SWITCH TOGGLE  
125-01-0307

BLK # 14  
WHT # 14  
~120 VAC - 50/60  
Hz MCA= 35A  
MOP= 15A

BLK # 14  
WHT # 14  
BUNDLE  
PURPLE  
MP

BLK # 14  
WHT # 14  
~120 VAC - 50/60 Hz  
MCA= 55A  
MOP= 15A

NOTES:  
CASE MUST BE GROUNDED  
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED  
ANTI-SWEAT HEATERS ARE USED ONLY IF THERE IS NO CANOPY LIGHT

HUSSMANN  
DIAGRAM-Q2-SS-8-R  
MATERIAL = N/A  
DATE DRAWN - 8-23-16  
DRAWN BY - CRAIG BOOREY  
REVIEWED BY - CRAIG BOOREY  
APPROVED BY - CRAIG BOOREY  
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.  
DECIMALS XX ±.03, XXX  
±.010  
ANGLES ± 2°  
REF - ECN-CAP-0003236  
SHEET 1 OF 1  
THIRD ANGL  
E  
PROJECTION


3013769 | D



REV	ECN	DATE	REV BY	CHD BY	APPR BY
A	ECN-CAP-0013866	2018/08/02	RELEASED TO PRODUCTION	CB	CB
B	ECN-CAP-0014946	2018/11/12	ADDED OPTIONAL THERMAL-SAMPLE	CB	CB
C	ECN-CAP-00165276	2019/02/18	NEW LIGHTS	CB	CB
D	ECN-CAP-0018444	2019/02/28	CHANGED FANS & LIGHTS	CB	CB
E	ECN-CAP-0018715	2019/03/01	NEW FAN MOTORS	CB	CB

**CIRCUIT # 2 (optional)**

NOTE FOR GFCI PROTECTION IF MORE THAN ONE SINGLE RECEPTACLE IS USED IN CONJUNCTION WITH A GFCI DUPLEX RECEPTACLE 'DOWNSTREAM' ON THE LOAD SIDE, THE SUM OF ALL RECEPTACLES SHOULD NOT BE MORE THAN 15A



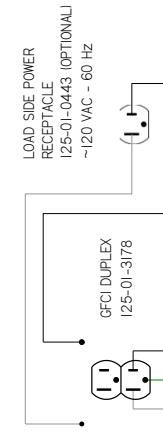


OPTIONAL  
LOADING  
120  
15.0  
V

INCOMING POWER  
~120 VAC - 60 Hz

ALL SINGLE  
RECEPTACLES TO BE  
TIED TO DUPLEX GFCI  
RECEPTACLE

LIGHT CIRCUIT = 0.59A 63.6W  
CANOPY & SHELF  
LIGHTS  
OPTIONAL:  
EDGE LIGHTS

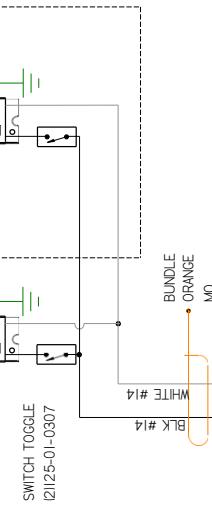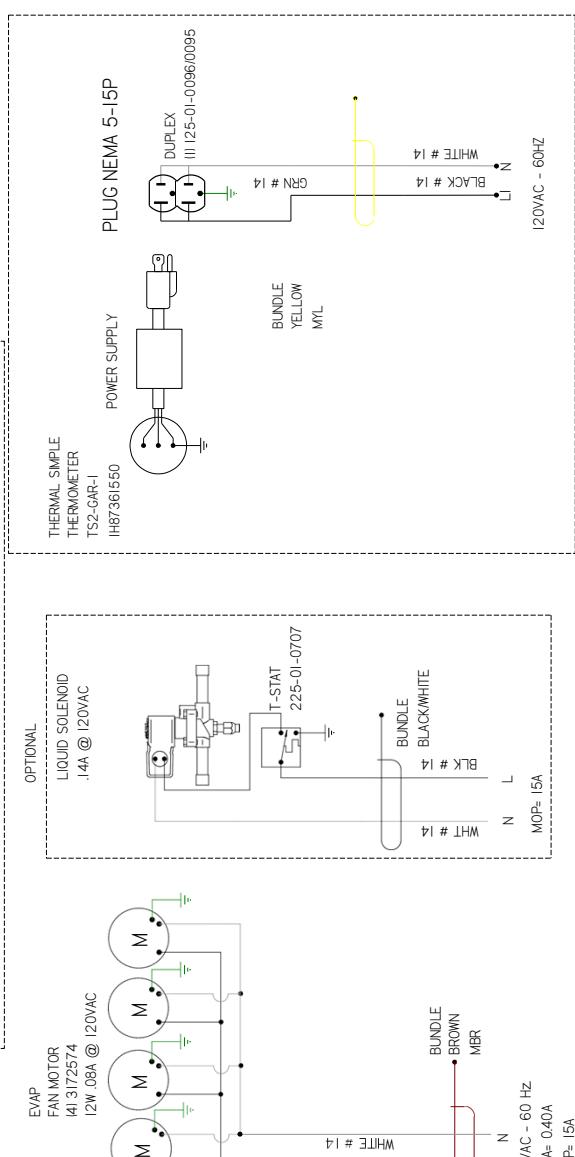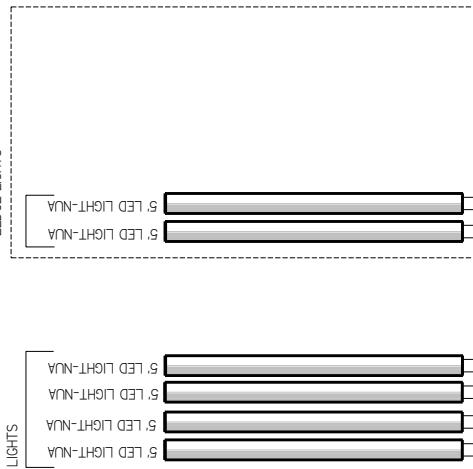

~120 VAC - 60 Hz  
MCA= 0.40A  
MOP= 15A

BLK # 14  
WHT # 14

~120 VAC - 60 Hz  
MCA= 0.74A  
MOP= 15A

BLK # 14  
WHT # 14

NOTES:  
CASE MUST BE GROUNDED  
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

**Hussmann®**  
**DIAGRAM-Q2-SS-10-R**  
REF -  
SHEET 1 OF 1  
THIRD ANGL  
PROJECTION

3070612 | E



ANGLES ± 2°

MATERIAL = NA  
DATE DRAWN 3-2-18  
DRAWN BY - CRAIG BOOREY  
REVIEWED BY - CRAIG BOOREY  
APPROVED BY - CRAIG BOOREY  
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.  
DECIMALS XX ±.03, XXX  
±.010  
ANGLES ± 2°

REV	ECN	DATE	REV BY	CHG BY	APPR BY
A	ECN-CAP-2003238	2016/06/23		CB	CB
B	ECN-COO-2015276	2012/02/18	NEW LIGHTS	CB	CB
C	ECN-COO-0018444	2013/09/28	CHANGED TANK & LIGHTS	CB	CB

SHELF LIGHTS  
CANOPY LIGHTS


4 LED LIGHT-NUA  
4 LED LIGHT-NUA  
4 LED LIGHT-NUA  
4 LED LIGHT-NUA

OPTIONAL:  
LIGHT CIRCUIT .66A 70.8W @120V





CIRCUIT #1  
LOADING  
120V  
1.4

OPTIONAL:  
ANTI-SWEAT HTR  
04-95008  
60 WATTS  
0.50 AMP@120V

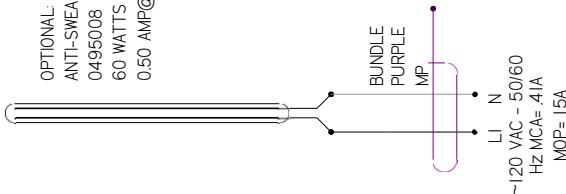

BUNDLE  
PURPLE  
MP  
N  
L1  
~120 VAC - 50/60  
Hz MCA= 41A  
MOP= 15A

EVAPORATOR FAN MOTOR  
.07A 12W @ 120VAC  
(6) 3174935

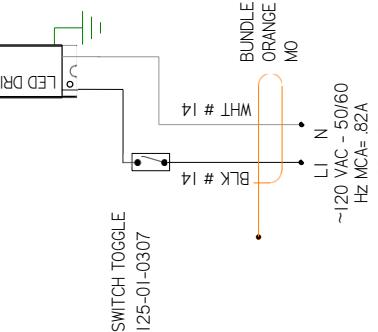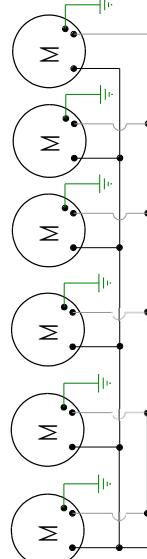


SWITCH TOGGLE  
125-01-0307


L1 N  
~120 VAC - 50/60  
Hz MCA= 53A  
MOP= 15A

BUNDLE  
ORANGE  
MO  
N  
L1  
~120 VAC - 50/60  
Hz MCA= 82A  
MOP= 15A


N  
L1  
~120 VAC - 50/60  
Hz MCA=.18A  
MOP= 15A




WHITE #14



BLACK #14




BLK # 14



BLK # 14

T-STAT  
II 225-01-0707

SUCTION SOLENOID



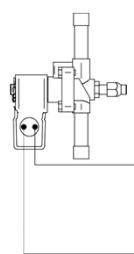


HUSSMANN®  
DIAGRAM-Q2-SS-12-R  
ECN-CAP-0003236  
REF -  
DRAWN BY - CRAIG BOOREY  
REVIEWED BY - CRAIG BOOREY  
APPROVED BY - CRAIG BOOREY  
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.  
DECIMALS XX ±.03, XXX  
±.010  
ANGLES ± 2°  
MATERIAL = N/A  
DATE DRAWN - 8-23-16  
DRAFTED BY - CRAIG BOOREY  
REVIEWED BY - CRAIG BOOREY  
APPROVED BY - CRAIG BOOREY  
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.  
DECIMALS XX ±.03, XXX  
±.010  
ANGLES ± 2°  
PROJECTION  
C  
3013770

NOTES  
CASE MUST BE GROUNDED  
WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED  
ANTI-SWEAT HEATERS ARE USED ONLY IF THERE IS NO CANOPY LIGHT





REVISION HISTORY					
REV	ECN	DATE	REV BY	CHG BY	APPR BY
A	ECN-CAP-001/3866	20/03/09/02	RELEASED TO PRODUCTION	CB	CB

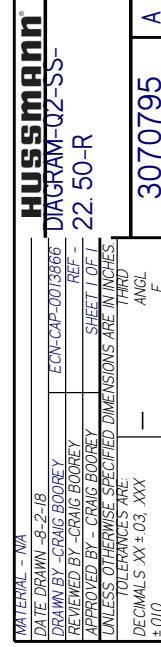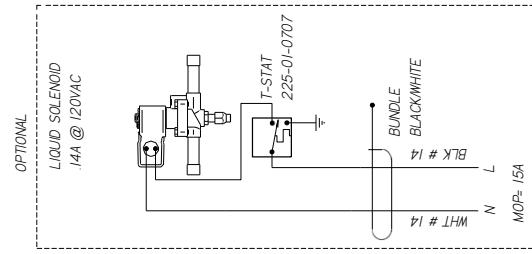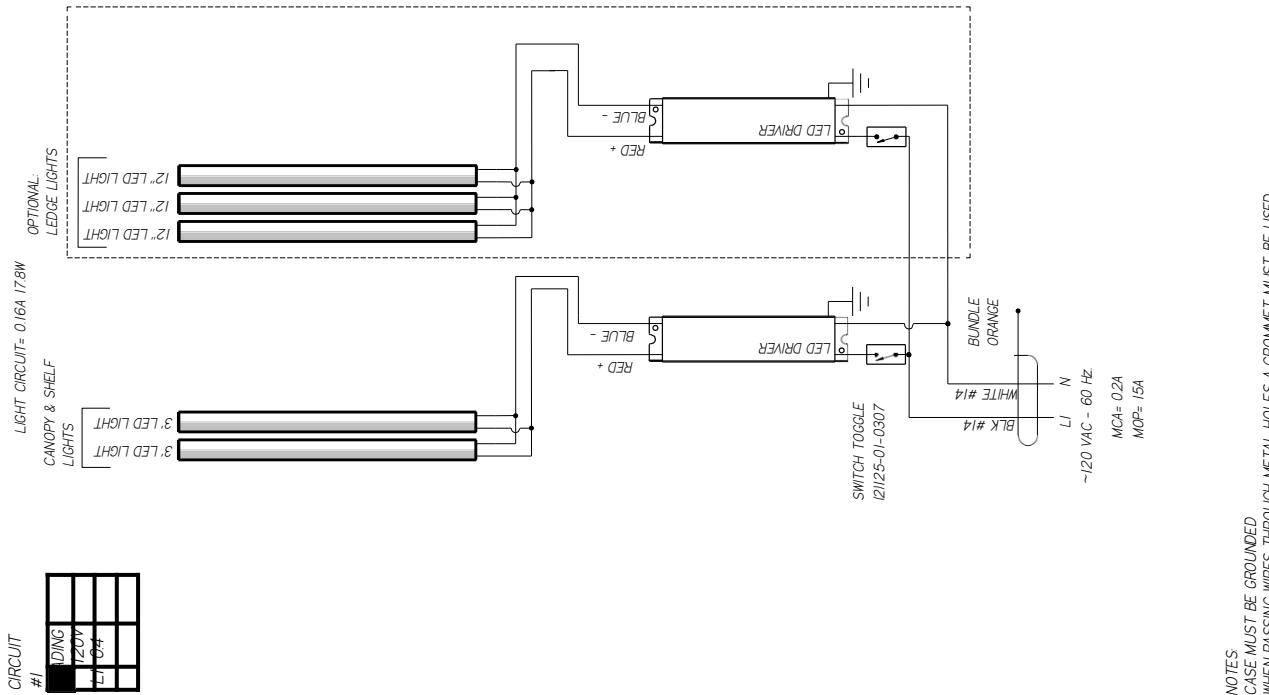


CIRCUIT #:  
LOADING  
120V  
L1 225

LIGHT CIRCUIT= 0.11A 123W  
SHELF LIGHTS CANOPY LIGHTS

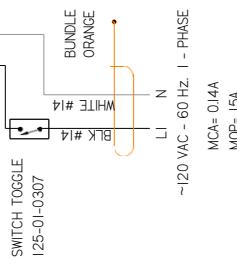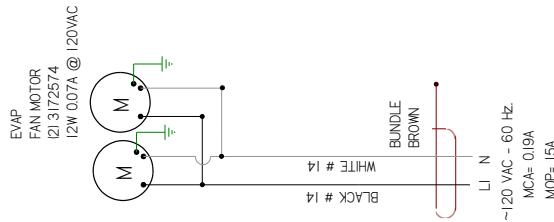


REVISION HISTORY				
REV	ECN	DATE	REVISION DESCRIPTION	REV BY APPR BY
B	ECN-COD-0018444	8-28-23	CHANGED EVAP FAN	CB CB CB
C	ECN-COD-0018715	11-1-23	NEW FAN MOTORS	CB CB CB

- NOTES:
1. PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE
  2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
  3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

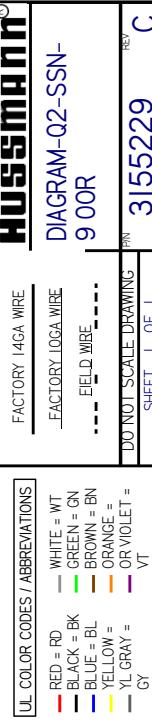

UL COLOR CODES / ABBREVIATIONS	
RED = RD	WHITE = WT
BLACK = BLK	GREEN = GN
BLUE = BL	BROWN = BN
DARK BLUE = DBL	ORANGE = OR
PURPLE = MP	VIOLET = VT
RED = LR	YL GRAY = YG
MB GREEN = MG	YL GRAY = YG
LIGHT BLUE = LB	WHT = WT

REV		ECN	DATE	REVISION HISTORY	REV BY CHGD BY APPR BY
A		ECN-COD-001/328	6-15-20	RELEASED TO PRODUCTION	CB CB CB CB
B		ECN-COD-001&44	8-28	CHANGED EVAP FAN	CB CB CB CB

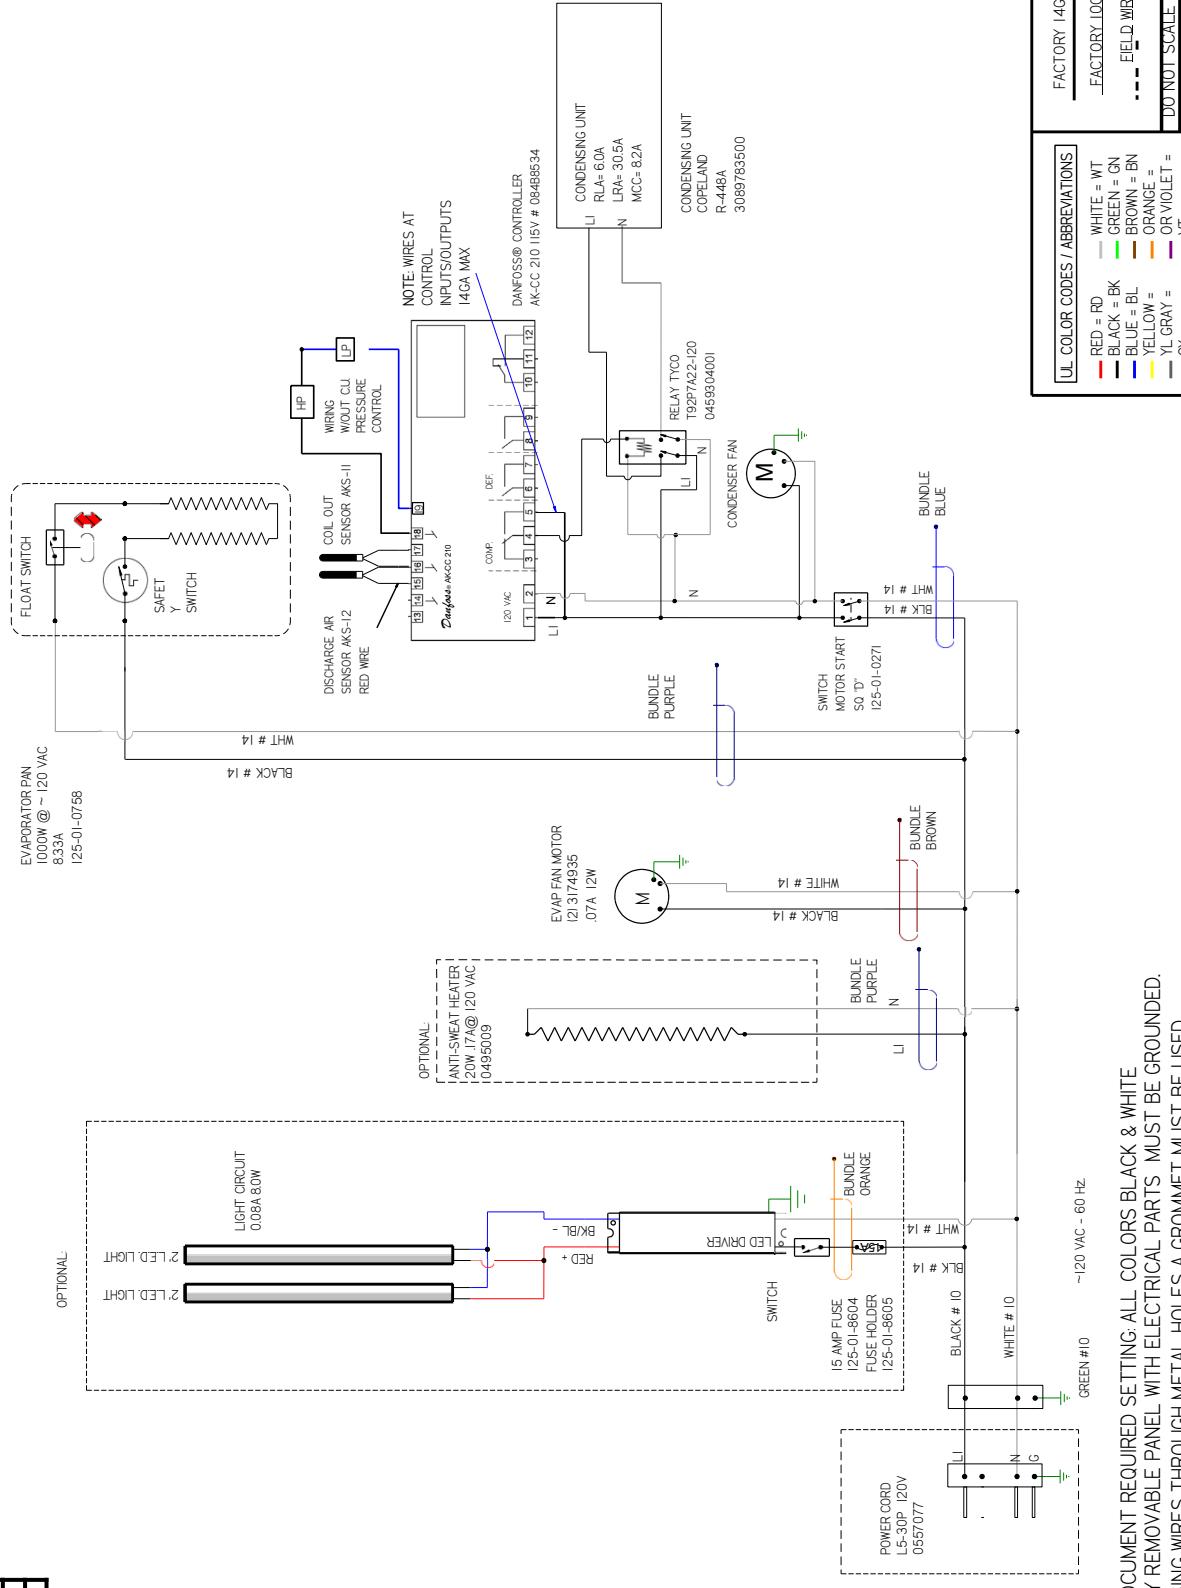

HUSSMANN  
DIAGRAM-Q2-SS-2S

ON-LINE WIRE DIAGRAM SEE C  
3126632 B

FACTORY 14GA WIRE  
-FACTORY LOGIC WIRE  
FIELD WIRE  
DO NOT SCALE DRAWING P/N SHEET 1 OF 1

UL COLOR CODES / ABBREVIATIONS  
RED = RD  
BLACK = BK  
BLUE = BL  
YELLOW = YL  
ORANGE = OR  
VIOLET = VT




## REVISION HISTORY

REV	ECN	DATE	REV BY	CHD BY	APPR BY
A	ECN-COD-001/328	6-15-20			
B	ECN-COD-001/844	8-28-23	RELEASED TO PRODUCTION	CB	CB



EVAPORATOR PAN  
1000W @ ~120 VAC  
8.33A  
125-01-0758

OPTIONAL:

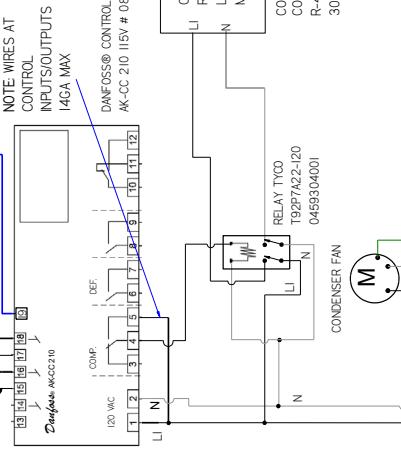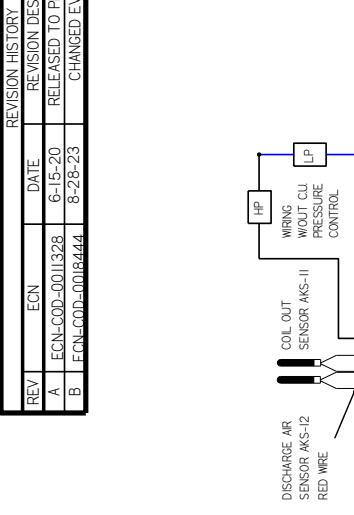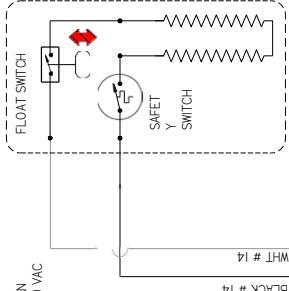

- NOTES:
- PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE
  - CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
  - WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

HUSSMANN

DIAGRAM-Q2-SS-3S

B

3126633

FACTORY 14GA WIRE

-FACTORY LOGO WIRE

-FIELD WIRE

-DO NOT SCALE DRAWING

PIN

REV

1 OF 1

SHEET 1 OF 1

REF

Q2-10 WIRE DIAGRAM C

REV	ECN	DATE	REVISION HISTORY
A	ECN-COD-001/328	6-15-20	REV BY CHKD BY APPR BY
B	ECN-COD-001/844	8-28-23	RELEASED TO PRODUCTION CB CB CB CB CB CB


CIRCUIT #1  
LOADING  
120V  
17.6W  
LIGHT CIRCUIT = 16A 17.6W  
OPTIONAL LIGHTS

EVAP PAN  
1000W 8.3A @ ~120 VAC  
H#05134550

ANTI-SWEAT HEATER  
12W 17A @ 20 VAC  
H#495009

OPTIONAL  
ANTI-SWEAT HEATER  
12W 17A @ 20 VAC  
H#495009

REV	ECN	DATE	REVISION HISTORY
A	ECN-COD-001/328	6-15-20	REV BY CHKD BY APPR BY
B	ECN-COD-001/844	8-28-23	RELEASED TO PRODUCTION CB CB CB CB CB CB

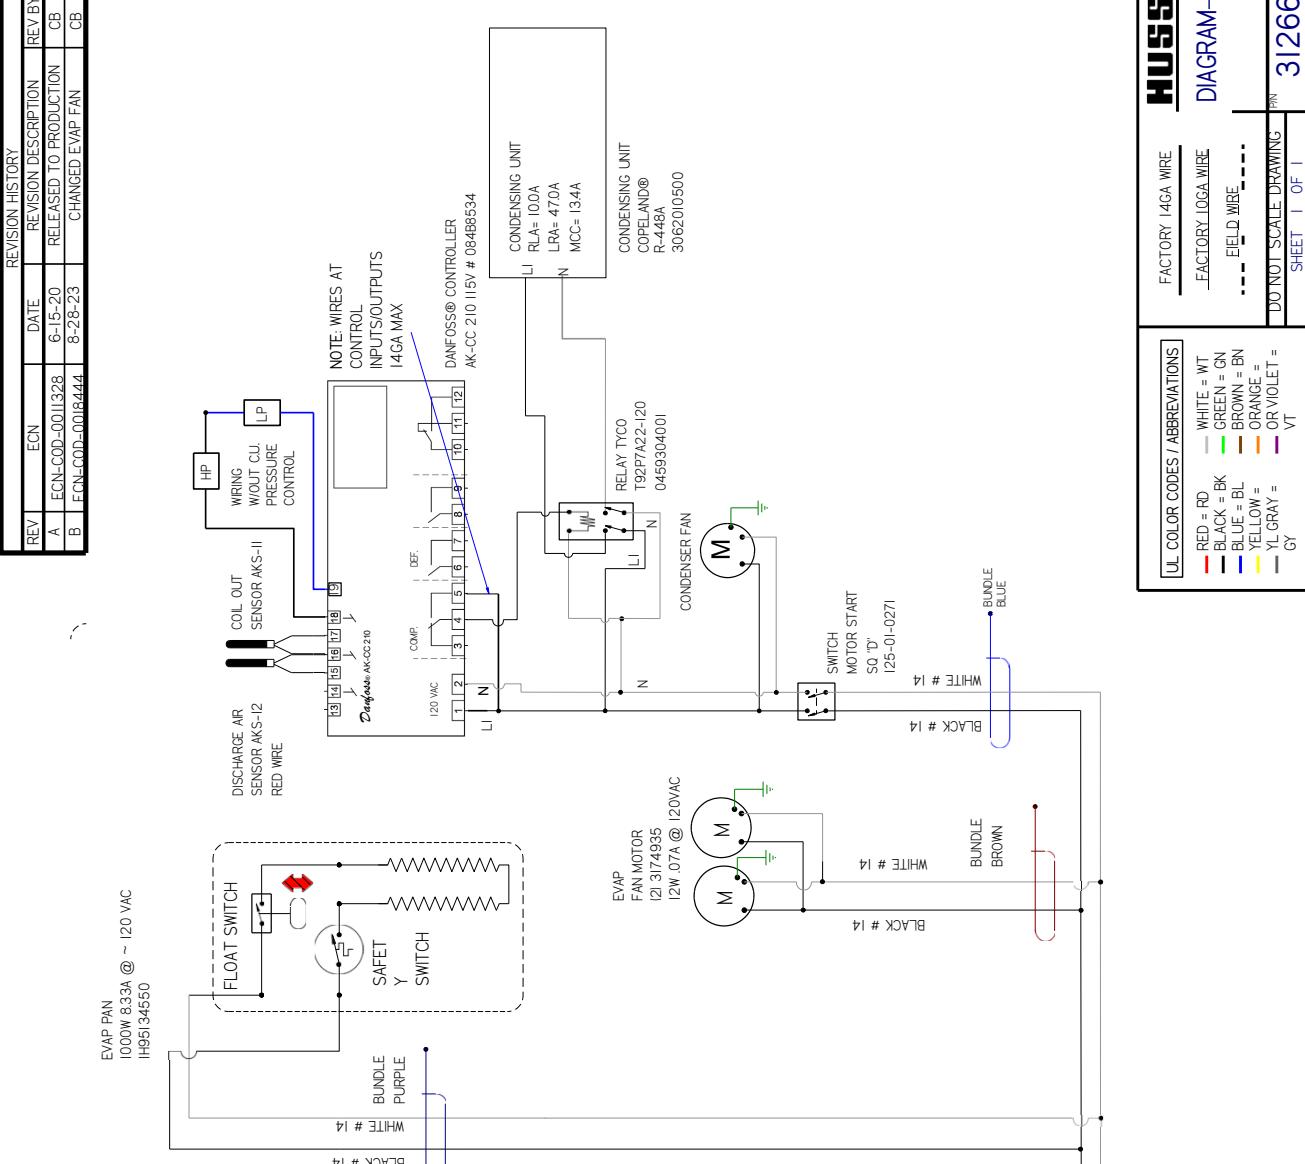

ON-LINE WIRE DIAGRAM SEE  
**HUSSMANN**  
DIAGRAM-Q2-SS-4S

REV B  
3126635  
SHEET 1 OF 1

UL COLOR CODES / ABBREVIATIONS

RED = RD	WHITE = WT
BLACK = BK	GREEN = GN
BLUE = BL	BROWN = BN
YELLOW = YL	ORANGE = OR
—	VIOLET = VT

FACTORY 14GA WIRE

—FACTORY 10GA WIRE

—FIELD WIRE

—DO NOT SCALE DRAWING

—

## REVISION HISTORY

REV	ECN	DATE	REV BY	CHGD BY	APPR BY
B	ECN-COD-0012736	3-24-21	SHOW POWER CORD AS OPTION	CB	CB
C	ECN-COD-0018444	8-28-23	CHANGED EVAP FAN	CB	CB

CIRCUIT #1  
LOADING

220V 240V	15A
15A	15A
15A	15A



OPTIONAL LIGHTS

LIGHT CIRCUIT = .24A 262W

3 LED LIGHT

3 LED LIGHT

6 LED LIGHT

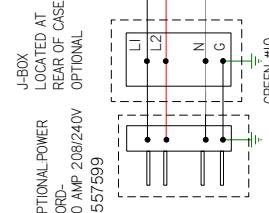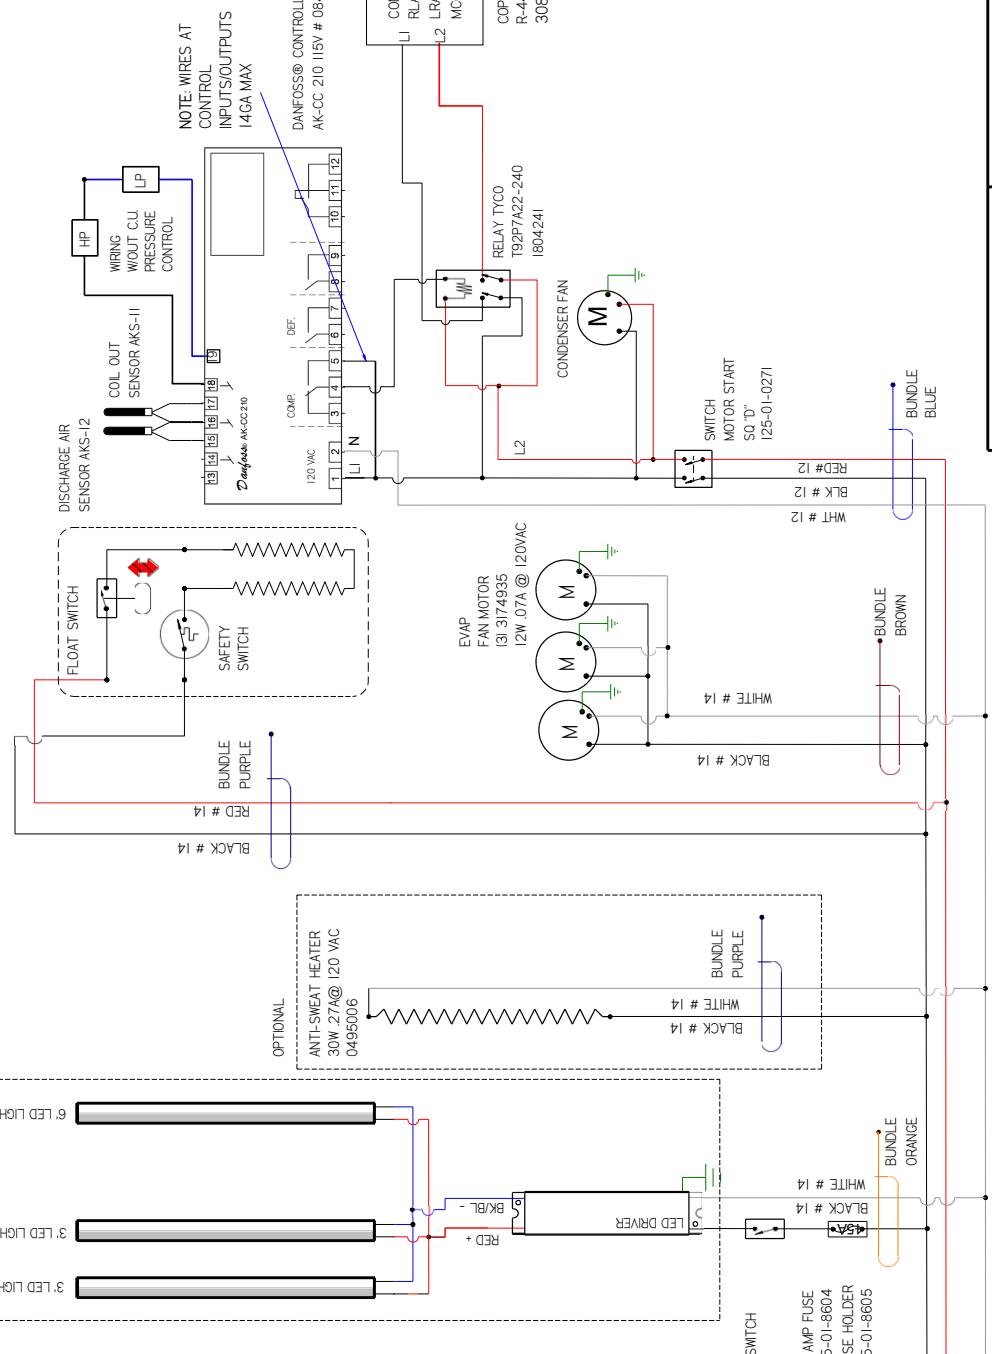EVAPORATOR PAN  
1500W 6.25A @ ~ 240 VAC  
H95137550

NOTES:

1. PRINTED DOCUMENT REQUIRED SETTING ALL COLORS BLACK & WHITE
2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

**HUSSMANN**  
DIAGRAM-Q2-SS-6S

3126636  
C

3126636  
C

3126636  
C

3126636  
C

## CIRCUIT # 1

LOADING	
208	240 V
+12	-14.3 V

OPTIONAL LIGHTS


LIGHT CIRCUIT = .4A 45W

4 LED LIGHT

4 LED LIGHT

4 LED LIGHT

4 LED LIGHT

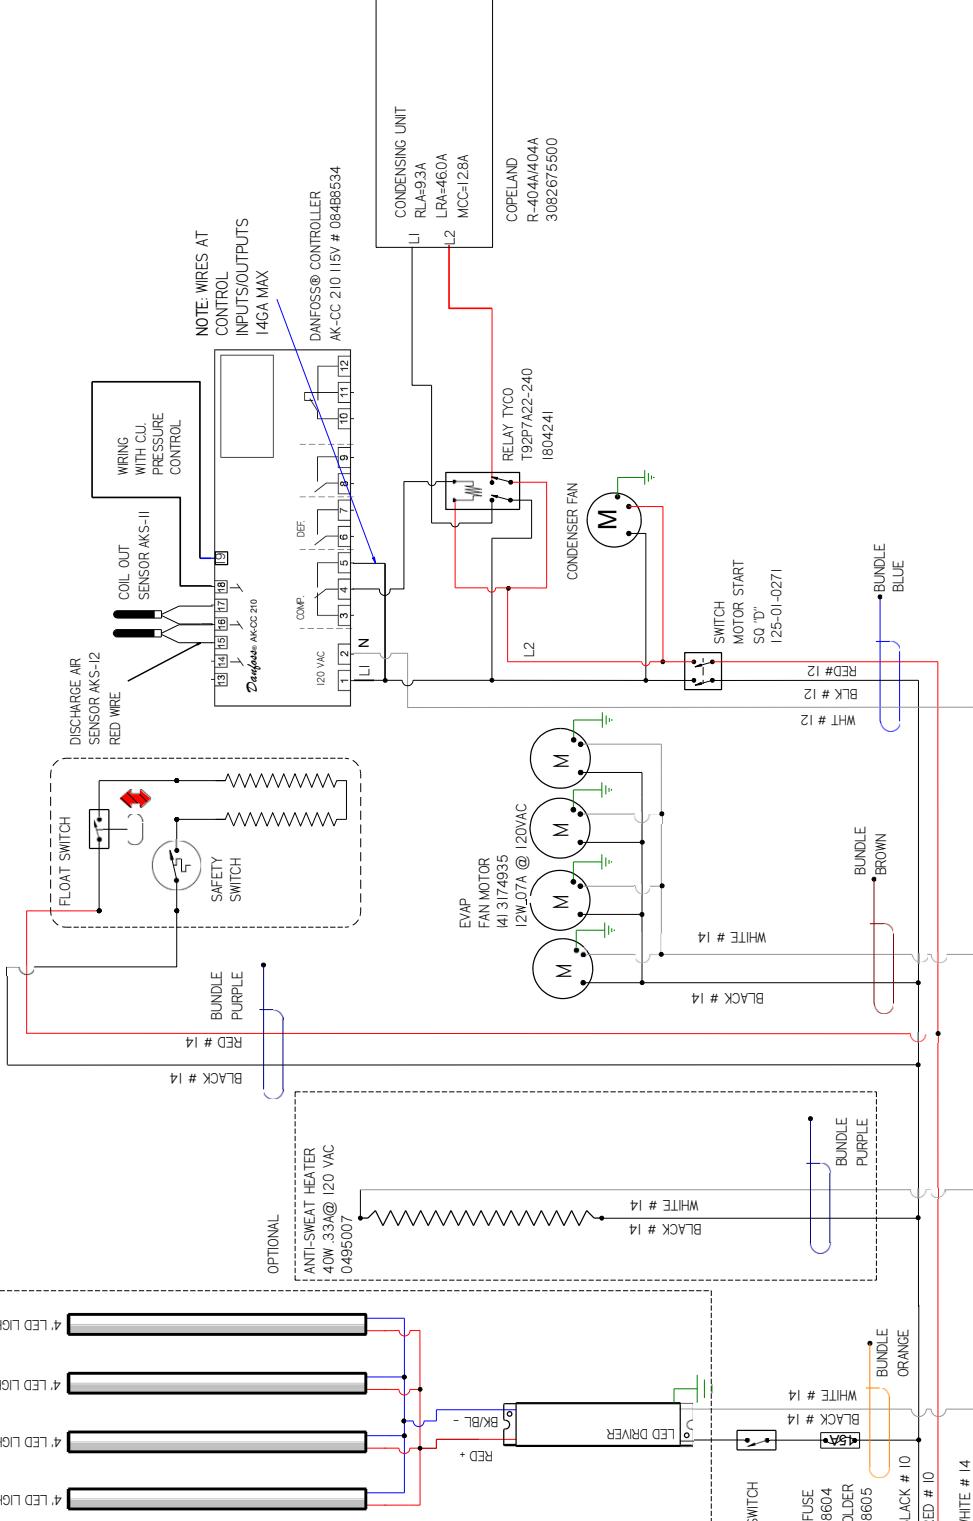EVAPORATOR PAN  
1600W 225A @ ~ 240 VAC  
1H95137550OPTIONAL  
ANTI-SWEAT HEATER  
40W 33A@ 120 VAC  
0495007


REV	ECN	DATE	REVISION HISTORY	REV BY	CHKD BY	APPR BY
A	ECN-COD-001/328	6-15-20	RELEASED TO PRODUCTION	CB	CB	CB
B	ECN-COD-001/844	8-28-23	CHANGED EVAP FANS	CB	CB	CB

REV	ECN	DATE	REVISION HISTORY	REV BY	CHKD BY	APPR BY
A	ECN-COD-001/328	6-15-20	RELEASED TO PRODUCTION	CB	CB	CB
B	ECN-COD-001/844	8-28-23	CHANGED EVAP FANS	CB	CB	CB

NOTE: WIRES AT  
WIRING WITH CU.  
PRESSURE  
CONTROLINPUTS/OUTPUTS  
14GA MAXDISCHARGE AIR  
SENSOR KXS-12  
RED WIRECOIL OUT  
SENSOR AKS-IIDANFOSS® CONTROLLER  
AK-CC 210 115V # 084BB534CONDENSING UNIT  
RLA=9.3A  
RA=460A  
MCC=128A  
COPELAND  
R-404AA/404A  
3082675500RELAY TICO  
T922P/A22-240  
180-0241CONDENSER FAN  
DEF120 VAC  
1 2 NSWITCH  
MOTOR START  
SQ D  
125-01-0271EVAP  
FAN MOTOR  
141 3174935  
12W/0.7A @ 120VACWHITE # 14  
BLACK # 14WHITE # 14  
BLACK # 14WHITE # 14  
BLACK # 14WHITE # 14  
BLACK # 10  
RED # 10  
WHITE # 14SWITCH  
LED DRIVER  
BLACK # 10  
RED # 10  
WHITE # 1416 AMP FUSE  
125-01-8604  
FUSE HOLDER  
125-01-8605POWER CORD-10'  
L14-30P 208/240V  
055-01-8605SWITCH  
MOTOR START  
RED # 12  
WHITE # 12  
BLACK # 12  
BUNDLE  
BLUEEVAP  
FAN MOTOR  
141 3174935  
12W/0.7A @ 120VACWHITE # 14  
BLACK # 14WHITE # 14  
BLACK # 14WHITE # 14  
BLACK # 14WHITE # 14  
BLACK # 10  
RED # 10  
WHITE # 14SWITCH  
LED DRIVER  
BLACK # 10  
RED # 10  
WHITE # 1416 AMP FUSE  
125-01-8604  
FUSE HOLDER  
125-01-8605POWER CORD-10'  
L14-30P 208/240V  
055-01-8605UL COLOR CODES / ABBREVIATIONS  
RED = RD  
BLACK = BK  
WHITE = WT  
GREEN = GN  
BROWN = BN  
ORANGE = OR  
YELLOW = YL  
BLUE = BL  
VIOLET = VTFACTORY 14GA WIRE  
— FACTORY LOGA WIRE  
- - - FIELD WIRE  
DO NOT SCALE DRAWING  
SHEET 1 OF 1ON-LINE WIRE DIAGRAM SIZE C  
DIAGRAM-Q2-SS-8S  
3126638 BNOTES:  
1. PRINTED DOCUMENT REQUIRED SETTING ALL COLORS BLACK & WHITE  
2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.  
3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

## REVISION HISTORY

REV	ECN	DATE	REVISION DESCRIPTION	REV BY	APPR BY
B	ECN-COD-0015256	03-04-22	NEW LIGHTS	AL	CB
C	ECN-COD-0018444	8-28-23	CHANGED FAN & LIGHTS	CB	CB

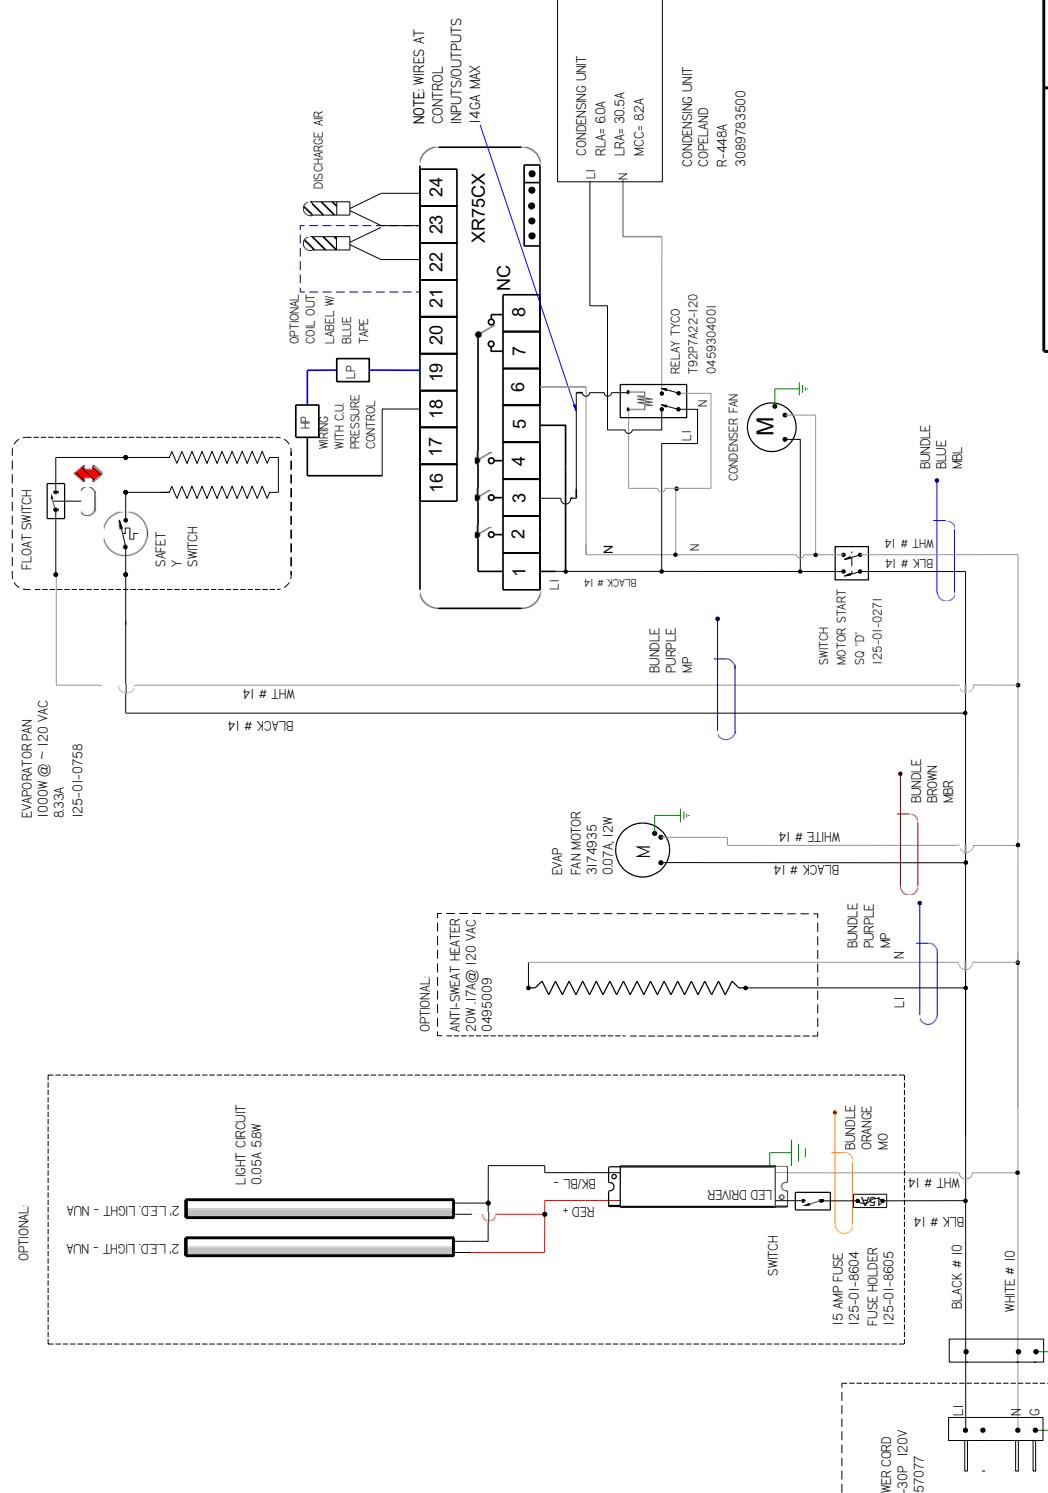

UL COLOR CODES / ABBREVIATIONS	FACTORY 14GA WIRE
RED = RD	WHITE = WT
BLACK = BK	GREEN = GN
BLUE = BL	BROWN = BN
DARK BLUE =	ORANGE =
MO PINK = MPI	RED = MR
PURPLE = MP	YEL GRAY =
MBD GREEN = MG	YEL - MYL =
MBD BLUE =	GY =

WIRE MARKER COLORS/ABBREVIATIONS	WIRE MARKER LOGIC
BLACK = MBK	WHITE = WT
BLUE = MBL	GREEN = GN
BROWN = MBR	BROWN = BN
DARK BLUE =	ORANGE =
MO PINK = MPI	RED = MR
PURPLE = MP	YEL GRAY =
MBD GREEN = MG	YEL - MYL =
MBD BLUE =	GY =

NOTES:	FACTORY LOGIC	FIELD WIRE
1. PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE	—	—
2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.	—	—
3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED	—	—

- NOTES:
- PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE
  - CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
  - WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

ON/OFF WIRE DIAGRAM SIZE C

HUSSMANN

DIAGRAM-Q2-SS-2-S WXR75 CTLR

3157126




SHEET 1 OF 1	DO NOT SCALE DRAWING
—	—

CIRCUIT #1  
LOADING  
 120V  
 230V

REV	ECN	DATE	REVISION DESCRIPTION	REV BY CHGD BY APPR BY
B	ECN-COD-0014506	10-21-21	LABELED COIL OUT SENSOR	CB CB CB
C	ECN-COD-0015256	3-4-22	NEW LIGHTS	AL CB CB
D	ECN-COD-0018448	9-25-23	CHANGED FANS & LIGHTS	CB CB CB

#### REVISION HISTORY

REV	ECN	DATE	REVISION DESCRIPTION	REV BY CHGD BY APPR BY
B	ECN-COD-0014506	10-21-21	LABELED COIL OUT SENSOR	CB CB CB
C	ECN-COD-0015256	3-4-22	NEW LIGHTS	AL CB CB
D	ECN-COD-0018448	9-25-23	CHANGED FANS & LIGHTS	CB CB CB

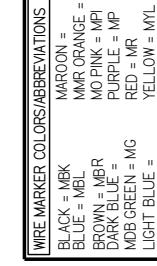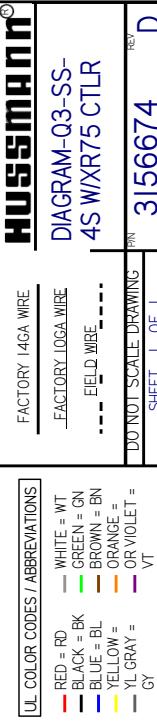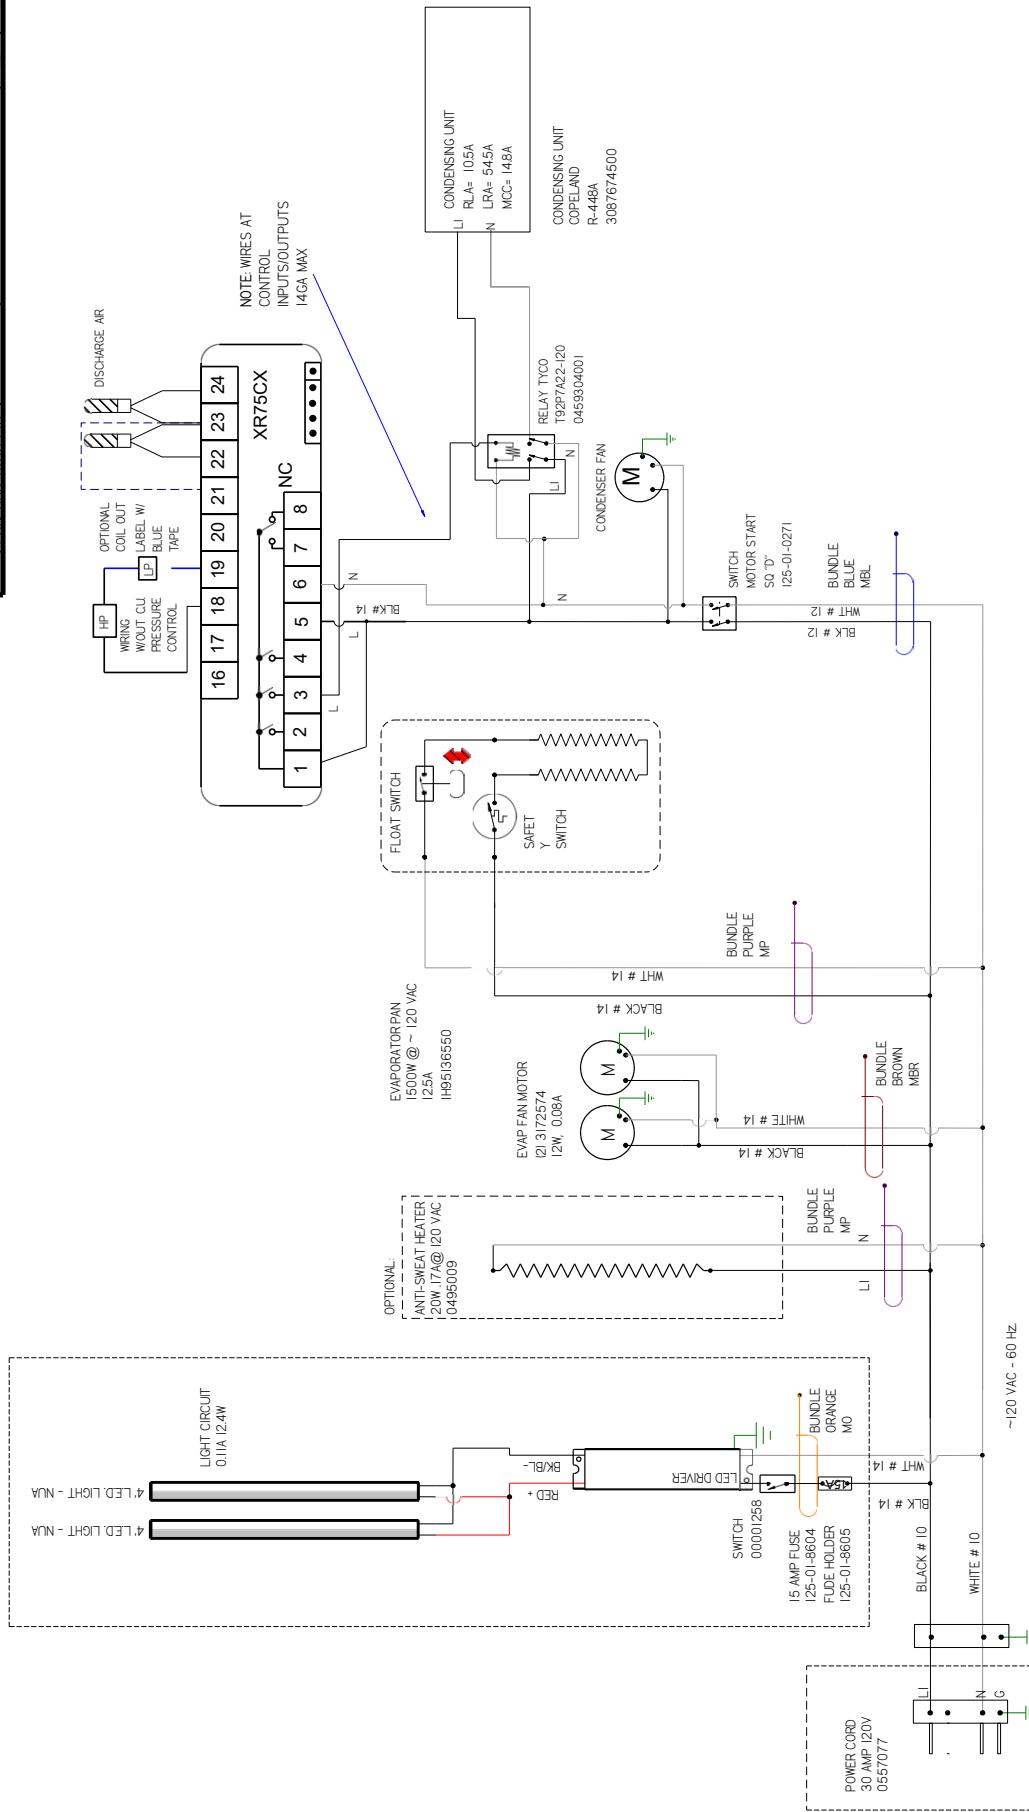

- NOTES:
- PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE
  - CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
  - WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

REV	ECN	DATE	REVISION HISTORY	REV BY CHGD BY APPR BY
D	ECN-COD-0016098	6-23-22	CHANGED RELAY	CB CB CB CB
E	ECN-COD-0018446	9-25-23	CHANGED FANS & LIGHTS	CB CB CB CB

CIRCUIT # 1


LOADING	208	240	V
L1	139	161	
L2	Y132	153	

NOTE: CASE MUST BE GROUNDED

SHELVES

CANOPY

EVAPORATOR PAN  
1500W @ ~240 VAC  
625A  
IH95137560

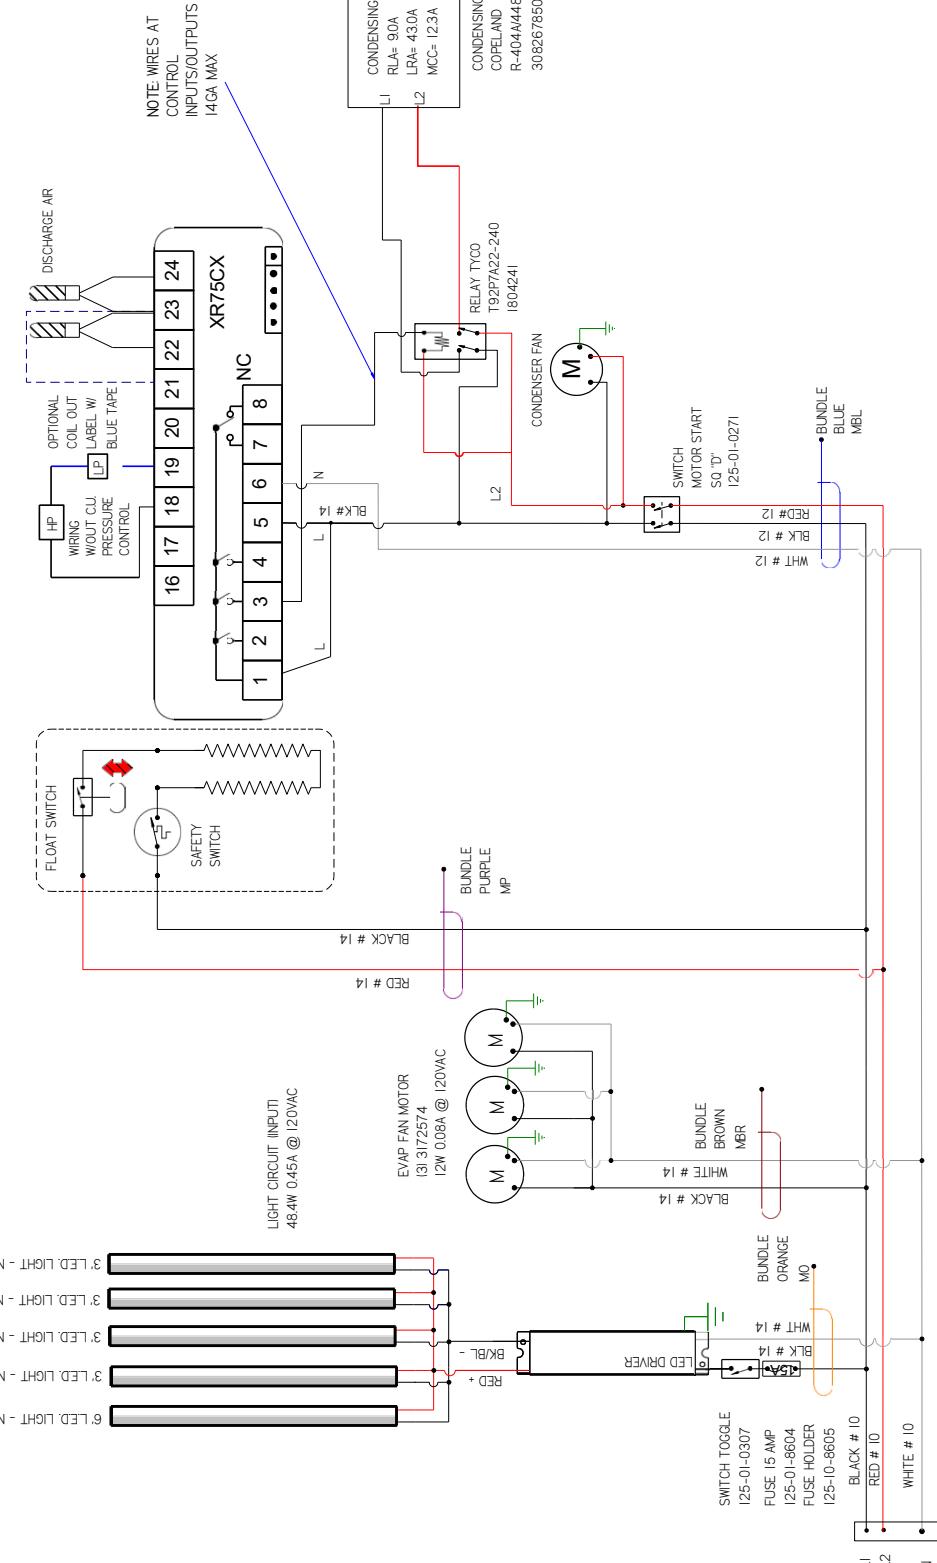

HUSSMANN

DIAGRAM-Q3-S-  
6S WXR75 CTLR

E

FACTORY 14GA WIRE

-FACTORY LOGA WIRE  
FIELD WIRE -----

DO NOT SCALE DRAWING

UL COLOR CODES / ABBREVIATIONS

BLACK = MBK	MAROON = RD	WHITE = WT
BLUE = MBL	MMR ORANGE = E	BLACK = BN
BROWN = MBR	MO PINK = MP	BROWN = BN
DARK BLUE =	DARK BLUE = DP	ORANGE =
MOB GREEN = MG	RED = MR	YL GRAY =
LIGHT BLUE =	YELLOW = YL	VT

WIRE MARKER COLORS/ABBREVIATIONS

1. PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE  
2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.  
3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

3157153

E

CIRCUIT #1  
LOADING

200Y	240
L1	45
L2	3.5
V	200

2

REV	ECN	DATE	REVISION DESCRIPTION	REV BY CHGD BY APPR BY
D	ECNL-COD-0016093	6-7-22	REVISED RELAY WIRING	CB CB CB CB
E	ECNL-COD-0016098	6-23-22	CHANGED RELAY	CB CB CB CB
F	ECNL-COD-0016048	9-26-23	CHANGED FANS & LIGHTS	CB CB CB CB

OPTIONAL LIGHTS


4 LED LIGHT - NUA

EVAPORATOR PAN  
1500W 625A @ ~ 240 VAC  
H95137550

LIGHT CIRCUIT = 34A 372W

NEEDED IF NO LIGHTS

ANTI-SWEAT HEATER  
40W 33A @ 120 VAC  
0495007

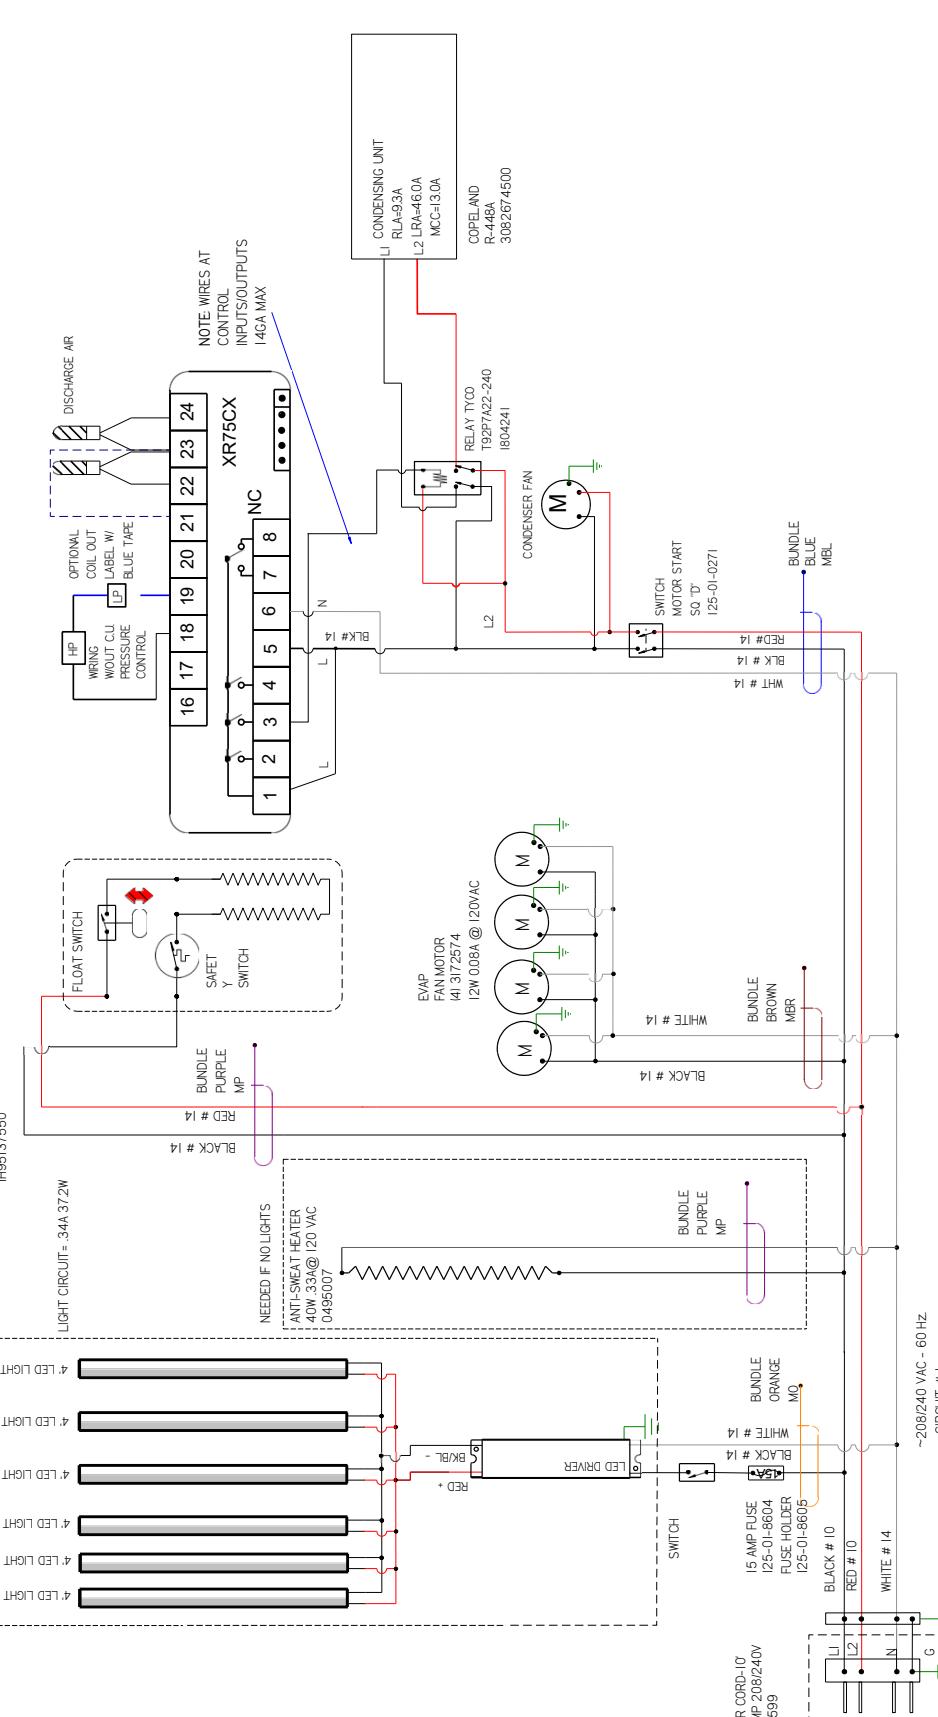

- NOTES:
1. PRINTED DOCUMENT REQUIRED SETTING: ALL COLORS BLACK & WHITE
  2. CASE & ANY REMOVABLE PANEL WITH ELECTRICAL PARTS MUST BE GROUNDED.
  3. WHEN PASSING WIRES THROUGH METAL HOLES A GROMMET MUST BE USED

FACTORY 14GA WIRE	
-FACTORY LOGA WIRE	-
-FIELD WIRE	-
---	---
DO NOT SCALE DRAWING	PIN
SHEET 1 OF 1	F

HUSSMANN  
DIAGRAM-Q3-SS-8-  
SWXR75 CTLR  
3156422

ONE-LO WIRE DIAGRAM SIZE C

## 11. User Information

### Stocking

Improper temperature and lighting will cause serious product loss. Discoloration, dehydration and spoilage can be controlled with proper use of the equipment and handling of product. Product temperature should always be maintained at a constant and proper temperature. This means that from the time the product is received, through storage, preparation and display, the temperature of the product must be controlled to maximize life of the product. Hussmann cases were not designed to "heat up" or "cool down" product - but rather to maintain an item's proper temperature for maximum shelf life. To achieve the protection required always:

1. Minimize processing time to avoid damaging temperature rise to the product. Product should be at proper temperature.
2. Keep the air in and around the case area free of foreign gasses and fumes or food will rapidly deteriorate.
3. Maintain the display merchandisers temperature controls as outlined in the refrigerator section of this manual.
4. Do not place any product into these refrigerators until all controls have been adjusted and they are operating at the proper temperature. Allow merchandiser to operate a minimum of one (1) hour before stocking with any product.
5. When stocking, never allow the product to extend beyond the recommended load limit. Air discharge and return air flow must be unobstructed at all times to provide proper refrigeration.
6. Avoid the use of supplemental food or spot lighting. Display light intensity has been designed for maximum visibility and product life at the factory. The use of higher output fluorescent lamps (H.O. and V.H.O.), will shorten the shelf life of the product.

### Case Cleaning

Long life and satisfactory performance of any equipment are dependent upon the care given to it. To insure long life, proper sanitation and minimum maintenance costs, the refrigerator should be thoroughly cleaned frequently. **SHUT OFF FAN DURING CLEANING PROCESS.** It can be unplugged within the case, or shut off entire case at the source. The interior bottom may be cleaned with any domestic soap or detergent based cleaners. Sanitizing solutions will not harm the interior bottom, however, these solutions should always be used according to the Hussmann's directions. It is essential to establish and regulate cleaning procedures. This will minimize bacteria causing discoloration which leads to degraded product appearance and significantly shortening product shelf life.

*Soap and hot water are not enough to kill this bacteria. A*

*sanitizing solution must be included with each cleaning process to eliminate this bacteria.*

1. Scrub thoroughly, cleaning all surfaces, with soap and hot water.
2. Rinse with hot water, but do not flood.
3. Apply the sanitizing solution according to Hussmann's directions.
4. Rinse thoroughly.
5. Dry completely before resuming operation.

### Cleaning Glass and Mirrors

Only use a soft cloth and mild glass cleaner for cleaning any glass or mirrored components. Be sure to rinse and/or dry completely.

**Never use hot water on cold glass surfaces! It may shatter and cause serious injury!** Allow glass surfaces to warm first.

### Non-Glare Glass

The high optical clarity of this glass is possible due to special coatings on the glass surface itself. To preserve this coating and the optical clarity, keep the glass clean.

Water is the only solution recommended for use in cleaning non-glare glass. The damage to the glass from improper, caustic solutions is irreparable.

In addition to cleaning the glass with the recommended product, there are precautions that should be taken when working and cleaning the inside of the case.

- When cleaning the inside of the cases, we recommend that the glass be fully opened and covered to prevent solutions from splashing onto the glass and ruining the coating on the inside.

### Plexiglass and Acrylic Care

Improper cleaning not only accelerates the cleaning cycle but also degrades the quality of this surface.

Normal daily buffing motions can generate static cling attracting dust to the surface. Incorrect cleaning agents or cleaning cloths can cause micro scratching of the surface, causing the plastic to haze over time.

### Cleaning

Hussmann recommends using a clean damp chamois, or a paper towel marked as "dust and abrasive free" with **210® Plastic Cleaner and Polish** available by calling Sumner Labs at **1-800-542-8656**. Hard, rough cloths or paper towels will scratch the acrylic and should not be used.

### Antistatic Coatings

The **210®** has proven to be very effective in not only cleaning and polishing the Plexiglass surface, but also providing antistatic and anti-fog capabilities. This product also seals pores and provides a protective coating.

## 12. Maintenance



Please read these instructions completely before beginning case installation



### DANGER BEFORE SERVICING

**Always Disconnect Electrical Power at the Main Disconnect when servicing or replacing any electrical component.**

This includes (but not limited to) Fans, Heaters, Thermostats, and Lights.

### Evaporator Fans

The evaporator fans are located at the center front of these merchandisers directly beneath the display pans. *Should fans or blades need servicing, always replace fan blades with the raised embossed side of the blade TOWARD THE MOTOR.*

### Copper Coils

The copper coils used in Hussmann merchandisers may be repaired in the field. Materials are available from local refrigeration wholesalers.

Hussmann recommends using #15 Sil-Fos for repairs.

### Tips and Troubleshooting

**Before calling for service, check the following:**

1. Check electrical power supply to the equipment for connection.
2. Check fixture loading. Overstocking case will affect its proper operation.
3. If frost is collecting on fixture and/or product, check that Humidity Control is working properly, and that no outside doors or windows are open - allowing moisture to enter store.

### CAUTION

#### CLEANING PRECAUTIONS

**When cleaning:**

- Do not use high pressure water hoses
- Do not introduce water faster than waste outlet can drain
- NEVER INTRODUCE WATER ON SELF CONTAINED UNIT WITH AN EVAPORATOR PAN
- NEVER USE A CLEANING OR SANITIZING SOLUTION THAT HAS AN OIL BASE (these will dissolve the butyl sealants) or an AMMONIA BASE (this will corrode the copper components of the case)
- TO PRESERVE THE ATTRACTIVE FINISH:
  - DO USE WATER AND A MILD DETERGENT FOR THE EXTERIOR ONLY
  - DO NOT USE A CHLORINATED CLEANER ON ANY SURFACE
  - DO NOT USE ABRASIVES OR STEEL WOOL SCOURING PADS (these will mar the finish)

### Glass Replacement and Adjustment Instructions

In order to replace or adjust the glass, the glass must be placed in the raised position. The underside of the clamp is exposed, revealing the tightening screws. By turning these screws counterclockwise 1/4 turn each, the glass will be loosened for either removal or adjustment.

**Note:** Do not overtighten the screws since damage may occur.

## Maintenance (Cont'd)

### **Stainless Steel Cleaning and Care**

There are three basic things, which can break down your stainless steel's passivity layer and allow corrosion.

#### **1. Mechanical Abrasion**

Mechanical Abrasion means those things that will scratch the steel's surface. Steel Pads, wire Brushes, and Scrapers are prime examples.

#### **2. Water**

Water comes out of our tap in varying degrees of hardness. Depending on what part of the country you live in, you may have hard or soft water. Hard water may leave spots. Also, when heated, hard water leaves deposits behind that if left to sit, will break down the passive layer and rust your stainless steel. Other deposits from food preparation and service must be properly removed.

#### **3. Chlorides**

Chlorides are found nearly everywhere. They are in water, food and table salt. One of the worst perpetrators of chlorides can come from household and industrial cleaners.

Don't Despair! Here are a few steps that can help prevent stainless steel rust.

#### **1. Use the Proper Tools**

When cleaning your stainless steel products, take care to use non-abrasive tools. Soft Clothes and plastic scouring pads will NOT harm the steel's passive layer. Stainless steel pads can also be used but the scrubbing motion must be in the same direction of the manufacturer's polishing marks.

#### **2. Clean With the Polish Lines**

Some stainless steels come with visible polishing lines or "grain". When visible lines are present, you should ALWAYS scrub in a motion that is parallel to them. When the grain cannot be seen, play it safe and use a soft cloth or plastic scouring pad.

#### **3. Use Alkaline, Alkaline Chlorinated or Non-chloride Containing Cleaners**

While many traditional cleaners are loaded with chlorides, the industry is providing an ever increasing choice of non-chloride cleaners. If you are not sure of your cleaner's chloride content contact your cleaner supplier. If they tell you that your present cleaner contains chlorides, ask for an alternative. Also, avoid cleaners containing quaternary salts as they also can attack stainless steel & cause pitting and rusting.

#### **4. Treat your Water**

Though this is not always practical, softening hard water can do much to reduce deposits. There are certain filters that can be installed to remove distasteful and corrosive elements. Salts in a properly maintained water softener are your friends.

If you are not sure of the proper water treatment, call a treatment specialist.

#### **5. Keep your Food Equipment Clean**

Use alkaline, alkaline chlorinated or non-chlorinated cleaners at recommended strength. Clean frequently to avoid build-up of hard, stubborn stains. If you boil water in your stainless steel equipment, remember the single most likely cause of damage is chlorides in the water. Heating cleaners that contain chlorides has a similar effect.

#### **6. RINSE, RINSE, RINSE**

If chlorinated cleaners are used you must rinse, rinse, rinse and wipe dry immediately. The sooner you wipe off standing water, especially when it contains cleaning agents, the better. After wiping the equipment down, allow it to air dry for the oxygen helps maintain the stainless steel's passivity film.

#### **7. Never Use Hydrochloric Acid (Muriatic Acid) on Stainless Steel**

#### **8. Regularly Restore/Passivate Stainless Steel**

## Maintenance (Cont'd)

### WARNING

ALWAYS DISCONNECT THE ELECTRICAL POWER AT THE MAIN DISCONNECT WHEN SERVICING OR REPLACING ANY ELECTRICAL COMPONENT OF THIS REFRIGERATOR. THIS INCLUDES, BUT IS NOT LIMITED TO SUCH ITEMS AS FANS AND THERMOSTATS.

### Fan Blade Replacement

The evaporator fan is located directly under the deck pan. Should the fan blade ever need servicing. ALWAYS REPLACE THE FAN BLADE WITH THE RAISED EMBOSSED SIDE OF THE BLADE INSTALLED TOWARD THE MOTOR.

### LED Driver Replacement

The power supply for the LED fixtures is located under the case in a dedicated electrical box.

#### For access to the driver:

- Remove Close-off panels ( See Close-off Removal for reference)
- Remove screws to grille to expose electrical conduit?
- Replace or service the ballast as required and replace the canopy in reverse order of removal.

## 13. Troubleshooting Guide

Problem	Possible Cause	Possible Solution
<b>Case temperature is too warm.</b>	Ambient conditions may be affecting the case operation.	Check case position in store. Is the case located near an open door, window, electric fan or air conditioning vent that may cause air currents? Case must be located minimum 15 Ft away from doors or windows. Cases are designed to operate at 55% Relative humidity and a temperature of 75°F.
	Discharge air temp is out of spec.	Check evaporator fan operation. Check electrical connections and input voltage. Fans are installed backwards. Check airflow direction. Fan blades are installed incorrectly. Make sure fan blades have correct pitch and are per specification. Check to see that fan plenum is installed correctly. It should not have any gaps. Check suction pressure and insure that it meets factory specifications.
	Case is in defrost.	Check defrost settings. See Technical Specifications section.
	Product load may be over its limits blocking airflow.	Redistribute product so it does not exceed load level. There is a sticker on the inside of the case indicating what the maximum load line is.
	Coil is freezing over.	Return air is blocked, make sure debris is not blocking the intake section. Coil close-offs are not installed. Inspect coil to make sure these parts are on the case.
	Condensing coil or evaporator coil is clogged or dirty.	Clean coil.
	The t-stat temp is set too low.	Check settings. See Technical Specifications section.
	Ambient conditions may be affecting the case operation.	Check case position in store. Is the case located near an open door, window, electric fan or air conditioning vent that may cause air currents? Case must be located minimum 15 Ft away from doors or windows. Cases are designed to operate at 55% Relative humidity and a temperature of 75°F.
<b>Condensation on glass.</b>	Ambient conditions may be affecting the case operation.	Check case position in store. Is the case located near an open door, window, electric fan or air conditioning vent that may cause air currents? Case must be located minimum 15 Ft away from doors or windows. Cases are designed to operate at 55% Relative humidity and a temperature of 75°F.
	Inadequate air circulation.	Check if air sweep fans are functioning, check electrical connections.
	There is not enough heat provided in the airflow.	Check if air sweep heater is functioning, check electrical connections.
	There are glass gaps on the side of the case.	See glass adjustment section.
	Glass is not completely shut.	Close glass correctly.

## Troubleshooting Guide

<b>Problem</b>	<b>Possible Cause</b>	<b>Possible Solution</b>
<b>Water has pooled under case.</b>	Case drain is clogged.	Clear drain.
	PVC drains under case may have a leak.	Repair as needed.
	Case tub has unsealed opening.	Seal as needed.
	If the case is in a line-up, case to case joint is missing or unsealed.	Install case to case joint and seal as needed.
	Evaporator pan is overflowing (if applicable).	Check electrical connection to evaporator pan. Check float assembly, it should move freely up and down the support stem. Clear any debris.
<b>Case is not draining properly.</b>	Case is not level.	Level the case.
	Drain screen is plugged.	Clean drain screen and remove any debris.
	Drain or P-trap is clogged.	Clear any debris.
<b>Frost or ice on evaporator coil.</b>	Evaporator fans are not functioning.	Check electrical connections.
	Defrost clock is not functioning.	Case should be serviced by a qualified service technician.
	Coil is freezing over.	Return air is blocked, make sure debris is not blocking the intake section.
		Coil close-offs are not installed. Inspect coil to make sure these parts are on the case.
<b>Large gap is visible on bottom of front glass or glass can't be opened because it is too low.</b>	Glass Height adjusters need to be adjusted.	See Glass Adjustment section.
<b>Large gaps are visible in between glass panels or glass rubs against end panel.</b>	Glass/glass clamp assembly needs to be adjusted.	See Glass Adjustment section.
<b>Front glass does not stay open and falls closed.</b>	Glass shock/piston may need to be replaced.	Case should be serviced by a qualified service technician.
<b>Lights do not come on.</b>	LED Driver/light socket wiring.	Check electrical connections. See Electrical Section and check wiring diagram.
	LED Driver needs to be replaced.	Case should be serviced by a qualified service technician. See Electrical Section.
	Lamp socket needs to be replaced.	Case should be serviced by a qualified service technician.
	Lamp needs to be replaced.	See Maintenance Section.
	Light Switch needs to be replaced.	Case should be serviced by a qualified service technician.


## 14. Appendices

### Appendix A. - Temperature Guidelines

The refrigerators should be operated according to the manufacturer's published engineering specifications for entering air temperatures for specific equipment applications. Table 1 shows the typical temperature of the air entering the food zone one hour before the start of defrost and one hour after defrost for various categories of refrigerators. Refer to Appendix C for Field Evaluation Guidelines.

**Table 1**

Type of Refrigerator	Typical Entering Air Temperature
I. OPEN DISPLAY	
A. Non frozen:	
1) Meat	28°F
2) Dairy/Deli	32°F
3) Produce	
a. Processed	36°F
b. Unprocessed	45°F
B. Frozen	0°F
C. Ice Cream	-5°F
II. CLOSED DISPLAY	
A. Non frozen:	
1) Meat	34°F
2) Dairy/Deli	34°F
3) Produce	
a. Processed	36°F
b. Unprocessed	45°F
B. Frozen	0°F
C. Ice Cream	-5°F

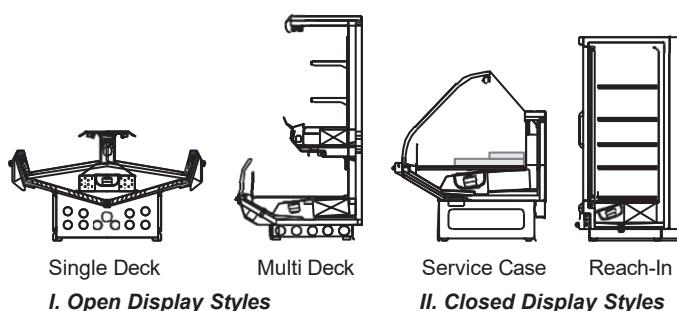

### Appendix B. - Application Recommendations

- Temperature performance is critical for controlling bacteria growth. Therefore, the following recommendations are included in the standard. They are based on confirmed field experience over many years.
- The installer is responsible for following the installation instructions and recommendations provided by Hussmann for the installation of each individual type refrigerator.
- Refrigeration piping should be sized according to

the equipment manufacturer's recommendations and installed in accordance with normal refrigeration practices. Refrigeration piping should be insulated according to Hussmann's recommendations.

- A clogged waste outlet blocks refrigeration. The installer is responsible for the proper installation of the system which dispenses condensate waste through an air gap into the building indirect waste system.
- The installer should perform a complete start-up evaluation prior to the loading of food into the refrigerator, which includes such items as:
  - Initial temperature performance, Coils should be properly fed with a refrigerant according to manufacturer's recommendations.
  - Observation of outside influences such as drafts, radiant heating from the ceiling and from lamps. Such influence should be properly corrected or compensated for.
  - At the same time, checks should be made of the store dry-bulb and wet-bulb temperatures to ascertain that they are within the limits prescribed by Hussmann.
  - Complete start-up procedures should include checking through a defrost to make certain of its adequate frequency and length without substantially exceeding the actual needs. This should include checking the electrical or refrigerant circuits to make sure that defrosts are correctly programmed for all the refrigerators connected to each refrigeration system.
  - Recording instruments should be used to check performance.

### Appendix C. - Field Recommendations

Recommendations for field evaluating the performance of retail food refrigerators and hot cases

- The most consistent indicator of display refrigerator performance is temperature of the air entering the product zone (see Appendix A). In practical use, the precise determination of return air temperature is extremely difficult. Readings of return air temperatures will be variable and results will be inconsistent. The product temperature alone is not an indicator of refrigerator performance.

## Appendices (Cont'd)

**NOTE:** Public Health will use the temperature of the product in determining if the refrigerator will be allowed to display potentially hazardous food. For the purpose of this evaluation, product temperature above the FDA Food Code 1993 temperature for potentially hazardous food will be the first indication that an evaluation should be performed. It is expected that all refrigerators will keep food at the FDA Food Code 1993 temperature for potentially hazardous food.

1. The following recommendations are made for the purpose of arriving at easily taken and understood data which, coupled with other observations, may be used to determine whether a display refrigerator is working as intended:
  - a) **INSTRUMENT** - A stainless steel stem-type thermometer is recommended and it should have a dial a minimum of 1 inch internal diameter. A test thermometer scaled only in Celsius or dually scaled in Celsius and Fahrenheit shall be accurate to 1°C (1.8°F). Temperature measuring devices that are scaled only in Fahrenheit shall be accurate to 2°F. The thermometer should be checked for proper calibration. (It should read 32°F when the stem is immersed in an ice water bath).
  - b) **LOCATION** - The probe or sensing element of the thermometer should be located in the airstream where the air first enters the display or storage area, and not more than 1 inch away from the surface and in the center of the discharge opening.
  - c) **READING** - It should first be determined that the refrigerator is refrigerating and has operated at least one hour since the end of the last defrost period. The thermometer reading should be made only after it has been allowed to stabilize, i.e., maintain a constant reading.
  - d) **OTHER OBSERVATIONS** - Other observations should be made which may indicate operating problems, such as unsatisfactory product, feel/appearance.
  - e) **CONCLUSIONS** - In the absence of any apparent undesirable conditions, the refrigerator should be judged to be operating properly. If it is determined that such condition is undesirable, i.e., the product is above proper temperature, checks should be made for the following:
    1. Has the refrigerator been loaded with warm product?
    2. Is the product loaded beyond the "Safe Load Line" markers?
    3. Are the return air ducts blocked?

4. Are the entering air ducts blocked?
5. Is a dumped display causing turbulent air flow and mixing with room air?
6. Are spotlights or other high intensity lighting directed onto the product?
7. Are there unusual draft conditions (from heating/air-conditioning ducts, open doors, etc.)?
8. Is there exposure to direct sunlight?
9. Are display signs blocking or diverting airflow?
10. Are the coils of the refrigerator iced up?
11. Is the store ambient over 75°F, 55% RH as set forth in ASHRAE Standard 72 and ASHRAE Standard 117?
12. Are the shelf positions, number, and size other than recommended by Hussmann?
13. Is there an improper application or control system?
14. Is the evaporator fan motor/blade inoperative?
15. Is the defrost time excessive?
16. Is the defrost termination, thermostat (if used) set too high?
17. Are the refrigerant controls incorrectly adjusted?
18. Is the air entering the condenser above design conditions? Are the condenser fins clear of dirt, dust, etc.?
19. Is there a shortage of refrigerant?
20. Has the equipment been modified to use replacements for CFC-12, CFC-502 or other refrigerant? If so, have the modifications been made in accordance with the recommendations of the equipment manufacturer? Is the refrigerator charged with the proper refrigerant and lubricant? Does the system use the recommended compressor?

## Appendix D. - Recommendations to User

- 1.0 Hussmann Corporation provides instructions and recommendations for proper periodic cleaning. The user will be responsible for such cleaning, including the cleaning of low temperature equipment within the compartment and the cooling coil area(s). Cleaning practices, particularly with respect to proper refrigerator unloading and warm-up, must be in accordance with applicable recommendations.

## Appendices (Cont'd)

- 1.1 Cleaning of non frozen food equipment should include a weekly cleaning of the food compartment as a minimum to prevent bacteria growth from accumulating. Actual use and products may dictate more frequent cleaning. Circumstances of use and equipment design must also dictate the frequency of cleaning the display areas. Weekly washing down of the storage compartment is also recommended, especially for equipment subject to drippage of milk or other liquids, or the collection of vegetable, meat, crumbs, etc. or other debris or litter. Daily cleaning of the external areas surrounding the storage or display compartments with detergent and water will keep the equipment presentable and prevent grime buildup.
- 2. Load levels as defined by the manufacturer must be observed.
- 3. The best preservation is achieved by following these rules:
  - a) Buy quality products.
  - b) Receive perishables from transit equipment at the ideal temperature for the particular product.
  - c) Expedite perishables to the store's storage equipment to avoid unnecessary warm-up and prolonged temperature recovery. Food store refrigerators are not food chillers nor can they reclaim quality lost through previous mishandling.
  - d) Care must be taken when cross merchandising products to ensure that potentially hazardous vegetable products are not placed in non refrigerated areas.
  - e) Display and storage equipment doors should be kept closed during periods of inactivity.
  - f) Minimize the transfer time of perishables from storage to display.
  - g) Keep meat under refrigeration in meat cutting and processing area except for the few moments it is being handled in processing. When a cut or tray of meat is not to be worked on immediately, the procedure should call for returning it to refrigeration.
  - h) Keep tools clean and sanitized. Since mechanical equipment is used for fresh meat processing, all such equipment should be cleaned at least daily and each time a different kind of meat product comes in contact with the tool or equipment.
  - i) Make sure that all refrigeration equipment is installed and adjusted in strict accordance with the manufacturer's recommendations.
  - j) See that all storage and refrigeration equipment is kept in proper working order by routine maintenance.

## 15. Controller Parameters

<b>Q2-SS</b>					<b>PGM0006A01</b>	
<b>Parameter</b>	<b>Code</b>	<b>Min</b>	<b>Max</b>	<b>Default</b>	<b>STANDARD CASE REV F 06/4/18</b>	
					<b>Actual (°C)</b>	<b>Actual (°F)</b>
<b>Temperature (set point)</b>						
Deli (Type I)	---	-50.0°C	50.0°C	2.0°C	-4.4	24
Meat (Type I)	---	-50.0°C	50.0°C	2.0°C	-6.7	20
<b>Thermostat</b>						
Differential	r01	0.1 K	20.0K	2.0 K	4.4	8
Max. limitation of setpoint setting	r02	-49.0°C	50°C	50.0°C	-1.1	30
Min. limitation of setpoint setting	r03	-50.0°C	49.0°C	-50.0°C	-6.7	20
Adjustment of temperature indication	r04	-20.0 K	20.0 K	0.0 K		
Temperature unit (°C=0/°F=1)	r05	0	1	0	1	
Correction of the signal from S4	r09	-10.0 K	+10.0 K	0.0 K		
Correction of the signal from S3	r10	-10.0 K	+10.0 K	0.0 K		
Manual service, stop regulation, start regulation (-1, 0, 1)	r12	-1	1	0	1	
Displacement of reference during night operation	r13	-10.0 K	10.0 K	0.0 K		
Definition and weighting, if applicable, of thermostat sensors - S4% (100%-S4, 0%-S3)	r15	0%	100%	100%		
The heating function is started a number of degrees below the thermostats cutout temperature	r36	-15.0 K	-3.0 K	-15.0 K		
Activation of reference displacement r40	r39	OFF	ON	OFF		
Value of reference displacement (activate via r39 or DI)	r40	-50.0 K	50.0 K	0.0 K		
<b>Alarm</b>						
Delay for temperature alarm	A03	0 min	240 min	30 min		
Delay for door alarm	A04	0 min	240 min	60 min		
Delay for temperature alarm after defrost	A12	0 min	240 min	90 min	30	
High alarm limit	A13	-50.0°C	50.0°C	8.0°C	5.0	41
Low alarm limit	A14	-50.0°C	50.0°C	-30.0°C	-9.4	15
Alarm delay DI1	A27	0 min	240 min	30 min		
Alarm delay DI2	A28	0 min	240 min	30 min		
Signal for alarm thermostat. S4% (100%-S4, 0%-S3)	A36	0%	100%	100%		
<b>Compressor</b>						
Min. ON-time	c01	0 min	30 min	0 min	1	
Min. OFF-time	c02	0 min	30 min	0 min	2	
Time delay for cutin of comp.2	c05	0 sec	999 sec	0 sec		
Compressor relay 1 must cutin and out inversely (NC-function)	c30	0 OFF	1 ON	0 OFF		
<b>Defrost</b>						
Defrost method (none/EL/GAS/BRINE)	d01	no	bri	EL		
Defrost stop temperature	d02	0.0°C	25.0°C	6.0°C	89	48
Interval between defrost starts	d03	0 hours	240 hours	8 hours	6	
Max. defrost duration	d04	0 min	180 min	45 min	50	
Displacement of time on cutin of defrost at start-up	d05	0 min	240 min	0 min		
Drip off time	d06	0 min	60 min	0 min		
Delay for fan start after defrost	d07	0 min	60 min	0 min		
Fan start temperature	d08	-15.0°C	0.0°C	-5.0°C		
Fan cutin during defrost	d09	0	2	1		
0: Stopped 1: Running 2: Running during pump down and defrost						
Defrost Sensor (0=time, 1=S5, 2=S4)	d10	0	2	0	0	
Pump down delay	d16	0 min	60 min	0 min		
Drain delay	d17	0 min	60 min	0 min		
Max. aggregate refrigeration time between two defrosts	d18	0 hours	48 hours	0 hours		
Defrost on demand - S5 temperature's permitted variation during frost build-up. On central plant choose 20 K (=off)	d19	0.0 K	20.0 k	20.0 K		
Delay of hot gas defrost	d23	0 min	60 min	0 min		
<b>Fan</b>						
Fan stop at cutout compressor	F01	no	yes	no		
Delay of fan stop	F02	0 min	30 min	0 min		
Fan stop temperature (S5)	F04	-50.0°C	50.0°C	50.0°C		

## Controller Parameters (Cont'd)

<b>HACCP</b>				
Actual temperature measurement for the HACCP	h01			
Last registered peak temperature	h10			
Selection of function and sensor for the HACCP	h11	0	2	0
HACCP function. 1 = S4 used (maybe also S3). 2 = S5				
Alarm limit for the HACCP function	h12	-50.0°C	50.0°C	8.0°C
Time delay for the HACCP alarm	h13	0 min.	240 min.	30 min.
Select signal for the HACCP function. S4% (100% = S4,	h14	0%	100%	100%
<b>Real time clock</b>				
Six start times for defrost. Setting of hours. 0=OFF	t01-t06	0 hours	23 hours	0 hours
Six start times for defrost. Setting of minutes. 0=OFF	t11-t16	0 min	59 min	0 min
Clock - Setting of hours	t07	0 hours	23 hours	0 hours
Clock - Setting of minute	t08	0 min	59 min	0 min
Clock - Setting of date	t45	1	31	1
Clock - Setting of month	t46	1	12	1
Clock - Setting of year	t47	0	99	0
<b>Miscellaneous</b>				
Delay of output signals after start-up	o01	0 s	600 s	5 s
Input signal on DI1. Function:	o02	1	11	0
Network address	o03	0	240	0
On/Off switch (Service Pin message)	o04	OFF	ON	OFF
Access code 1 (all settings)	o05	0	100	0
Used sensor type (Pt /PTC/NTC)	o06	Pt	ntc	Pt
Display step = 0.5 (normal 0.1 at Pt sensor)	o15	no	yes	no
Max hold time after coordinated defrost	o16	0 min	60 min	20
Select signal for display view. S4% (100%=\$4, 0%=\$3)	o17	0%	100%	100%
Input signal on DI2. Function:	o37	0	12	0
Configuration of light function (relay 4)	o38	1	3	1
Activation of light relay (only if o38=2)	o39	OFF	ON	OFF
Rail heat On time during day operations	o41	0%	100%	100
Rail heat On time during night operations	o42	0%	100%	100
Rail heat period time (On time + Off time)	o43	6 min	60 min	10 min
Case cleaning. 0=no case cleaning. 1=Fans only. 2>All	o46	0	2	0
Selection of EL diagram. See overview page 6	o61	1	10	1
Download a set of predetermined settings. See	o62	0	6	0
Access code 2 (partly access)	o64	0	100	0
Save the controllers present settings to the	o65	0	25	0
Load a set of settings from the programming key	o66	0	25	0
Replace the controllers factory settings with the	o67	OFF	On	OFF
<b>Service</b>				
Status codes are shown on page 17	S0-S33			
Temperature measured with S5 sensor	u09			
Status on DI1 input. on/1=closed	u10			
Temperature measured with S3 sensor	u12			
Status on night operation (on or off ) 1=closed	u13			
Temperature measured with S4 sensor	u16			
Thermostat temperature	u17			
Read the present regulation reference	u28			
Status on DI2 output. on/1=closed	u37			
Temperature shown on display	u56			
Measured temperature for alarm thermostat	u57			
Status on relay for cooling	u58			
Status on relay for fan	u59			
Status on relay for defrost	u60			
Status on relay for railheat	u61			
Status on relay for alarm	u62			
Status on relay for light	u63			
Status on relay for valve in suction line	u64			
Status on relay for compressor 2	u67			


## Controller Parameters (Cont'd)

Q-SS-2 (Q1, Q2, Q3)					PGM0011A01	
Parameter	Code	Min	Max	Default	STANDARD CASE REV C 6/5/18	
					Actual (°C)	Actual (°F)
<b>Temperature (set point)</b>						
Produce (Type I)	---	-50.0°C	50.0°C	2.0°C	-7.8	18
<b>Thermostat</b>						
Differential	r01	0.1 K	20.0K	2.0 K	4.4	8
Max. limitation of setpoint setting	r02	-49.0°C	50°C	50.0°C	2.2	36
Min. limitation of setpoint setting	r03	-50.0°C	49.0°C	-50.0°C	-7.8	18
Adjustment of temperature indication	r04	-20.0 K	20.0 K	0.0 K	0.0 K	
Temperature unit (°C=0/°F=1)	r05	0	1	0	1	
Correction of the signal from S4	r09	-10.0 K	+10.0 K	0.0 K	0.0 K	
Correction of the signal from S3	r10	-10.0 K	+10.0 K	0.0 K	0.0 K	
Manual service, stop regulation, start regulation (-1, 0, 1)	r12	-1	1	0	1	
Displacement of reference during night operation	r13	-10.0 K	10.0 K	0.0 K	0.0 K	
Definition and weighting, if applicable, of thermostat sensors - S4% (100%-S4, 0%-S3)	r15	0%	100%	100%	100%	
The heating function is started a number of degrees below the thermostats cutout temperature	r36	-15.0 K	-3.0 K	-15.0 K	-15.0 K	
Activation of reference displacement r40	r39	OFF	ON	OFF	OFF	
Value of reference displacement (activate via r39 or DI)	r40	-50.0 K	50.0 K	0.0 K	0.0 K	
<b>Alarm</b>						
Delay for temperature alarm	A03	0 min	240 min	30 min	30 min	
Delay for door alarm	A04	0 min	240 min	60 min	60 min	
Delay for temperature alarm after defrost	A12	0 min	240 min	90 min	60	
High alarm limit	A13	-50.0°C	50.0°C	8.0°C	5.0	41
Low alarm limit	A14	-50.0°C	50.0°C	-30.0°C	-9.4	15
Alarm delay DI1	A27	0 min	240 min	30 min	30 min	
Alarm delay DI2	A28	0 min	240 min	30 min	30 min	
Signal for alarm thermostat. S4% (100%-S4, 0%-S3)	A36	0%	100%	100%	100%	
<b>Compressor</b>						
Min. ON-time	c01	0 min	30 min	0 min	1	
Min. OFF-time	c02	0 min	30 min	0 min	2	
Time delay for cutin of comp.2	c05	0 sec	999 sec	0 sec	0 sec	
Compressor relay 1 must cutin and out inversely (NC-function)	c30	0	1	0	0	
OFF					OFF	
<b>Defrost</b>						
Defrost method (none/EL/GAS/BRINE)	d01	no	bri	EL	EL	
Defrost stop temperature	d02	0.0°C	25.0°C	6.0°C	8.9	48
Interval between defrost starts	d03	0 hours	240 hours	8 hours	6	
Max. defrost duration	d04	0 min	180 min	45 min	50	
Displacement of time on cutin of defrost at start-up	d05	0 min	240 min	0 min	0 min	
Drip off time	d06	0 min	60 min	0 min	0 min	
Delay for fan start after defrost	d07	0 min	60 min	0 min	0 min	
Fan start temperature	d08	-15.0°C	0.0°C	-5.0°C	-5.0°C	
Fan cutin during defrost 0: Stopped 1: Running 2: Running during pump down and defrost	d09	0	2	1	1	
Defrost Sensor (0=time, 1=S5, 2=S4)	d10	0	2	0	0	
Pump down delay	d16	0 min	60 min	0 min	0 min	
Drain delay	d17	0 min	60 min	0 min	0 min	
Max. aggregate refrigeration time between two defrosts	d18	0 hours	48 hours	0 hours		
Defrost on demand - S5 temperature's permitted variation during frost build-up. On central plant choose 20 K (=off )	d19	0.0 K	20.0 k	20.0 K		
Delay of hot gas defrost	d23	0 min	60 min	0 min	0 min	
<b>Fan</b>						
Fan stop at cutout compressor	F01	no	yes	no	no	
Delay of fan stop	F02	0 min	30 min	0 min	0 min	
Fan stop temperature (S5)	F04	-50.0°C	50.0°C	50.0°C	50.0°C	
<b>HACCP</b>						
Actual temperature measurement for the HACCP	h01					
Last registered peak temperature	h10					
Selection of function and sensor for the HACCP HACCP function. 1 = S4 used (maybe also S3). 2 = S5	h11	0	2	0	0	

## Controller Parameters (Cont'd)

Alarm limit for the HACCP function	h12	-50.0°C	50.0°C	8.0°C	8.0°C	
Time delay for the HACCP alarm	h13	0 min.	240 min.	30 min.	30 min.	
Select signal for the HACCP function. S4% (100% = S4,	h14	0%	100%	100%	100%	
<b>Real time clock</b>						
Six start times for defrost. Setting of hours. 0=OFF	t01-t06	0 hours	23 hours	0 hours	0 hours	
Six start times for defrost. Setting of minutes. 0=OFF	t11-t16	0 min	59 min	0 min	0 min	
Clock - Setting of hours	t07	0 hours	23 hours	0 hours	0 hours	
Clock - Setting of minute	t08	0 min	59 min	0 min	0 min	
Clock - Setting of date	t45	1	31	1	1	
Clock - Setting of month	t46	1	12	1	1	
Clock - Setting of year	t47	0	99	0	0	
<b>Miscellaneous</b>						
Delay of output signals after start-up	o01	0 s	600 s	5 s	5 s	
Input signal on DI1. Function:	o02	1	11	0	0	
Network address	o03	0	240	0	0	
On/Off switch (Service Pin message)	o04	OFF	ON	OFF	OFF	
Access code 1 (all settings)	o05	0	100	0	0	
Used sensor type (Pt /PTC/NTC)	o06	Pt	ntc	Pt	Pt	
Display step = 0.5 (normal 0.1 at Pt sensor)	o15	no	yes	no	no	
Max hold time after coordinated defrost	o16	0 min	60 min	20	20	
Select signal for display view. S4% (100% = S4, 0% = S3)	o17	0%	100%	100%	100%	
Input signal on DI2. Function:	o37	0	12	0	0	
Configuration of light function (relay 4)	o38	1	3	1	1	
Activation of light relay (only if o38=2)	o39	OFF	ON	OFF	OFF	
Rail heat On time during day operations	o41	0%	100%	100	100	
Rail heat On time during night operations	o42	0%	100%	100	100	
Rail heat period time (On time + Off time)	o43	6 min	60 min	10 min	10 min	
Case cleaning 0=no case cleaning 1=Fans only. 2>All	o46	0	2	0	0	
Selection of EL diagram. See overview page 6	o61	1	10	1	1	
Download a set of predetermined settings. See	o62	0	6	0	0	
Access code 2 (partly access)	o64	0	100	0	0	
Save the controllers present settings to the	o65	0	25	0	0	
Load a set of settings from the programming key	o66	0	25	0	0	
Replace the controllers factory settings with the	o67	OFF	On	OFF	OFF	
<b>Service</b>						
Status codes are shown on page 17	S0-S33					
Temperature measured with S5 sensor	u09					
Status on DI1 input. on/1=closed	u10					
Temperature measured with S3 sensor	u12					
Status on night operation (on or off ) 1=closed	u13					
Temperature measured with S4 sensor	u16					
Thermostat temperature	u17					
Read the present regulation reference	u28					
Status on DI2 output. on/1=closed	u37					
Temperature shown on display	u56					
Measured temperature for alarm thermostat	u57					
Status on relay for cooling	u58					
Status on relay for fan	u59					
Status on relay for defrost	u60					
Status on relay for railheat	u61					
Status on relay for alarm	u62					
Status on relay for light	u63					
Status on relay for valve in suction line	u64					
Status on relay for compressor 2	u67					

## 16. Danfoss Controller Operations

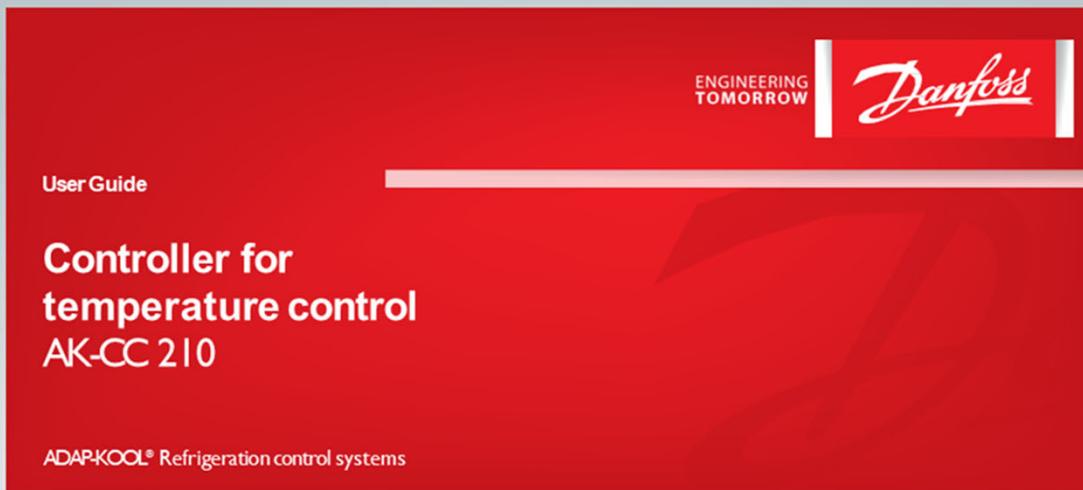

- ① Open Camera
- ② iPhone User  
Hold the camera up to the QR code
- ③ Android User  
Open QR Code Reader app if necessary.  
Hold the camera up to the QR code
- ④ Tap the notification to be taken to the destination of the QR code

## 17. Dixell Controller Operations

026-1210 Rev 3 03-FEB-2015

# XR75CX Digital Controller for Medium-Low Temperature Refrigeration Applications Installation and Operation Manual



- ① Open Camera
- ② iPhone User  
Hold the camera up to the QR code
- ③ Android User  
Open QR Code Reader app if necessary.  
Hold the camera up to the QR code
- ④ Tap the notification to be taken to the destination of the QR code



---

This warning does not mean that Hussmann products will cause cancer or reproductive harm, or is in violation of any product-safety standards or requirements. As clarified by the California State government, Proposition 65 can be considered more of a 'right to know' law than a pure product safety law. When used as designed, Hussmann believes that our products are not harmful. We provide the Proposition 65 warning to stay in compliance with California State law. It is your responsibility to provide accurate Proposition 65 warning labels to your customers when necessary. For more information on Proposition 65, please visit the California State government website.

---

## Service Record

Last service date: By:

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

## HUSSMANN®/Chino

Additional copies of this publication may be obtained by contacting:

Hussmann® Chino  
13770 Ramona Avenue • Chino, California 91710  
(909) 628-8942 FAX  
(909) 590-4910  
(800) 395-9229

The **MODEL NAME** and **SERIAL NUMBER** is required in order to provide you with the correct parts and information for your particular unit.

They can be found on a small metal plate on the unit.  
Please note them below for future reference.

**MODEL:**

**SERIAL NUMBER:**