

HUSSMANN[®]/CHINO

SCSS / SCSS-SL

SERVICE BAKERY

Installation
& Operation
Manual

REV. 0909

HUSSMANN[®]

SCSS / SCSS-SL
SERVICE BAKERY



P/N IGSSB-SCSS / SCSS-SL-0909

INSTALLATION & OPERATION GUIDE

General Instructions

Table of Contents

General Instructions	2
Cut and Plan Views	3
Installation	4
Location	4
Uncrating the Stand.....	4
Exterior Loading	4
Setting and Joining.....	4
Leveling.....	4
Corner Wedges	5
Joint Trim.....	5
Bumper Installation Instructions	5
Plumbing	8
Waste Outlet and P-TRAP.....	8
Installing Condensate Drain	8
Refrigeration	8
Refrigerant Type.....	8
Refrigeration Lines	8
Control Settings.....	8
Access to TX Valves and Drain Lines.....	8
Electronic Expansion Valve (Optional)	9
Thermostatic Expansion Valve Location.....	9
Expansion Valve Adjustment.....	9
Measuring the Operating Superheat	9
T-STAT Location	9
Piping.....	9
Refrigeration Data	10
Defrost Data-Low.....	10
Defrost Data-Medium	10
Physical Data.....	10
Glycol Requirements	10
Electrical	11
Wiring Color Code	11
Electrical Circuit Identification.....	11
Electrical Service Receptacles (When Applicable).....	11
Ballast Location	11
Field Wiring and Serial Plate Amperage.....	11
ASHRAE Color Code	11
Rear Close-off Panel.....	11
EKC 201 Controllers.....	12
Controller Application Setting Parameters.....	13
User Information	14
Stocking.....	14
Important Steps	14
Case Cleaning	14
Stainless Steel Cleaning and Care.....	15
Cleaning Mirrors	16
Cleaning Glass and Mirrors.....	16
Non-Glare Glass.....	16
Plexiglass and Acrylic Care	16
Cleaning	16
Antistatic Coatings.....	16
Maintenance	17
Replacing Fluorescent Lamps	17
T-5 Bulbs	17
Evaporator Fans.....	17
Copper Coils.....	17
Tips and Troubleshooting	17
Electrical Wiring Diagrams	18
Wiring Diagrams	19
Appendices	44
Appendix A. - Temperature Guidelines - Refrigerated	44
Appendix B. - Application Recommendations - Refrigerated.....	44
Appendix C. - Field Recommendations - Refrigerated	44
Appendix D. - Recommendations to User - Refrigerated	45

This Booklet Contains Information on:

Model Descriptions

All models are available in either 48", 60" lengths.

SCSSSL- Non-refrigerated Summit Cake Self-Service Bakery Case with 1 or 2 tier merchandising, and rear signage.

SCSSSL- Refrigerated Summit Cake Self-Service Bakery Case with 1 or 2 tier merchandising, and rear signage. Remote unit requires separate condenser unit connection. Low Temperature Model (SCSSSL-RLL).

SCSSSL- Self-contained refrigerated Summit Cake Self-Service Bakery Case with 1 or 2 tier merchandising, and rear signage. Low Temperature Model (SCSSSL-S/CHL).

Application

These service-type merchandisers have been specifically designed for bakery departments. The front glass provides complete product visibility.

The **SCSSSL-** non-refrigerated model, is designed to display fresh bakery products that have fast turnover and require no refrigeration. The **SCSSSL-** remote and **SCSSSL-** self-contained, refrigerated bakery merchandisers are designed for use only in air conditioned stores where temperature and humidity are maintained at or below 75°F dry bulb temperature and 55% relative humidity.

Shipping Damage

All equipment should be thoroughly examined for shipping damage before and during unloading.

This equipment has been carefully inspected at our factory and the carrier has assumed responsibility for safe arrival. If damaged, either apparent or concealed, claim must be made to the carrier.

Apparent Loss or Damage

If there is an *obvious loss or damage*, it must be noted on the freight bill or express receipt and signed by the carrier's agent; otherwise, carrier may refuse claim. The carrier will supply necessary claim forms.


Concealed Loss or Damage

When loss or damage *is not apparent until after equipment is uncrated*, a claim for concealed damage is made. Make request in writing to carrier for inspection within 15 days, and retain all packaging. The carrier will supply inspection report and required claim forms.

Keep this booklet with the case at all times for future reference.

HUSSMANN®/CHINO

A publication of HUSSMANN® Chino
13770 Ramona Avenue • Chino, California 91710
(909) 628-8942 FAX
(909) 590-4910
(800) 395-9229

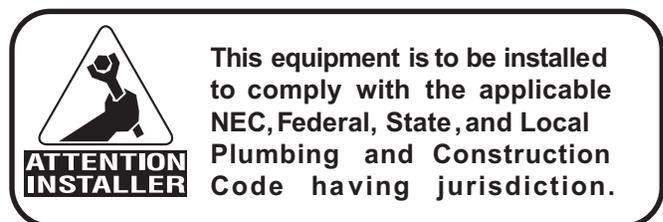

General Instructions (Cont'd)


Shortages

Check your shipment for any possible shortages of material. If a shortage should exist and is found to be the responsibility of Hussmann Chino, *notify Hussmann Chino*. If such a shortage involves the carrier, *notify the carrier immediately*, and request an inspection. Hussmann Chino will acknowledge shortages within ten days from receipt of equipment.


Hussmann Chino Product Control

The serial number and shipping date of all equipment has been recorded in Hussmann's files for warranty and replacement part purposes. All correspondence pertaining to warranty or parts ordering must include the serial number of each piece of equipment involved, in order to provide the customer with the correct parts.


Cut and Plan Views

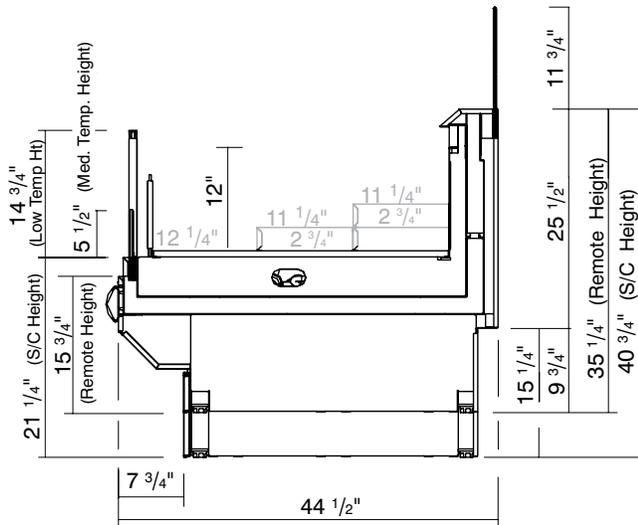


SCSS
Summit Cake Service Bakery Case
(Remote & Self Contained)
Scale = 1/2"

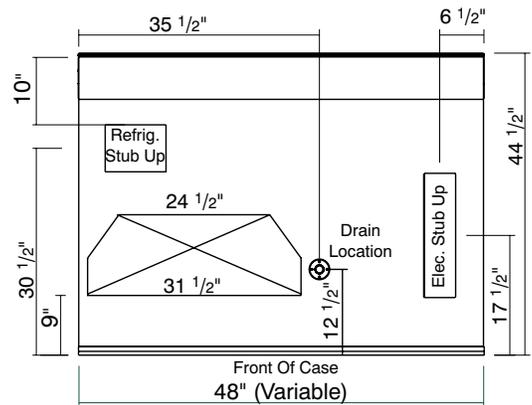

SCSS
Plan view
Scale = 1/2"

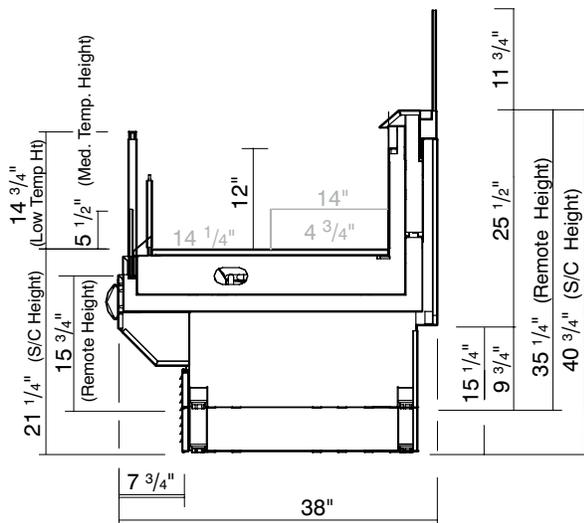

SCSS-SL
Summit Cake Self-Service Bakery Case - Slim Line
(Remote & Self Contained)
Scale = 1/2"

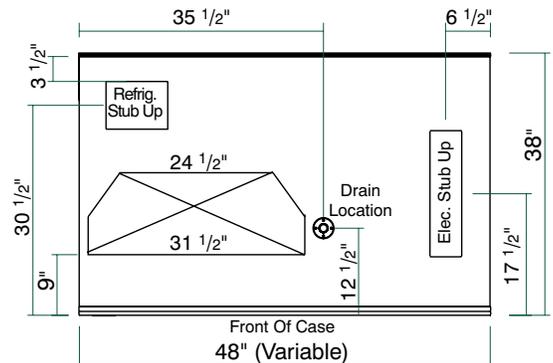

SCSS-SL
Plan view
Scale = 1/2"

Installation

Location

The refrigerated merchandisers have been designed for use only in air conditioned stores where temperature and humidity are maintained at or below 75°F and 55% relative humidity. DO NOT allow air conditioning, electric fans, ovens, open doors or windows (etc.) to create air currents around the merchandiser, as this will impair its correct operation.

Product temperature should always be maintained at a constant and proper temperature. This means that from the time the product is received, through storage, preparation and display, the temperature of the product must be controlled to maximize life of the product.

Uncrating the Stand

Place the fixture as close to its permanent position as possible. Remove the top of the crate. Detach the walls from each other and remove from the skid. Unbolt the case from the skid. The fixture can now be lifted off the crate skid. **Lift only at base of stand!**

Exterior Loading

These models have **not** been structurally designed to support excessive external loading. **Do not walk on their tops;** This could cause serious personal injury and damage to the fixture.

Setting and Joining

The sectional construction of these models enable them to be joined in line to give the effect of one continuous display. A joint trim kit is supplied with each joint.

Leveling

IMPORTANT! IT IS IMPERATIVE THAT CASES BE LEVELED FROM FRONT TO BACK AND SIDE TO SIDE PRIOR TO JOINING. A LEVEL CASE IS NECESSARY TO INSURE PROPER OPERATION, WATER DRAINAGE, GLASS ALIGNMENT AND OPERATION OF THE HINGES SUPPORTING THE GLASS. LEVELING THE CASE CORRECTLY WILL SOLVE MOST HINGE OPERATION PROBLEMS.

NOTE: A. To avoid removing concrete flooring when installing long lineups, begin lineup leveling from the highest point of the store floor.

B. When wedges are involved in a lineup, set them first.

All cases were leveled and joined prior to shipment to insure the closest possible fit when cases are joined in the field. When joining, use a carpenters level and shim legs accordingly. Case must be raised correctly, under legs where support is best, to prevent damage to case.

1. Check floor where cases are to be set to determine the highest point of the floor; cases will be set off this point.

2. Set first case, and adjust legs over the highest part of the floor so that case is level. Prevent damage - case must be raised under leg or by use of 2x6 or 2x4 leg brace. Remove side and back leg braces after case is set.
3. Set second case as close as possible to the first case, and level case to the first using the instructions in step one.
4. Apply masking tape 1/8" in from end of case on inside and outside rear mullion on both cases to be joined.
5. Apply liberal bead of case joint sealant (butyl) to (dotted area shown in figure) first case. Apply heavy amount to cover entire shaded area.

DO NOT USE PERMAGUM!



**ATTENTION
INSTALLER**

It is the contractor's responsibility to install case(s) according to local construction and health codes.

6. Slide second case up to first case snugly. Then level second case to the first case so glass front, bumper and top are flush.
7. To compress butyl at joint, use two Jurgenson wood clamps. Make sure case is level from front to back and side to side on inside bulkheads at joint.
8. Attach sections together via a 2 bolts located in the base of the case. Secure the overhead structure by bolting the bracket, located inside behind lights.



CAUTION

Do not use cam locks to pull cases together.

9. Apply bead of butyl to top of bulkheads and slip on stainless steel bulkhead cap. Also apply butyl to seam between overhead light tubes.
10. **VERY IMPORTANT!** Apply liberal amounts of black butyl to area under interior lower legs and fill all voids down to bulkhead.
11. Use finger to smooth butyl as thin as possible at masking tape on inside and outside of rear mullion (apply additional butyl if necessary). Remove tape applied on line #3.

Installation (Cont'd)

Corner Wedges

Corner wedges are attached via front and rear camlocks. Use a 7mm Allen wrench to turn the locks. Do not over-tighten! Join the top by using a joint bracket (included in joint kit) with 3/8" bolts.

Joint Trim

After cases have been leveled and joined and refrigeration, electrical, and wasted piping work completed, install the splashguards. Fasten along the top edge or center, with #10 X 3/3" sheet metal screws.

DO NOT SEAL JOINT TRIM TO FLOOR!

Bumper Installation Instructions



Step 1: Make sure the aluminum channel and end caps are installed.



Step 2: Use silicone lubricant to help the bumper slide into the channel.



Step 3: Starting on one end: while inserting the bumper, push it up against the end cap to prevent the bumper from shrinking after installation (when it gets cold).



Step 4: As you insert the bumper into the channel with one hand, pull the bumper toward you with the other to open the inside lips. Slowly apply pressure by rolling the bumper into the track.

Installation (Cont'd)

Boston Series 2000

NOTE: Flexible top: Over cut vinyl 1/8" for every 4' section for the flexible top to ensure a proper fit.

NOTE: Rigid Top: Do not over cut.



1. Attach the base and end/corner cap to the desired surface by inserting #8 pan head screws through the pre-slotted holes in both the end cap and the base. Insert screws through the two holes of end cap and tighten.



- 2a. **Flexible Top:** Butt end of the vinyl top against end/corner cap. While applying pressure, bend back vinyl top so that vinyl legs are positioned within the base grooves. Roll vinyl top over full length of base, then tap with rubber mallet to ensure vinyl is securely locked into the base.

- 2b. **Rigid Top:** Snap the Rigid Top over the Rigid Base.



3. If necessary wipe clean with any household cleaning product.

Helpful Hints:

- For best results, before cutting, install a scrap piece of base into vinyl top to achieve a clean cut.
- Set the uncoiled flexible vinyl at room temperature 24 hours prior to installation.
- Lubricate the inside of the vinyl with soapy water or silicone before installing.
- Over cut the flexible vinyl and compression fit. Adding the additional materials will compensate for stretching which occurs during installation.

Boston 2000 Eco Series



1. Attach the base and end/corner cap to the desired surface by inserting #8 pan head screws through the pre-slotted holes in both the end cap and the base. Insert screws through the two holes of end cap and tighten.



- 2a. **Flexible Top:** Butt end of the vinyl top against end/corner cap. While applying pressure, bend back vinyl top so that vinyl legs are positioned within the base grooves. Roll vinyl top over full length of base, then tap with rubber mallet to ensure vinyl is securely locked into the base.

- 2b. **Rigid Top:** Snap the Rigid Top over the Rigid Base.



3. If necessary wipe clean with any household cleaning product.

Helpful Hints:

- For best results, before cutting, install a scrap piece of base into vinyl top to achieve a clean cut.
- Set the uncoiled flexible vinyl at room temperature 24 hours prior to installation.
- Lubricate the inside of the vinyl with soapy water or silicone before installing.
- Over cut the flexible vinyl and compression fit. Adding the additional materials will compensate for stretching which occurs during installation.

Installation (Cont'd)

Boston 1000 Series

NOTE: Flexible top: Over cut vinyl 1/8" for every 4' section for the flexible top to ensure a proper fit.

NOTE: Rigid Top: Do not over cut.

Installation



1. Attach the base and end/corner cap to the desired surface by inserting #8 pan head screws through the pre-slotted holes in both the end cap and the base. Insert screws through the two holes of end cap and tighten.



- 2a. **Flexible Top:** Butt end of the vinyl top against end/corner cap. While applying pressure, bend back vinyl top so that vinyl legs are positioned within the base grooves. Roll vinyl top over full length of base, then tap with rubber mallet to ensure vinyl is securely locked into the base.

- 2b. **Rigid Top:** Snap the Rigid Top over the Rigid Base.



3. If necessary wipe clean with any household cleaning product.

Helpful Hints:

- For best results, before cutting, install a scrap piece of base into vinyl top to achieve a clean cut.
- Set the uncoiled flexible vinyl at room temperature 24 hours prior to installation.
- Lubricate the inside of the vinyl with soapy water or silicone before installing.
- Over cut the flexible vinyl and compression fit. Adding the additional materials will compensate for stretching which occurs during installation.

Plumbing

Waste Outlet and P-TRAP

The waste outlet is located off the center of the case, on one side allowing drip piping to be run lengthwise under the fixture.

A 3/4" P-TRAP and threaded adapter are supplied with each fixture. The P-TRAP must be installed to prevent air leakage and insect entrance into the fixture.


NOTE: PVC-DWV solvent cement is recommended. Follow the Hussmann's instructions.

Installing Condensate Drain

Poorly or improperly installed condensate drains can seriously interfere with the operation of this refrigerator and result in costly maintenance and product losses. Please follow the recommendations listed below when installing condensate drains to insure a proper installation:

1. Never use pipe for condensate drains smaller than the nominal diameter of the pipe or P-TRAP supplied with the case.
2. When connecting condensate drains, the P-TRAP must be used as part of the condensate drain to prevent air leakage or insect entrance. Store plumbing system floor drains should be at least 14" off the center of the case to allow use of the P-TRAP pipe section. Never use two water seals in series in any one line. Double P-TRAPS in series will cause a lock and prevent draining.
3. Always provide as much down hill slope ("fall") as possible; 1/8" per foot is the preferred minimum. PVC pipe, when used, must be supported to maintain the 1/8" pitch and to prevent warping.

4. Avoid long runs of condensate drains. Long runs make it impossible to provide the "fall" necessary for good drainage.
5. Provide a suitable air break between the flood rim of the floor drain and outlet of condensate drain. 1" is ideal.
6. Prevent condensate drains from freezing:
 - a. Do not install condensate drains in contact with non-insulated suction lines. Suction lines should be insulated with a nonabsorbent insulation material such as Armstrong's Armaflex.
 - b. Where condensate drains are located in dead air spaces (between refrigerators or between a refrigerator and a wall), provide means to prevent freezing. The water seal should be insulated to prevent condensation.

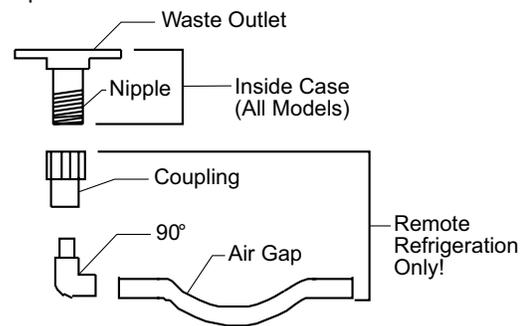

Refrigeration

Refrigerant Type

The standard refrigerant will be R-22 unless otherwise specified on the customer order. Check the serial plate on the case for information.

Refrigeration Lines

Liquid	Suction
3/8" O.D.	5/8" O.D.

NOTE: The standard coil is piped at 5/8" (suction); however, the store tie-in may vary depending on the number of coils and the draw the case has. Depending on the case setup, the connecting point in the store may be 5/8", 7/8", or 1 1/8". Refer to the particular case you are hooking up.

Refrigerant lines should be sized as shown on the refrigeration legend furnished by the store.

Install P-TRAPS (oil traps) at the base of all suction line vertical risers.

Pressure drop can rob the system of capacity. To keep the pressure drop to a minimum, keep refrigerant line run as short as possible, using the minimum number of elbows. Where elbows are required, use long radius elbows only.

Control Settings

See SCSS / SCSS-SL technical data sheet for the appropriate settings for your merchandiser. Maintain these parameters to achieve near constant product temperatures. For all multiplexing, defrost should be time terminated. Defrost times should be as seen in SCSS / SCSS-SL technical data sheet. The number of defrosts per day should never change. The duration of the defrost cycle may be adjusted to meet conditions present at your location.

0°F / - 18°C or less air temperature. Adequate performance is assured by the desired condition of the product in case.

Access to TX Valves and Drain Lines

MECHANICAL - Remove product from end of case. Remove product racks. Remove refrigeration and drain access panels (labeled). TX valve (mechanical only) and drain are located under each access panel at end of the case.

ELECTRONIC - The Electronic Expansion valve master and slave cylinder(s) are located within the electrical access panel(s).

Refrigeration (Cont'd)

Electronic Expansion Valve (Optional)

A wide variety of electronic expansion valves and case controllers can be utilized. Please refer to EEV and controller Hussmann's information sheet. Sensors for electronic expansion valves will be installed on the coil inlet, coil outlet and in the discharge air. (Some supermarkets require a 4th sensor in the return air). Case controllers will be located in the electrical raceway or under the case.

Thermostatic Expansion Valve Location

This device is located on the same side as the refrigeration stub. An Sporlan balanced port expansion valve model is furnished as standard equipment, unless otherwise specified by customer.

Expansion Valve Adjustment

Expansion valves must be adjusted to fully feed the evaporator. Before attempting any adjustments, make sure the evaporator is either clear or very lightly covered with frost, and that the fixture is within 10°F of its expected operating temperature.

Measuring the Operating Superheat

1. Determine the suction pressure with an accurate pressure gauge at the evaporator outlet.
2. From a refrigerant pressure temperature chart, determine the saturation temperature at the observed suction pressure.
3. Measure the temperature of the suction gas at the thermostatic remote bulb location.
4. Subtract the saturation temperature obtained in step No. 2 from the temperature measured in step No. 3.
5. The difference is superheat.
6. Set the superheat for 5°F - 7°F.

Multiplexing - Piping of merchandisers operating on the same refrigeration system may be run from merchandiser to merchandiser through the end frame saddles provided for this purpose. **DO NOT RUN REFRIGERANT LINES THROUGH MERCHANDISERS THAT ARE NOT THE SAME REFRIGERATION SYSTEM** as this may result in poor refrigeration control and compressor failure.

Line Sizing - Refrigerant lines should be sized as shown on the refrigeration legend that is furnished for the store (not furnished by Hussmann). If a legend has not been furnished, refer to the Hussmann Application Engineering Manual for guidance.

Oil Traps - P-TRAPS (oil traps) must be installed at the base of all suction line vertical risers.

Pressure Drop - Pressure drop can rob the system of capacity. To keep the pressure drop to a minimum, keep the refrigerant line run as short as possible using a minimum number of elbows. Where elbows are required, use long radius elbows only.

Insulation - The suction and liquid lines should be clamped or taped together and insulated for a minimum of 30' from the merchandiser. Additional insulation is recommended wherever condensation drippage is objectionable.

T-STAT Location

T-STATS are located within the electrical raceway.

Condensing Unit Installation Requirements

For proper operation of the Condensing Unit provide an opening with adequate exhaust and intake as follows:

Up to 1 1/2 hp: minimum of 2 vents totalling 150 sq. in.
Over 1/2 hp: minimum of 2 vents totalling 150 sq. in.

Self-Contained Model Installation - Low temperature merchandisers need to be connected to both a 120V / 60 Hz and 230V / 60 Hz electrical supply.

Piping

For merchandisers with "electric" defrost, the suction and liquid lines should be clamped or taped together and insulated for a minimum of 30 feet. For models with "KOOLGAS®" defrost, suction, and liquid lines should not contact each other, and should be insulated separately for a minimum of 30 feet. With either type defrost, additional insulation for the balance of the liquid and suction lines is required wherever condensation and drippage would be objectionable.

The refrigerant line outlets are located under the fixture at the left end when viewed from the back. Insulate suction lines to prevent condensation dripping on the floor.

Refrigeration (Cont'd)

Refrigeration Data

Note: This data is based on store temperature and humidity that does not exceed 75F and 55% R.H.

	Low	Medium
Discharge Air (F)	-20	30
Evaporator (F)	-25	20

Note: Not recommended to control temp by regulating coil temp allow T-STAT to cycle and control temp.

	Low	Medium
<i>Btu/hr/ft*</i>		
Parallel	800	650
Conventional	920	748

*For all refrigeration equipment other than Hussmann, use conventional Btu values.

Defrost Data-Low

Frequency Hrs	12
OFFTIME	
Temp Term °F	54
Failsafe Minutes	30

Defrost Data-Medium

Frequency Hrs	12
OFFTIME	
Temp Term °F	54
Failsafe Minutes	30

ELECTRIC or GAS Not Recommended

Physical Data

Merchandiser Drip Pipe (in.)	1½
Merchandiser Liquid Line (in.)	3/8*
Merchandiser Suction Line (in.)	5/8*
Estimated Charge (lb)***	
4ft	1.2
5ft	1.5
6ft	1.8

*Dependent on case length and refrigerant type.

*** This is an average for all refrigerants types. Actual refrigerant charge may vary by approximately half a pound.

Glycol Requirements

GPM	PSI
N/A	N/A
N/A	N/A
N/A	N/A

Electrical

Wiring Color Code

STANDARD CASE WIRE COLOR CODE CODIGO DE COLORES DE LOS ALAMBRES PARA LAS VITRINAS ESTANDAR CODE COULER POUR FILS DE BOITIER NORMALISE		
COLOR DESCRIPTION	DESCRIPCION	DESCRIPTION
■ GROUND	TIERRA MASA	MASSE
■ ANTI-SWEAT	ANTICONDENSACION	ANTI-SUINTEMENT
■ LIGHTS	LUCES	ECLAIRAGE
■ RECEPTACLES	ENCHUFES	PRISE DE COURANT
■ T-STAT/SOLENOID 230VAC	TERMOSTATO/SOLENOIDE (230VAC)	SOUPAPE A SOLENOID (230 VAC)
■ T-STAT/SOLENOID 115VAC	TERMOSTATO/SOLENOIDE (115VAC)	SOUPAPE A SOLENOID (115 VAC)
■ T-STAT/SOLENOID 24VAC	TERMOSTATO/SOLENOIDE (24VAC)	SOUPAPE A SOLENOID (24 VAC)
■ FAN MOTORS	VENTILADORES	VENTILATEUR
BLUE CONDENSING UNIT	UNIDAD DE CONDENSACION	UNITE DE CONDENSATION

USE COPPER CONDUCTORS ONLY
UTILISEZ LES CONDUCTEURS DE CUIVRE SEULEMENT
UTILICE LOS CONDUCTORES DE COBRE SOLAMENTE
 430-01-0338 R101003

CASE MUST BE GROUNDED

NOTE: Refer to label affixed to case to determine the actual configuration as checked in the “TYPE INSTALLED” boxes.

Electrical Circuit Identification

Standard lighting for all models will be full length fluorescent lamps located within the case at the top.

The switch controlling the lights, the plug provided for digital scale, and the thermometer are located at the rear of the case mullion.

Electrical Service Receptacles (When Applicable)

The receptacle that is provided on the exterior back of these models is intended for computerized scales with a fifteen amp maximum load, not for large motors or other high wattage appliances. It should be wired to a dedicated circuit.



DANGER

BEFORE SERVICING
 ALWAYS DISCONNECT ELECTRICAL
 POWER AT THE MAIN DISCONNECT
 WHEN SERVICING OR REPLACING ANY
 ELECTRICAL COMPONENT.

This includes (but not limited to) Fans, Heaters
 Thermostats, and Lights.

Ballast Location

Ballasts are located within the access panel that runs the length of the rear of the case.

Field Wiring and Serial Plate Amperage

Field Wiring must be sized for component amperes printed on the serial plate. Actual ampere draw may be less than specified. Field wiring from the refrigeration control panel to the merchandisers is required for refrigeration thermostats. Case amperes are listed on the wiring diagram, but always check the serial plate.

Ashrae Color Code

NOTE: All other manufacturers have no standard sensor codes.

Case Control Systems SENSOR COLOR			
Manufacturer ® >	EIL	CPC	
Location			
Coil Inlet	Color	Blue	Blue
	Part#	225-01-1755	225-01-3255
Coil Outlet	Color	Red	Red
	Part#	225-01-1757	225-01-3123
Discharge Air	Color	Green	Green
	Part#	225-01-1756	225-01-3260
Return Air	Color	Purple	Green
	Part#	225-01-1758	225-01-3260
Defrost Term.	Color	White	Orange
	Part#	225-01-0650	225-01-3254
Liquid Line	Color	White	Blue
	Part#	225-01-0650	225-01-3255

Rear Close-off Panel

To perform electrical and refrigeration work, remove the rear closure panel by loosening the sheet metal screws. Replace when work is complete.

Electrical Connections - All wiring must be in compliance with NEC and local codes. All electrical connections for the non refrigerated model are to be made in the electrical panel. Electrical connections for refrigerated models are made in the electrical box on the back of the case behind the rear close-off panel.


Field Wiring - Field wiring must be sized for components amperes stamped on the serial plate. Actual ampere draw may be less than specified. Always check the serial plate.

Post Construction Clean-up - After the first two weeks of a major store remodel or new store operation, the grill should be removed and the condensing unit and condenser face cleaned due to the accumulated dirt and debris generated during construction.

Electrical (Cont'd)

EKC 201 Controllers

EKC 201



$t_{room} = 0 \rightarrow +55^{\circ}C$
 $t_{system} = -60 \rightarrow +50^{\circ}C$
 12 V a.c./230 V a.c.
 2.5 VA
 IP 54

Fig. 1

Identification

(See figs 1 and 2).

1. Light emitting diode

= refrigeration

= defrost

= fan running

2. Minus sign

3. Display

(Flashes when setting value for room temp. is displayed).

4. Keys for programming and setting (see programming instructions).

Programming and setting

see programming instructions, parameter code, and settings.

Press upper key for 2 s.

Press lower key for 2 s.

Press both keys at the same time.

Quick guide

What to do	Initial controller	Operating the two pushbuttons	Resulting controller
Read or change room temp.	Normal operation Room		Normal operation Room
Read or change parameter codes and	Normal operation (or alarm) Unknown codes		Normal operation (or alarm) Known codes
Re-establish all factory	Unknown settings		All parameter settings = factory
Read defrost sensor	Normal operation or alarm		Normal operation
Manually start of a defrost	Normal operation		Normal operation
Manually stop of a defrost	Defrost operation		Normal operation
Reset alarm relay	Alarm relay		Alarm relay not
Read codes cause of alarm mode	Alarm relay not activated		Alarm

Electrical (Cont'd)

Controller Application Setting Parameters

Setting and read-off parameters	Parameter codes	Controller application no.				Min. value	Max. value	Factory setting	Actual setting
		1	2	3	4				
Temperature controller, Temperature						-60°C	50°C	3°C	
Thermostat									
Differential ¹⁾	r01					0.1 K	20 K	2 K	
Max. limitation of set temperature	r02					-59°C	50°C	50°C	
Min. limitation of set temperature	r03					-60°C	49°C	-60°C	
Adjustment of temperature indication	r04					-20 K	20 K	0.0 K	
Temperature unit (°C/°F)	r05							°C	
Alarm									
Upper deviation (above temp. setting + differential ²⁾)	A01					0 K	50 K	5 K	
Lower deviation (below temp. setting ²⁾)	A02					0 K	50 K	5 K	
Temperature alarm delay	A03					0 min	90 min	30 min	
Door alarm delay	A04					0 min	60 min	30 min	
Compressor									
Min. ON-time	c01					0 min	15 min	0 min	
Min. OFF-time	c02					0 min	15 min	0 min	
Cut-in frequency on sensor fault ³⁾	c03					0 %	100 %	0 %	
Defrost									
Defrost method (EL/GAS)	d01							EL	
Defrost stop temperature	d02					0°C	25°C	6°C	
Interval between defrost starts	d03					OFF	48 hour	8 hour	
Max. defrost duration	d04					0 min	180 min	45 min	
Time staggering on defrost cut-ins at start-up	d05					0 min	60 min	0 min	
Drip-off time	d06					0 min	20 min	0 min	
Fan start delay after defrost	d07					0 min	20 min	0 min	
Fan start temperature	d08					-15°C	0°C	-5°C	
Fan cut-in during defrost (yes/no)	d09							yes	
Defrost sensor (yes/no)	d10							yes	
Temperature alarm delay after defrost	d11					0 min	199 min	90 min	
Fan									
Fan stop on compressor cut-out (yes/no)	F01							no	
Fan stop delay	F02					0 min	15 min	0 min	
Miscellaneous									
Delay of output signal cancellation after start-up	o01					2 s	120 s	2 s	
Digital input signals ⁴⁾ (0 = not used, 1 = door alarm, 2 = defrost, 3 = bus)	o02							0	
Real time clock (if fitted)									
Six start times for defrost All can be cut out by setting on OFF	t01→t06					0	23	OFF	
Hour setting	t07					0 hour	23 hour	0 hour	
Minute setting	t08					0 min	59 min	0 min	

Fault code display		Alarm code display	
Fault in controller	E 1	High temperature alarm	A 1
Disconnected room sensor	E 2	Low temperature alarm	A 2
Short-circuited room sensor	E 3	Door alarm	A 4
Disconnected defrost sensor	E 4	Status code display	
Short-circuited defrost sensor	E 5	ON-time	S 2
		OFF-time	S 3
		Drip-off time	S 4

1) The compressor relay closes when the room temperature exceeds the setting value and differential.
 2) Alarm is released and sensor failure is indicated, if the room temperature reaches 5°C or more outside the setting range -60° to +50°C.
 3) The frequency is measured after approx. three days and nights operation after start of the plant (72 cyclings) otherwise:
 ON-time = c03 × 20: 100 minutes
 OFF-time interval 20 minus ON-time per minute

4) Function possibilities with SPDT contact, connected to the terminals 3 and 4 are the following:
Door alarm: If SPST is cut out, alarm signalling starts and the fan is stopped, cf. A04 or F02.
Defrost: If SPST is cut in, defrost starts. (However, if d03 is not OFF, defrost will during contact break down start with the programmed time intervals).
Bus: With installed communication card, the position of the SPST contacts will be registered in the BUS system.

User Information

Stocking

In order to maximize product life, maintain a constant and proper product temperature from the time the product is received through storage, preparation and display.

Products should not be placed in merchandisers until all refrigeration controls have been adjusted and merchandisers are at proper operating temperature. Care should be taken to place the bakery trays all the way to the front of the shelf. This avoids blocking the rear refrigerated air discharge. The load limit decals are affixed to the interior of the merchandiser. Again, **air discharge and return air flow must be unobstructed at all times to provide proper refrigeration.**

There is also a row of vents located at the base of the front glass, just above the front rub rail. These vents allow a gentle air flow across the front glass from the ambient fans that prevents any condensation on the glass. **Do Not place any signs or other restrictive objects on the front of the merchandiser that will block these vents.**

Improper temperature and lighting will cause serious product loss. Discoloration, dehydration and spoilage can be controlled with proper use of the equipment and handling of product. Product temperature should always be maintained at a constant and proper temperature. This means that from the time the product is received, through storage, preparation and display, the temperature of the product must be controlled to maximize life of the product. Hussmann cases were not designed to "heat up" or "cool down" product - but rather to maintain an item's proper temperature for maximum shelf life. To achieve the protection required always:

1. Minimize processing time to avoid damaging temperature rise to the product. Product should be at proper temperature.
2. Keep the air in and around the case area free of foreign gasses and fumes or food will rapidly deteriorate.
3. Maintain the display merchandisers temperature controls as outlined in the refrigerator section of this manual.
4. Do not place any product into these refrigerators until all controls have been adjusted and they are operating at the proper temperature. Allow merchandiser to operate a minimum of 6 hours before stocking with any product.
5. When stocking, never allow the product to extend beyond the recommended load limit. **Air discharge and return air flow must be unobstructed at all times to provide proper refrigeration.**
6. There are vents located at the base of the front of the glass, just above the front rail. These vents supply a continuous, gentle flow of air across the front glass which inhibits condensation. Do not place any signs or other restrictive objects on the front of the refrigerator that will block these vents.

7. Avoid the use of supplemental flood or spot lighting. Display light intensity has been designed for maximum visibility and product life at the factory. The use of higher output fluorescent lamps (H.O. and V.H.O.), will shorten the shelf life of the product.

Important Steps

1. Do not set temperature too cold, as this causes product dehydration. See SCSS / SCSS-SL technical data sheet for proper settings.
2. Temperature control should be by means of a T-STAT and Suction Stop Solenoid at each case. Do not use EPR valves, Liquid Line Solenoids or electronic control devices of any kind, as these allow temperature swings causing dehydration and excessive energy consumption.
3. Product should be worked and rotated on a regular basis, not to exceed a 4-hour period.

Case Cleaning

Long life and satisfactory performance of any equipment are dependent upon the care given to it. To insure long life, proper sanitation and minimum maintenance costs, the refrigerator should be thoroughly cleaned frequently. It is essential to establish and regulate cleaning procedures. This will minimize bacteria causing discoloration which leads to degraded product appearance and significantly shortening product shelf life.

SHUT OFF FAN DURING CLEANING PROCESS. It can be unplugged within the case, or shut off case at the source. The interior bottom may be cleaned with any domestic soap or detergent based cleaners.

The use of hoses and sage machines to clean the inside of the cases is recommended and is an excellent way to clean the coil fins and hard to reach corners of the interior of the cases. Be sure to observe the warnings below when cleaning the case.

Sanitizing solutions will not harm the interior bottom, however, these solutions should always be used according to Hussmann's directions and should not contain Ammonia.

Soap and hot water are not enough to kill this bacteria. A sanitizing solution must be included with each cleaning process to eliminate this bacteria.

1. Allow cases to come to room temperature.
2. Scrub thoroughly, cleaning all surfaces, with soap and hot water.
3. Rinse with hot water, but do not flood.
4. Apply the sanitizing solution according to Hussmann's directions.
5. Rinse thoroughly.
6. Dry completely before resuming operation.

User Information (Cont'd)

Stainless Steel Cleaning and Care

There are three basic things, which can break down your stainless steel's passivity layer and allow corrosion.

1. Mechanical Abrasion

Mechanical Abrasion means those things that will scratch the steel's surface. Steel Pads, wire Brushes, and Scrapers are prime examples.

2. Water

Water comes out of our tap in varying degrees of hardness. Depending on what part of the country you live in, you may have hard or soft water. Hard water may leave spots. Also, when heated, hard water leaves deposits behind that if left to sit, will break down the passive layer and rust your stainless steel. Other deposits from food preparation and service must be properly removed.

3. Chlorides

Chlorides are found nearly everywhere. They are in water, food and table salt. One of the worst perpetrators of chlorides can come from household and industrial cleaners.

Don't Despair! Here are a few steps that can help prevent stainless steel rust.

1. Use the Proper Tools

When cleaning your stainless steel products, take care to use non-abrasive tools. Soft Clothes and plastic scouring pads will NOT harm the steel's passive layer. Stainless steel pads can also be used but the scrubbing motion must be in the same direction of the manufacturer's polishing marks.

2. Clean With the Polish Lines

Some stainless steels come with visible polishing lines or "grain". When visible lines are present, you should ALWAYS scrub in a motion that is parallel to them. When the grain cannot be seen, play it safe and use a soft cloth or plastic scouring pad.

3. Use Alkaline, Alkaline Chlorinated or Non-chloride Containing Cleaners

While many traditional cleaners are loaded with chlorides, the industry is providing an ever increasing choice of non-chloride cleaners. If you are not sure of your cleaner's chloride content contact your cleaner supplier. If they tell you that your present cleaner contains chlorides, ask for an alternative. Also, avoid cleaners containing quaternary salts as they also can attack stainless steel & cause pitting and rusting.

4. Treat your Water

Though this is not always practical, softening hard water can do much to reduce deposits. There are certain filters that can be installed to remove distasteful and corrosive elements. Salts in a properly maintained water softener are your friends. If you are not sure of the proper water treatment, call a treatment specialist.

5. Keep your Food Equipment Clean

Use alkaline, alkaline chlorinated or non-chlorinated cleaners at recommended strength. Clean frequently to avoid build-up of hard, stubborn stains. If you boil water in your stainless steel equipment, remember the single most likely cause of damage is chlorides in the water. Heating cleaners that contain chlorides has a similar effect.

6. RINSE, RINSE, RINSE

If chlorinated cleaners are used you must rinse, rinse, rinse and wipe dry immediately. The sooner you wipe off standing water, especially when it contains cleaning agents, the better. After wiping the equipment down, allow it to air dry for the oxygen helps maintain the stainless steel's passivity film.

7. Never Use Hydrochloric Acid (Muriatic Acid) on Stainless Steel

8. Regularly Restore/Passivate Stainless Steel

User Information (Cont'd)

Cleaning Mirrors

Only use a soft cloth and mild glass cleaner for cleaning any glass or mirrored components. Be sure to rinse and/or dry completely.

CAUTION

CLEANING PRECAUTIONS

When cleaning:

- Do not use high pressure water hoses
- Do not introduce water faster than waste outlet can drain
- NEVER INTRODUCE WATER ON SELF CONTAINED UNIT WITH AN EVAPORATOR PAN
- NEVER USE A CLEANING OR SANITIZING SOLUTION THAT HAS AN OIL BASE (these will dissolve the butyl sealants) or an AMMONIA BASE (this will corrode the copper components of the case)
- TO PRESERVE THE ATTRACTIVE FINISH:
- DO USE WATER AND A MILD DETERGENT FOR THE EXTERIOR ONLY
- DO NOT USE A CHLORANITED CLEANER ON ANY SURFACE
- DO NOT USE ABRASIVES OR STEEL WOOL SCOURING PADS (these will mar the finish)

NOTE: SELF-CONTAINED MODELS

The evaporator pan must be monitored for overflow conditions. Provide drainage if necessary. After cleaning and rinsing, purge the pan of any standing water.

- Care should be taken to minimize direct contact between fan motors and cleaning or rinse water.
- Allow the merchandisers to dry before resuming operation.
- When cleaning lighted shelves, wipe down with a damp sponge or cloth so that water does not enter the light channel. **Do NOT use a hose or submerge shelves in water.**

Cleaning Glass and Mirrors

Only use a soft cloth and mild glass cleaner for cleaning any glass or mirrored components. Be sure to rinse and/or dry completely.

Never use hot water on cold glass surfaces! It may shatter and cause serious injury! Allow glass surfaces to warm first.

Non-Glare Glass

The high optical clarity of this glass is possible due to special coatings on the glass surface itself. To preserve this coating and the optical clarity, keep the glass clean.

Windex® or Glass Plus® are the only solutions recommended to be used to clean the non-glare glass. The damage to the glass from improper, caustic solutions is irreparable.

In addition to cleaning the glass with the recommended product, there are precautions that should be taken when working and cleaning the inside of the case.

- When cleaning the inside of the cases, we recommend that the glass be fully opened and covered to prevent solutions from splashing onto the glass and ruining the coating on the inside.

Plexiglass and Acrylic Care

Improper cleaning not only accelerates the cleaning cycle but also degrades the quality of this surface. Normal daily buffing motions can generate static cling attracting dust to the surface. Incorrect cleaning agents or cleaning cloths can cause micro scratching of the surface, causing the plastic to haze over time.

Cleaning

Hussmann recommends using a clean damp chamois, or a paper towel marked as dust and abrasive free with **210® Plastic Cleaner and Polish** available by calling Sumner Labs at **1-800-542-8656**. Hard, rough cloths or paper towels will scratch the acrylic and should not be used.

Antistatic Coatings

The **210®** has proven to be very effective in not only cleaning and polishing the Plexiglass surface, but also providing anti-static and anti-fog capabilities. This product also seals pores and provides a protective coating.

Maintenance



BEFORE SERVICING
ALWAYS DISCONNECT ELECTRICAL
POWER AT THE MAIN DISCONNECT
WHEN SERVICING OR REPLACING ANY
ELECTRICAL COMPONENT.
This includes (but not limited to) Fans, Heaters
Thermostats, and Lights.

Replacing Fluorescent Lamps

Fluorescent lamps are furnished with a shatterproof protective coating. The same type of lamp with protective coating must be used if replaced.

This lamp has been treated to resist breakage and must be replaced with a similarly treated lamp in order to maintain compliance with NSF Standards. NSF CODE 4.28.1
 Contact HUSSMANN Chino for replacement
 1-800-395-9229 x 2131

T-5 Bulbs

Please note: T-5 lights must be turned off and on after bulb replacement.

Evaporator Fans

The evaporator fans are located in front of the CAD, directly beneath the display pans. *Should fans or blades need servicing, always replace fan blades with the raised embossed side of the blade TOWARD THE MOTOR.*

Copper Coils

The copper coils used in Hussmann merchandisers may be repaired in the field. Materials are available from local refrigeration wholesalers.

Hussmann recommends using #15 Sil-Fos for repairs.

Tips and Troubleshooting

Before calling for service, check the following:

1. Check electrical power supply to the equipment for connection.
2. Check fixture loading. Overstocking case will affect its proper operation.
3. If frost is collecting on fixture and/or product, check that Humidity Control is working properly, and that no outside doors or windows are open - allowing moisture to enter store.




IMPORTANT
INFORMATION

FOR PROMPT SERVICE
When contacting the factory,
be sure to have the Case Model and Serial
Number handy. This information is on a plate
located on the case itself.

Electrical Wiring Diagrams


SCSS-M SCSS-SLM Medium Temp.	Off-Time Defrost Self Contained	4'	W8000006
		5'	W8000007
		6'	W8000008
		8'	W8000009
		10'	W8000010
		12'	W8000011
SCSS-L SCSS-SLL Frozen Food	Electric Defrost	4'	W8100000
		5'	W8100001
		6'	W8100002
		8'	W8100003
		10'	W8100004
		12'	W8100005
	Electric Defrost Self Contained	4'	W8100006
		5'	W8100007
		6'	W8100008
	W/O Evap Pan W/O Evap Pan and with CPC control	8'	1H15781
		8'	1H23783
	Kool-Gas™ Defrost	4'	W8100012
		5'	W8100013
		6'	W8100014
		8'	W8100015
		10'	W8100016
		12'	W8100017

Wiring Diagrams

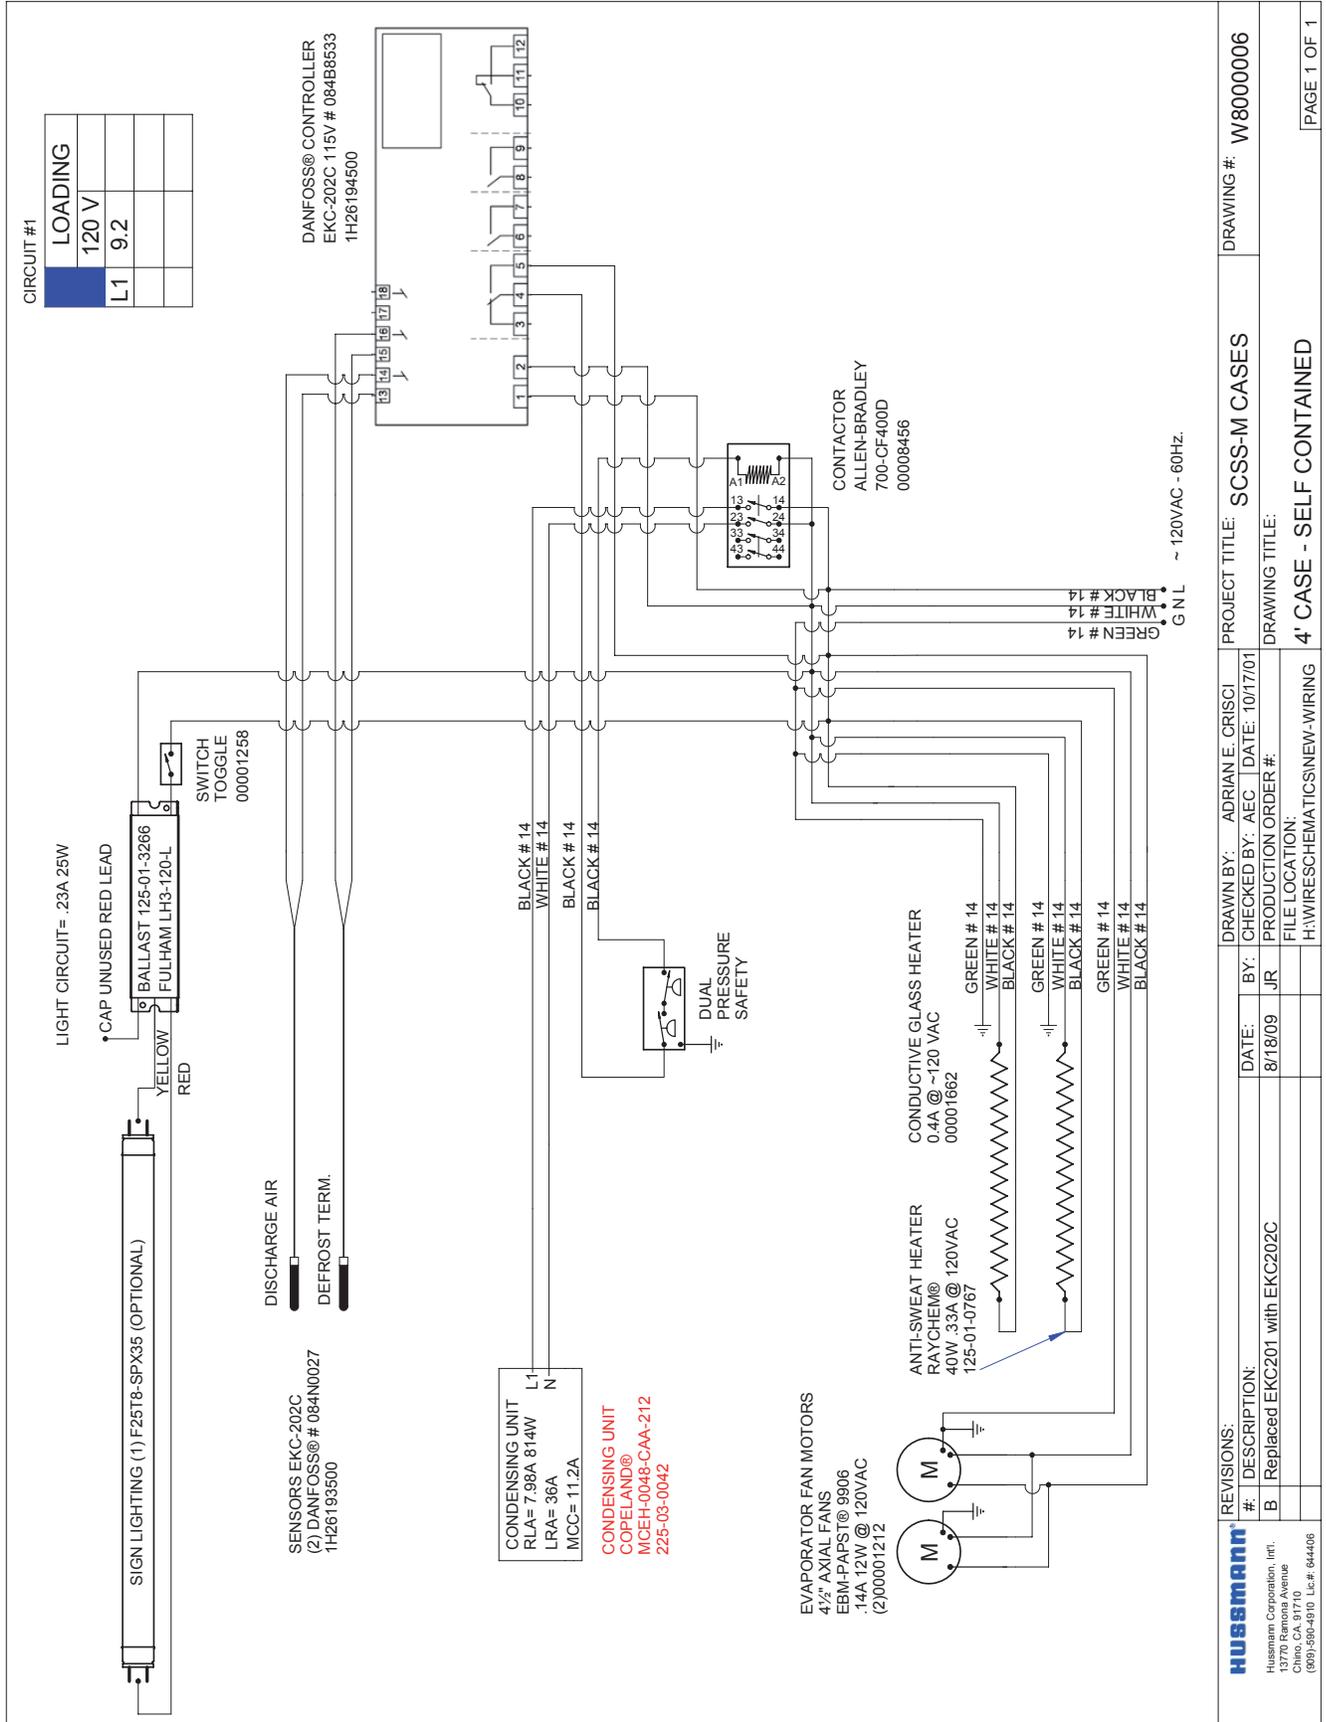


HUSMANN		DRAWN BY: ADRIAN E. CRISCI		PROJECT TITLE: SCSS-M CASES		DRAWING #: W8000006	
# : DESCRIPTION: B Replaced EKC201 with EKC202C		DATE: 8/18/09	BY: JR	DATE: 10/17/01	PRODUCTION ORDER #:	DRAWING TITLE: 4' CASE - SELF CONTAINED	
Hussmann Corporation, Int. 13770 Ramona Avenue Chino, CA 91710 (909) 596-4910 Lic #: 644406		FILE LOCATION: H:\WIRESCHEMATICS\NEW-WIRING		PAGE 1 OF 1			


Wiring Diagrams (Cont'd)

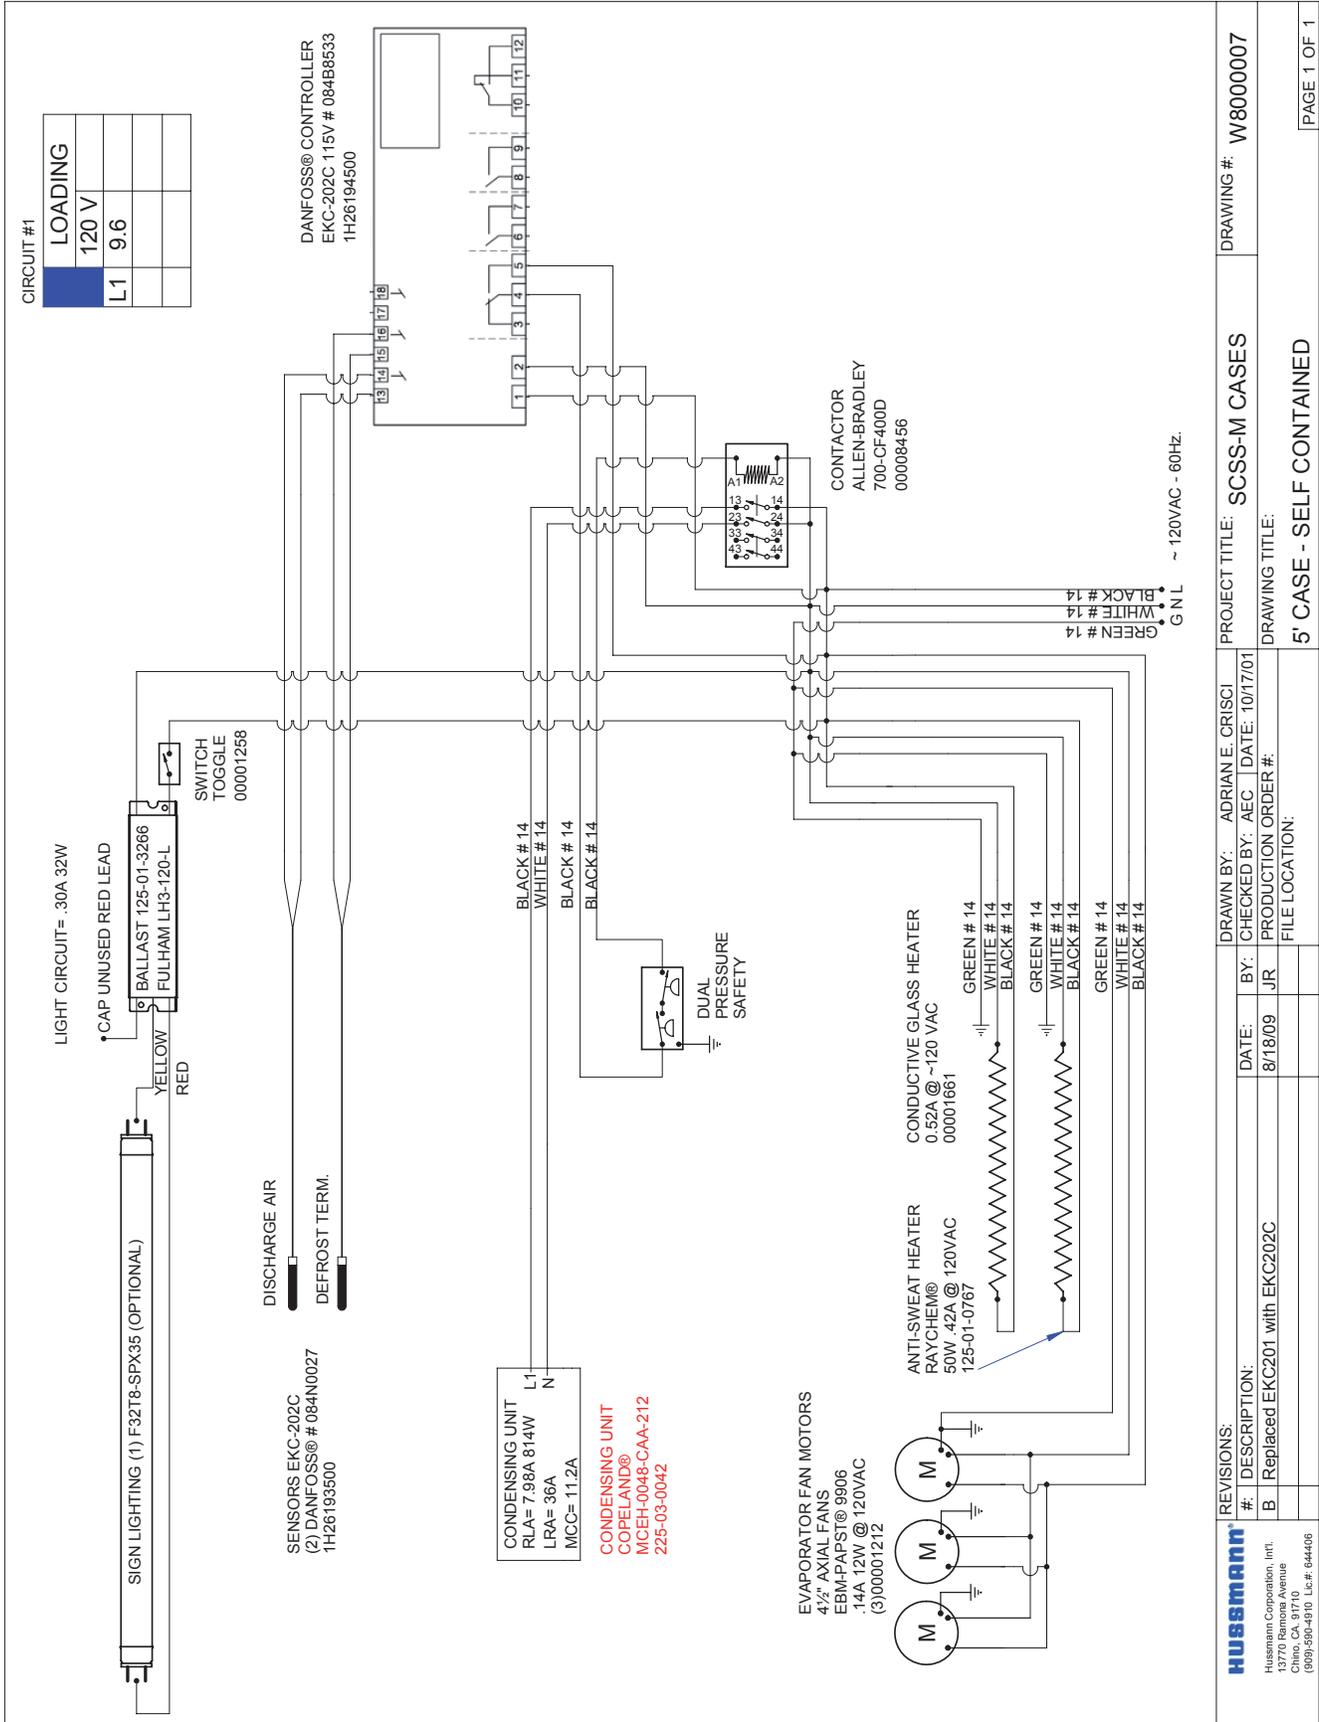

Wiring Diagrams (Cont'd)

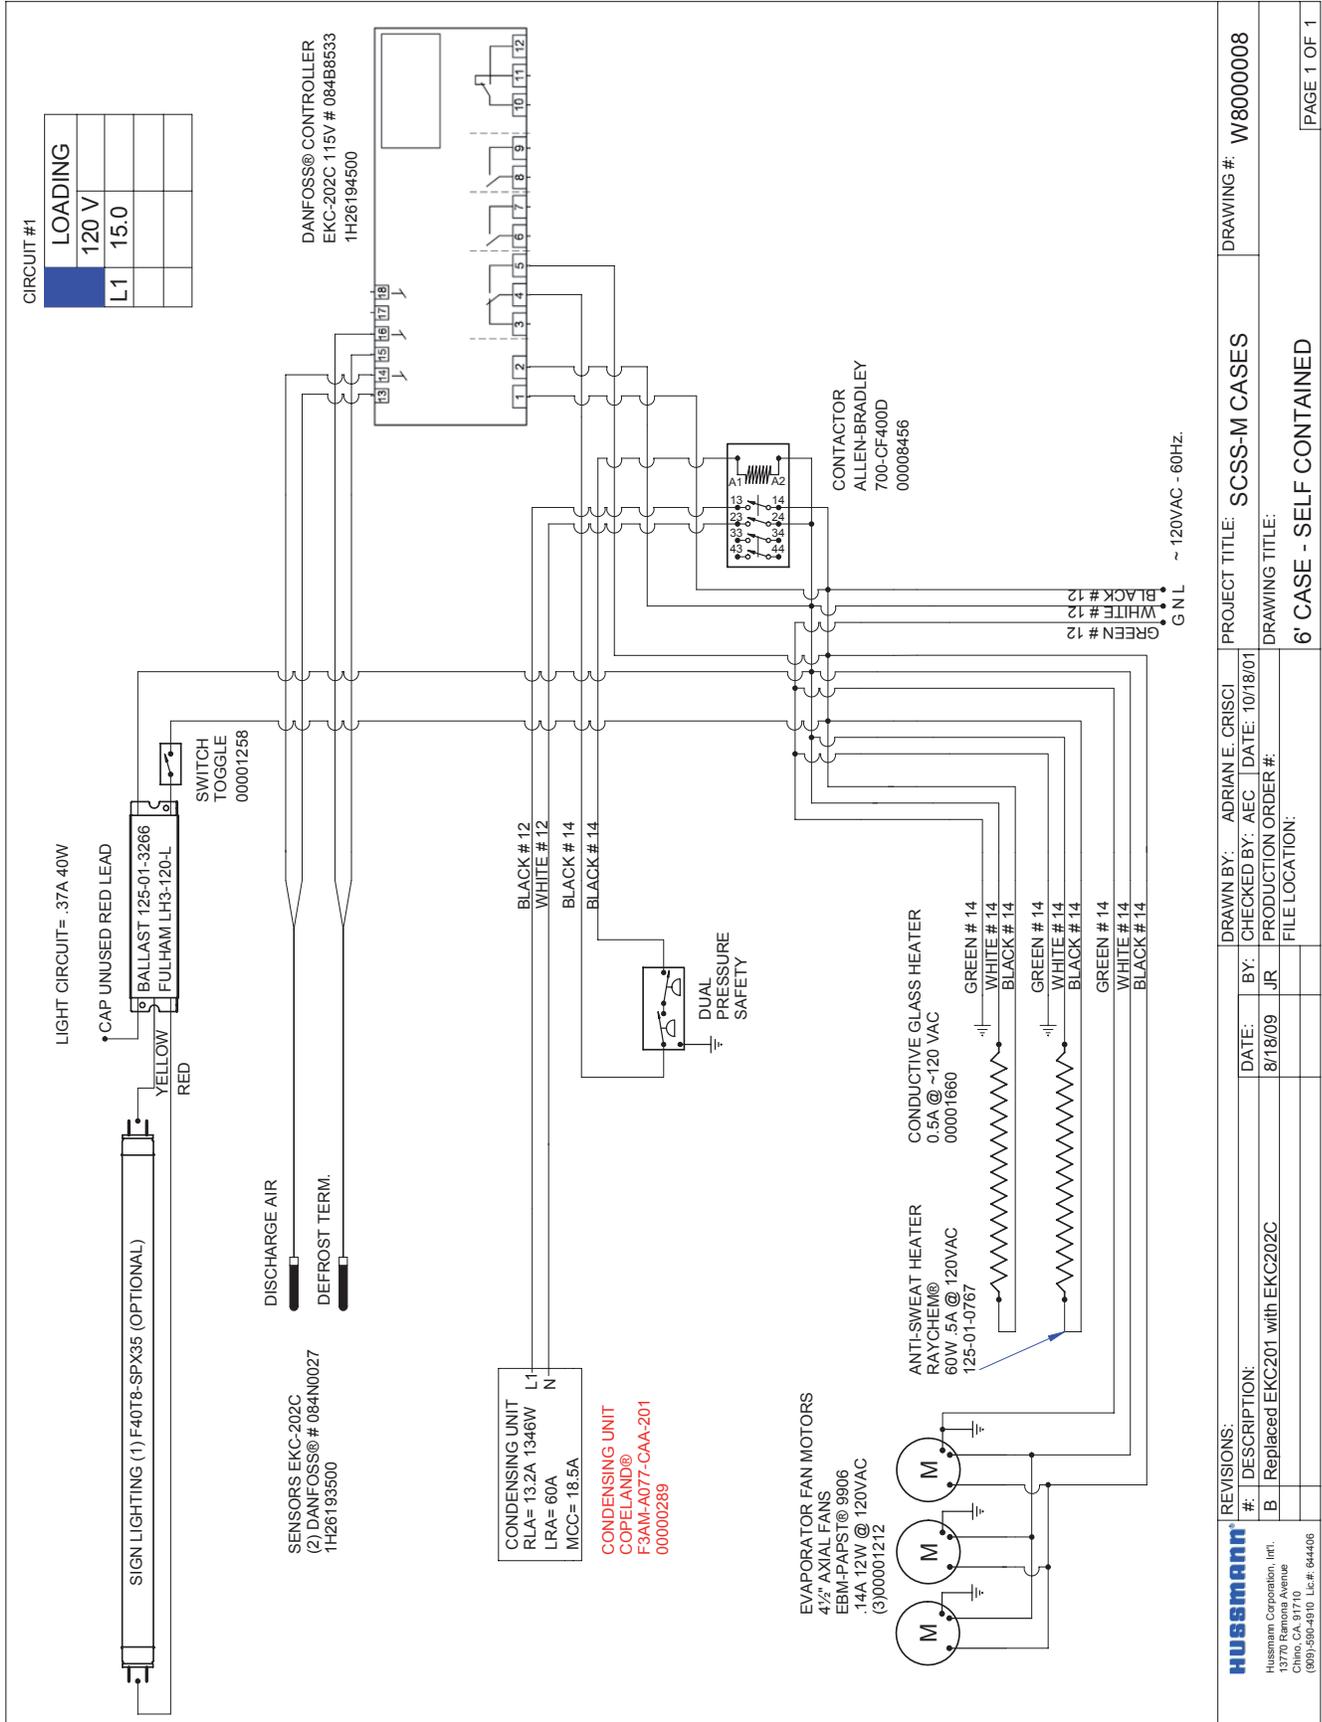


Wiring Diagrams (Cont'd)

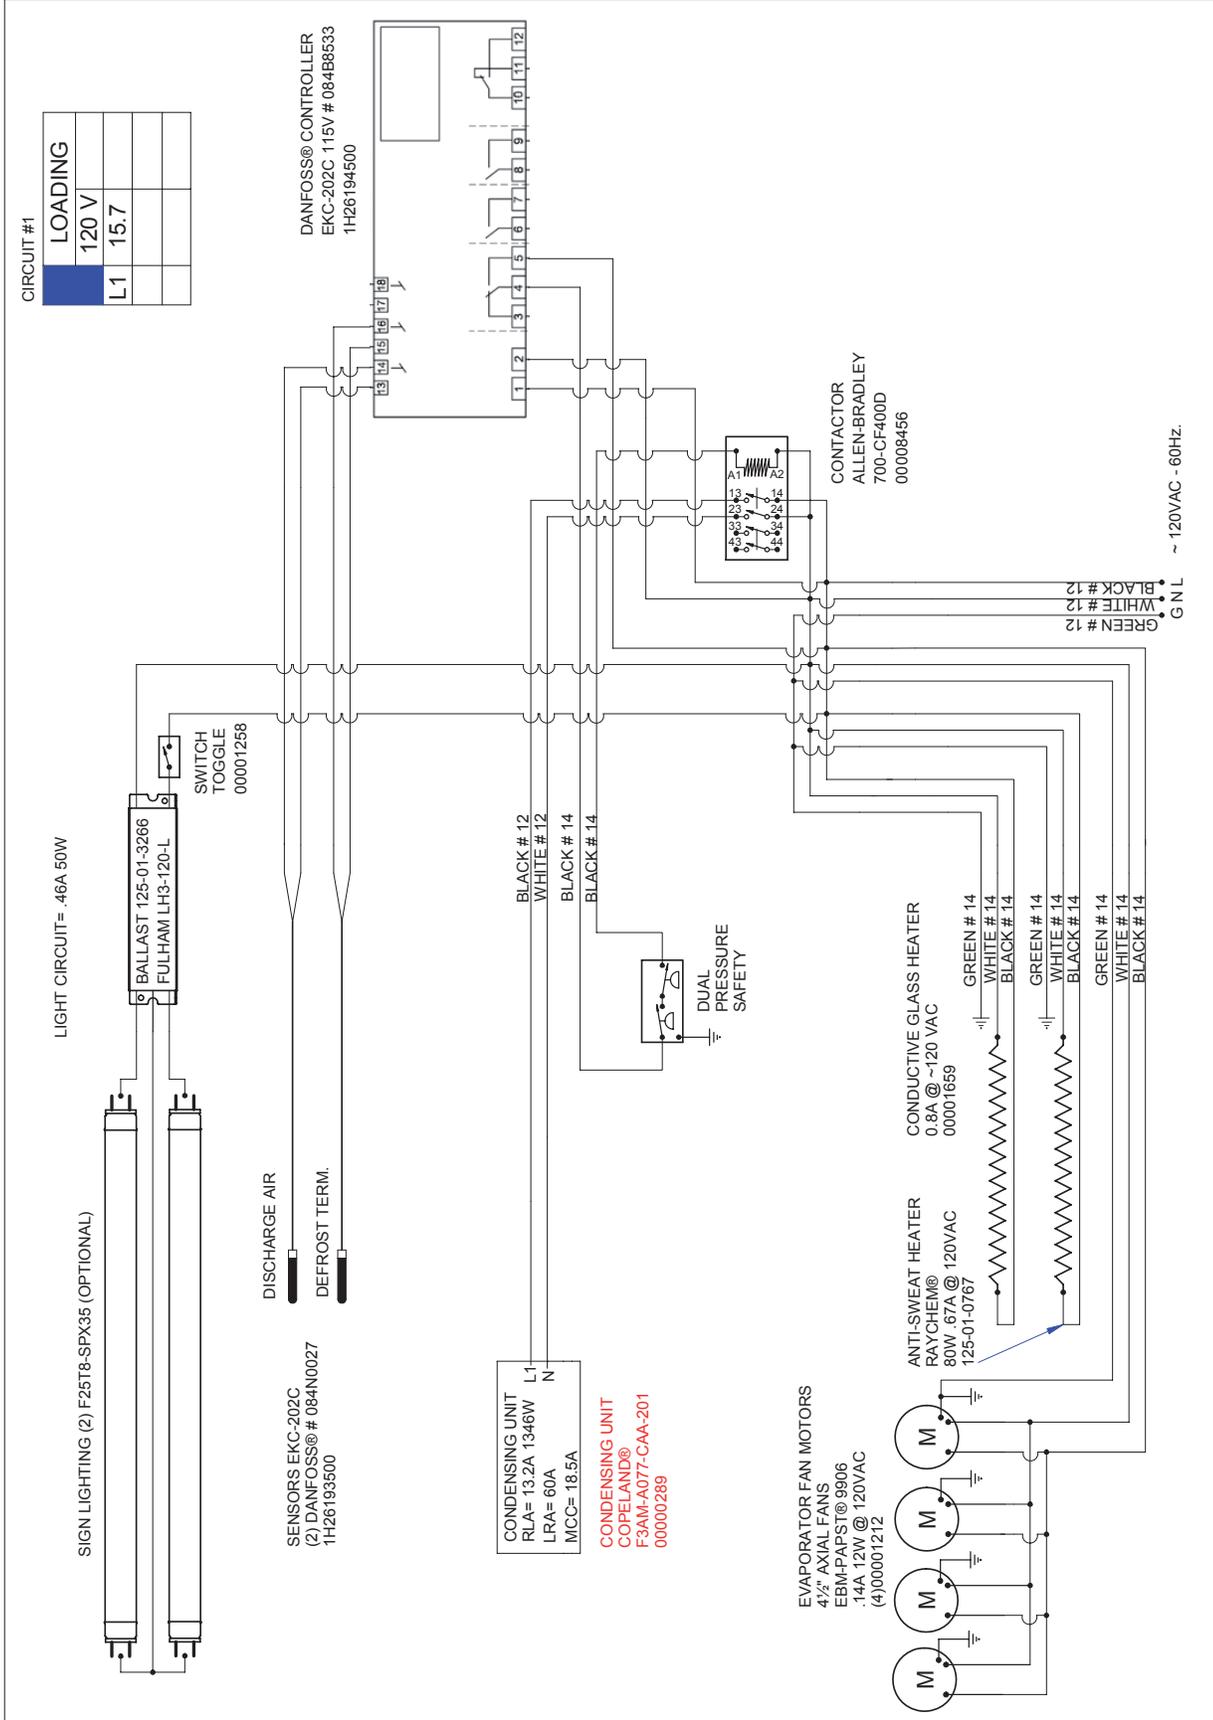


PROJECT TITLE: SCSS-M CASES		DRAWING #: W8000009	
DRAWING TITLE: 8' CASE - SELF CONTAINED		DRAWING TITLE: 8' CASE - SELF CONTAINED	
REVISIONS:	DATE:	BY:	CHECKED BY:
A	10/23/01	JR	ADRIAN E. CRISCI
B	8/18/09	JR	ADRIAN E. CRISCI
DESCRIPTION:		DATE:	
1 REDRAWN TO CORRECT SPECIFICATION		10/23/01	
2 Replaced EKC201 with EKC202C		AEC PRODUCTION ORDER #:	
		FILE LOCATION:	

Wiring Diagrams (Cont'd)

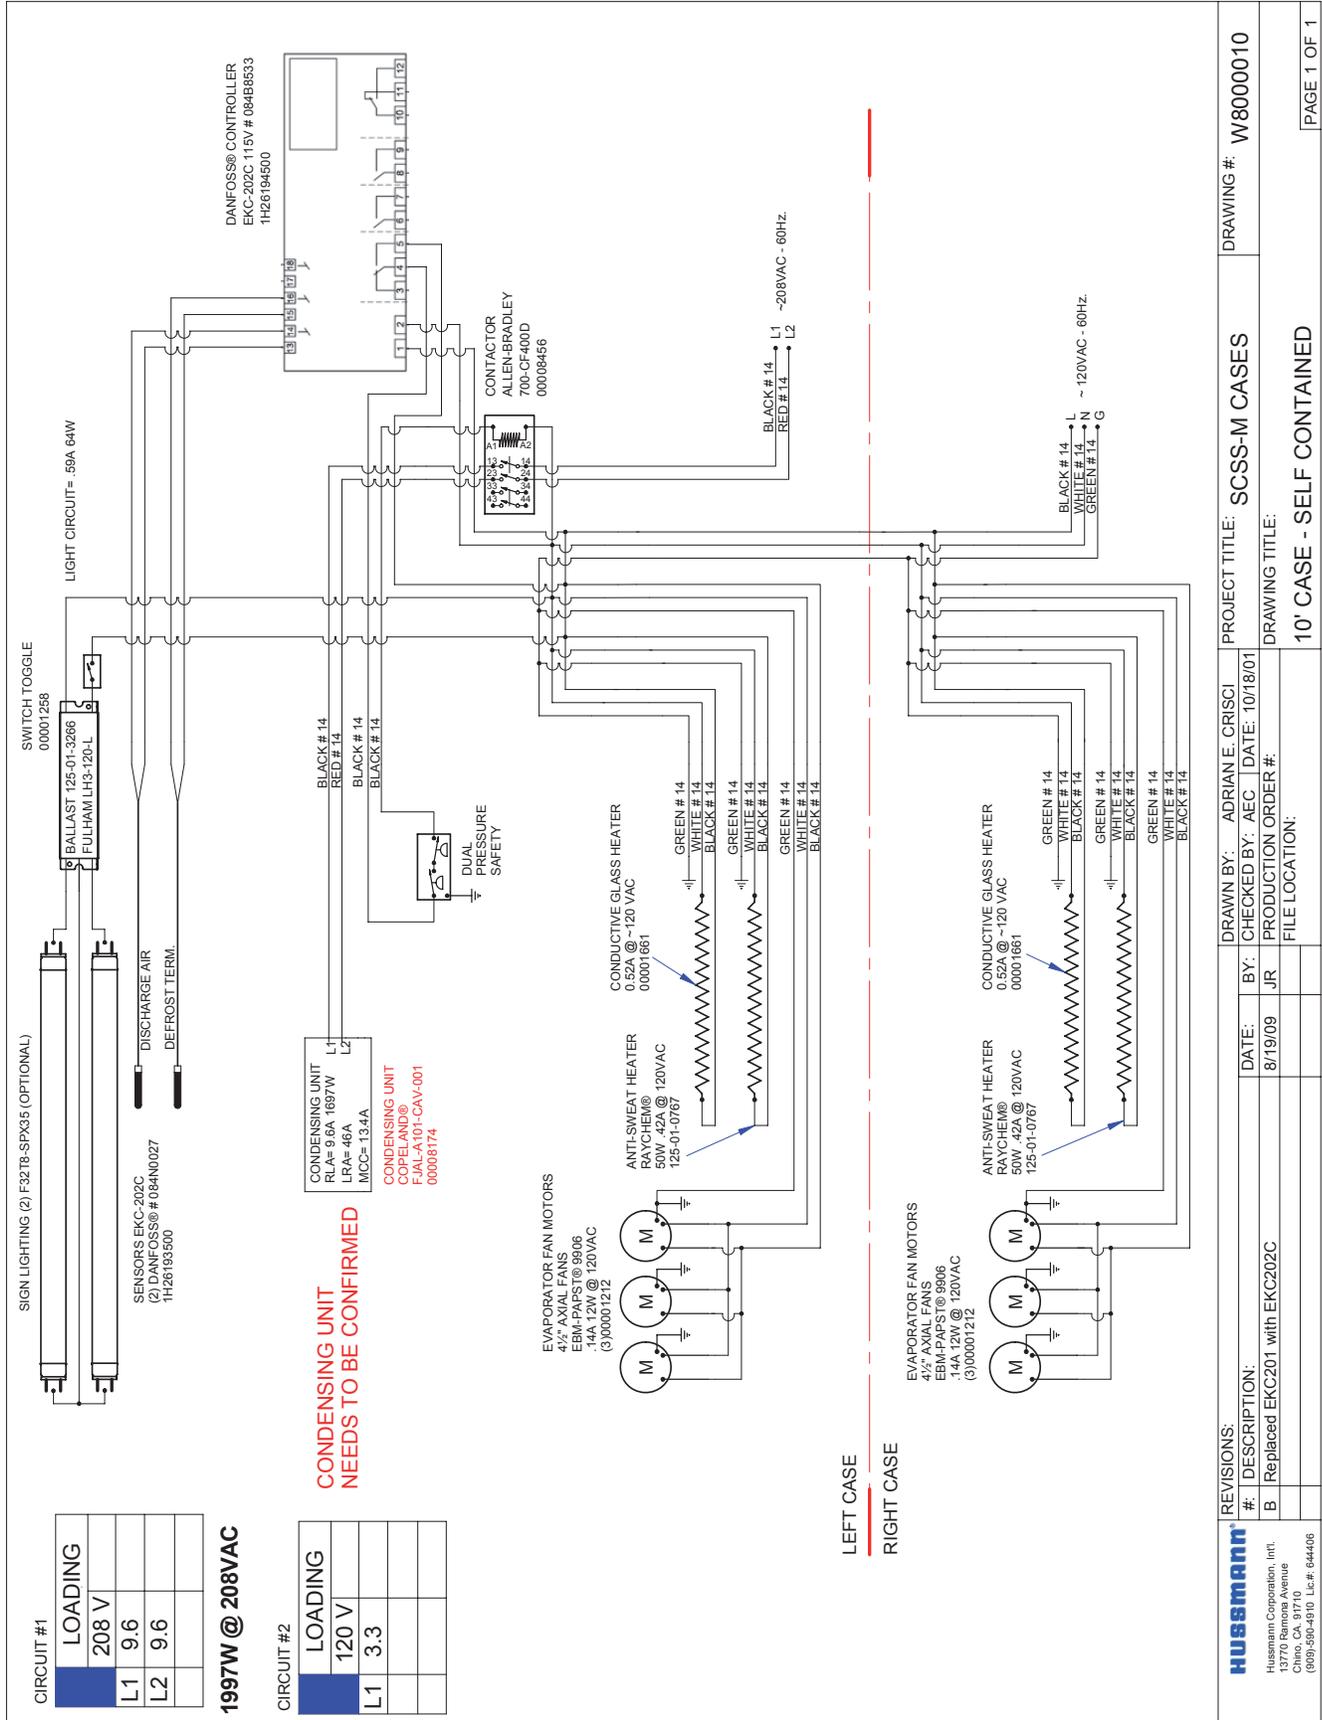

Wiring Diagrams (Cont'd)

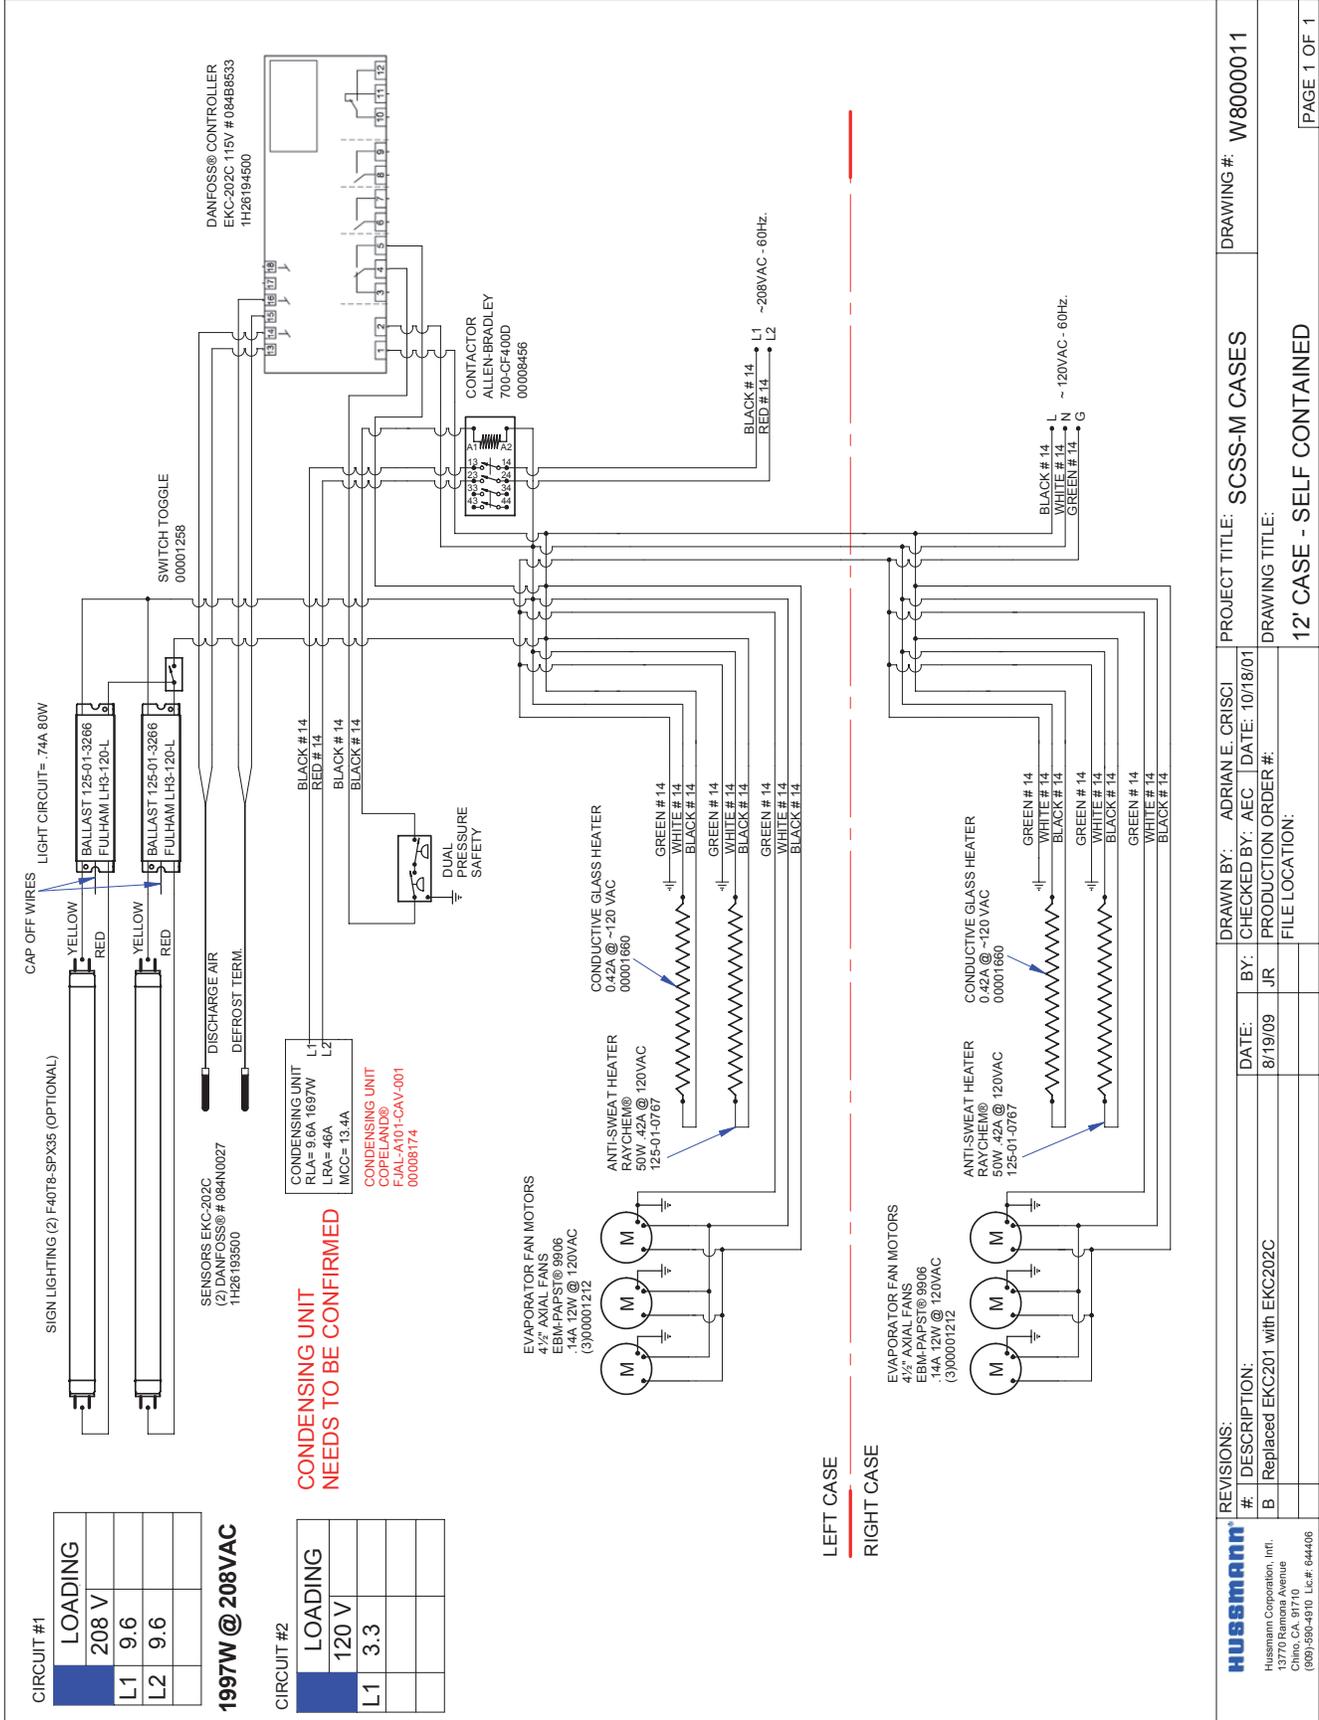

CIRCUIT #1

LOADING	
208 V	
L1	9.6
L2	9.6

1997W @ 208VAC

CIRCUIT #2

LOADING	
120 V	
L1	3.3

REVISIONS:	DRAWN BY: ADRIAN E. CRISCI	PROJECT TITLE: SCSS-M CASES	DRAWING #: W8000011
# 1 DESCRIPTION:	BY: CHECKED BY: AEC	DATE: 10/18/01	
# 2 Replaced EKC201 with EKC202C	DATE: 8/19/09	PRODUCTION ORDER #:	
	FILE LOCATION:		
			12' CASE - SELF CONTAINED
			PAGE 1 OF 1

Wiring Diagrams (Cont'd)


CIRCUIT #1

LOADING	208 V
L1	11.5
L2	11.5

2392W @ 208VAC
NOTE: CASE MUST BE GROUNDED


CIRCUIT #2

LOADING	120 V
L1	1.2

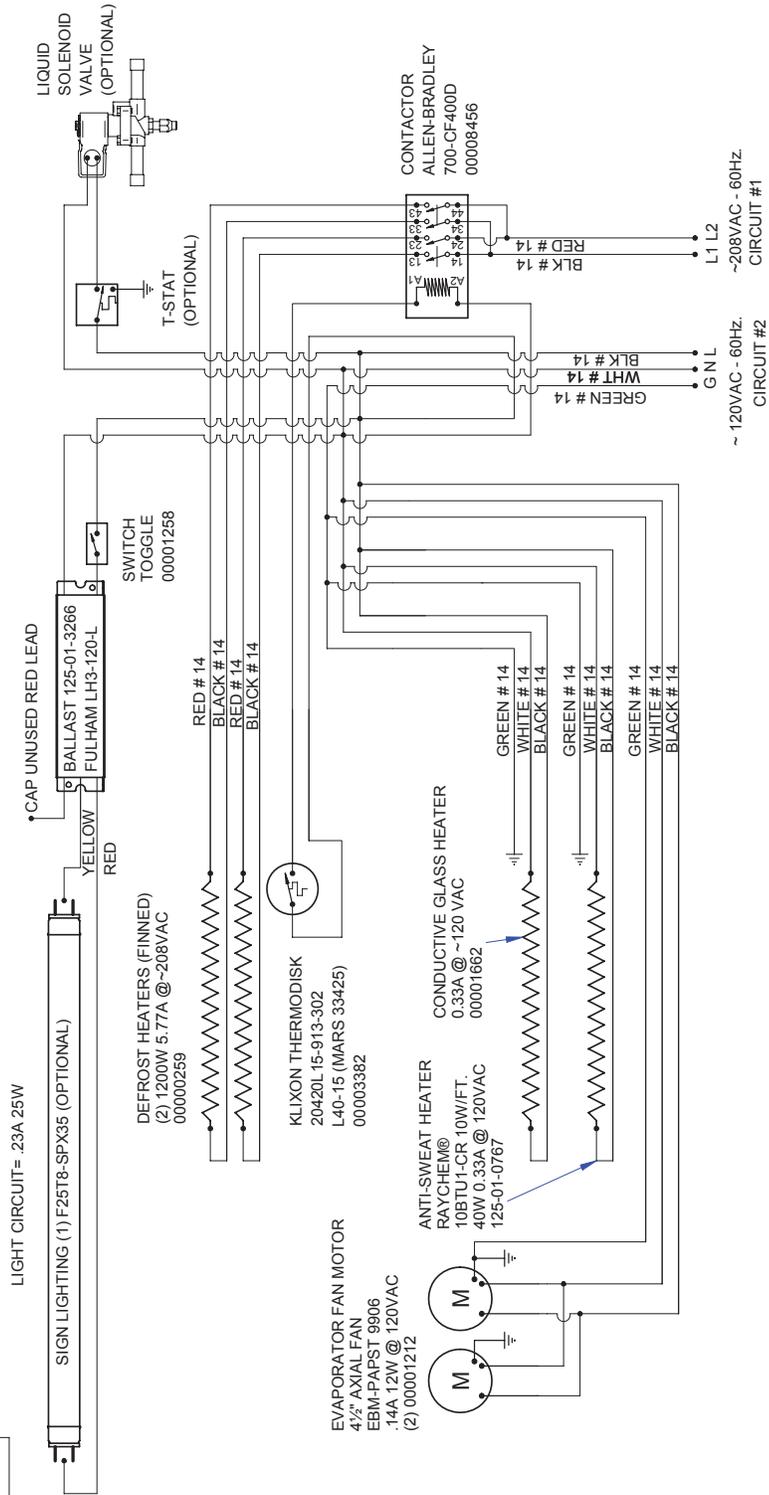

HUSMANN Hussmann Corporation, Inc. 13779 Ramona Avenue Chino, CA 91710 (909) 596-4910 Lic# 644406		REVISIONS: # DESCRIPTION: 1 DELETED TERMINAL BLOCKS&CONNECTORS 04/05/05 D.Q. PRODUCTION ORDER #: B Updated dwg and added load ratings 12/10/08 J.R. FILE LOCATION:	DRAWN BY: ADRIAN E. CRISCI CHECKED BY: AEC DATE: 10/18/01 BY: I.D.Q.	PROJECT TITLE: SCSS-L CASES DRAWING TITLE: 4' CASE - ELECTRIC DEFROST	DRAWING #: W8100000 PAGE 1 OF 1
--	--	---	--	--	------------------------------------


Wiring Diagrams (Cont'd)

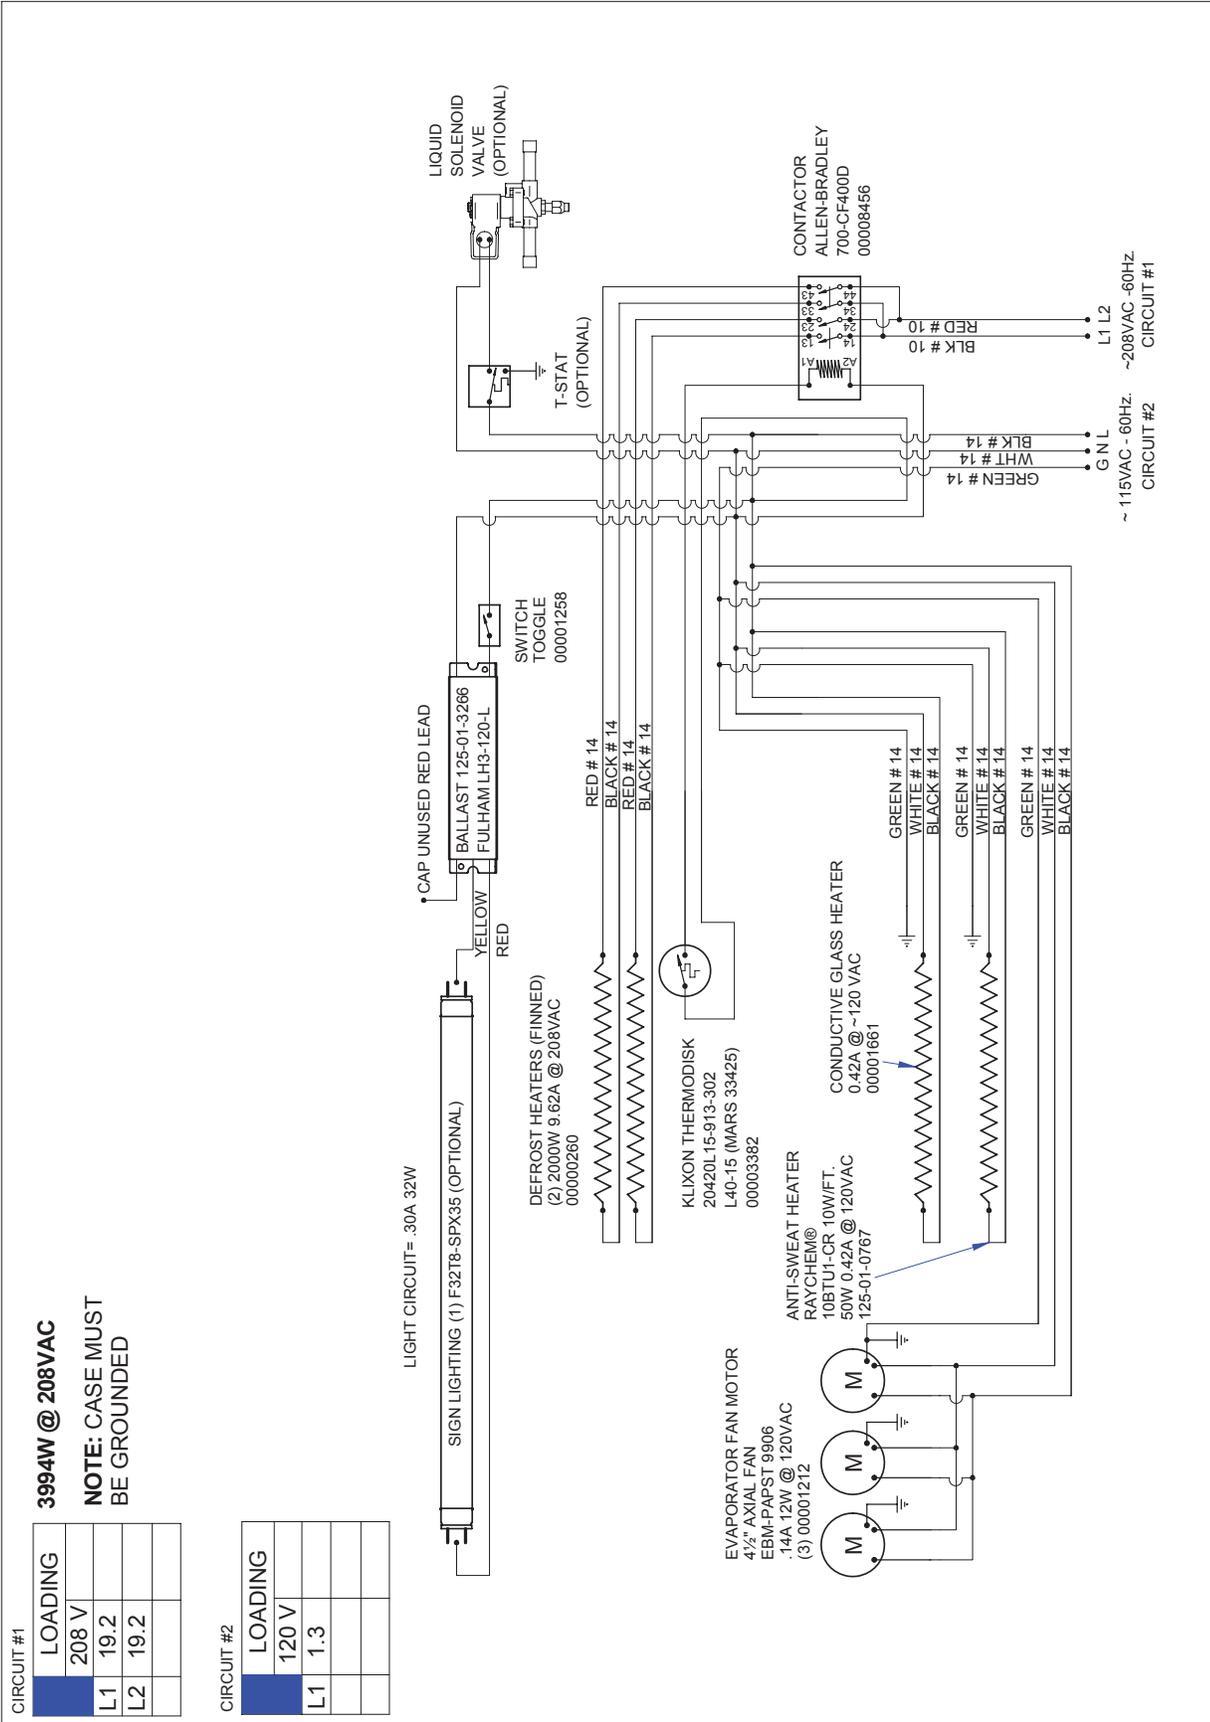

REVISIONS:	DATE:	BY:	DRAWN BY:	PROJECT TITLE:	DRAWING #:
# 1	12/10/08	JR	ADRIAN E. CRISCI	SCSS-L CASES	W8100001
# 2			CHECKED BY: AEC	DRAWING TITLE:	
			PRODUCTION ORDER #:	5' CASE - ELECTRIC DEFROST	
			FILE LOCATION:		PAGE 1 OF 1

HUSSMANN
 Hussmann Corporation, Inc.
 13770 Ramona Avenue
 Chino, CA 91710
 (909) 596-4910 Lic# 644406


Wiring Diagrams (Cont'd)

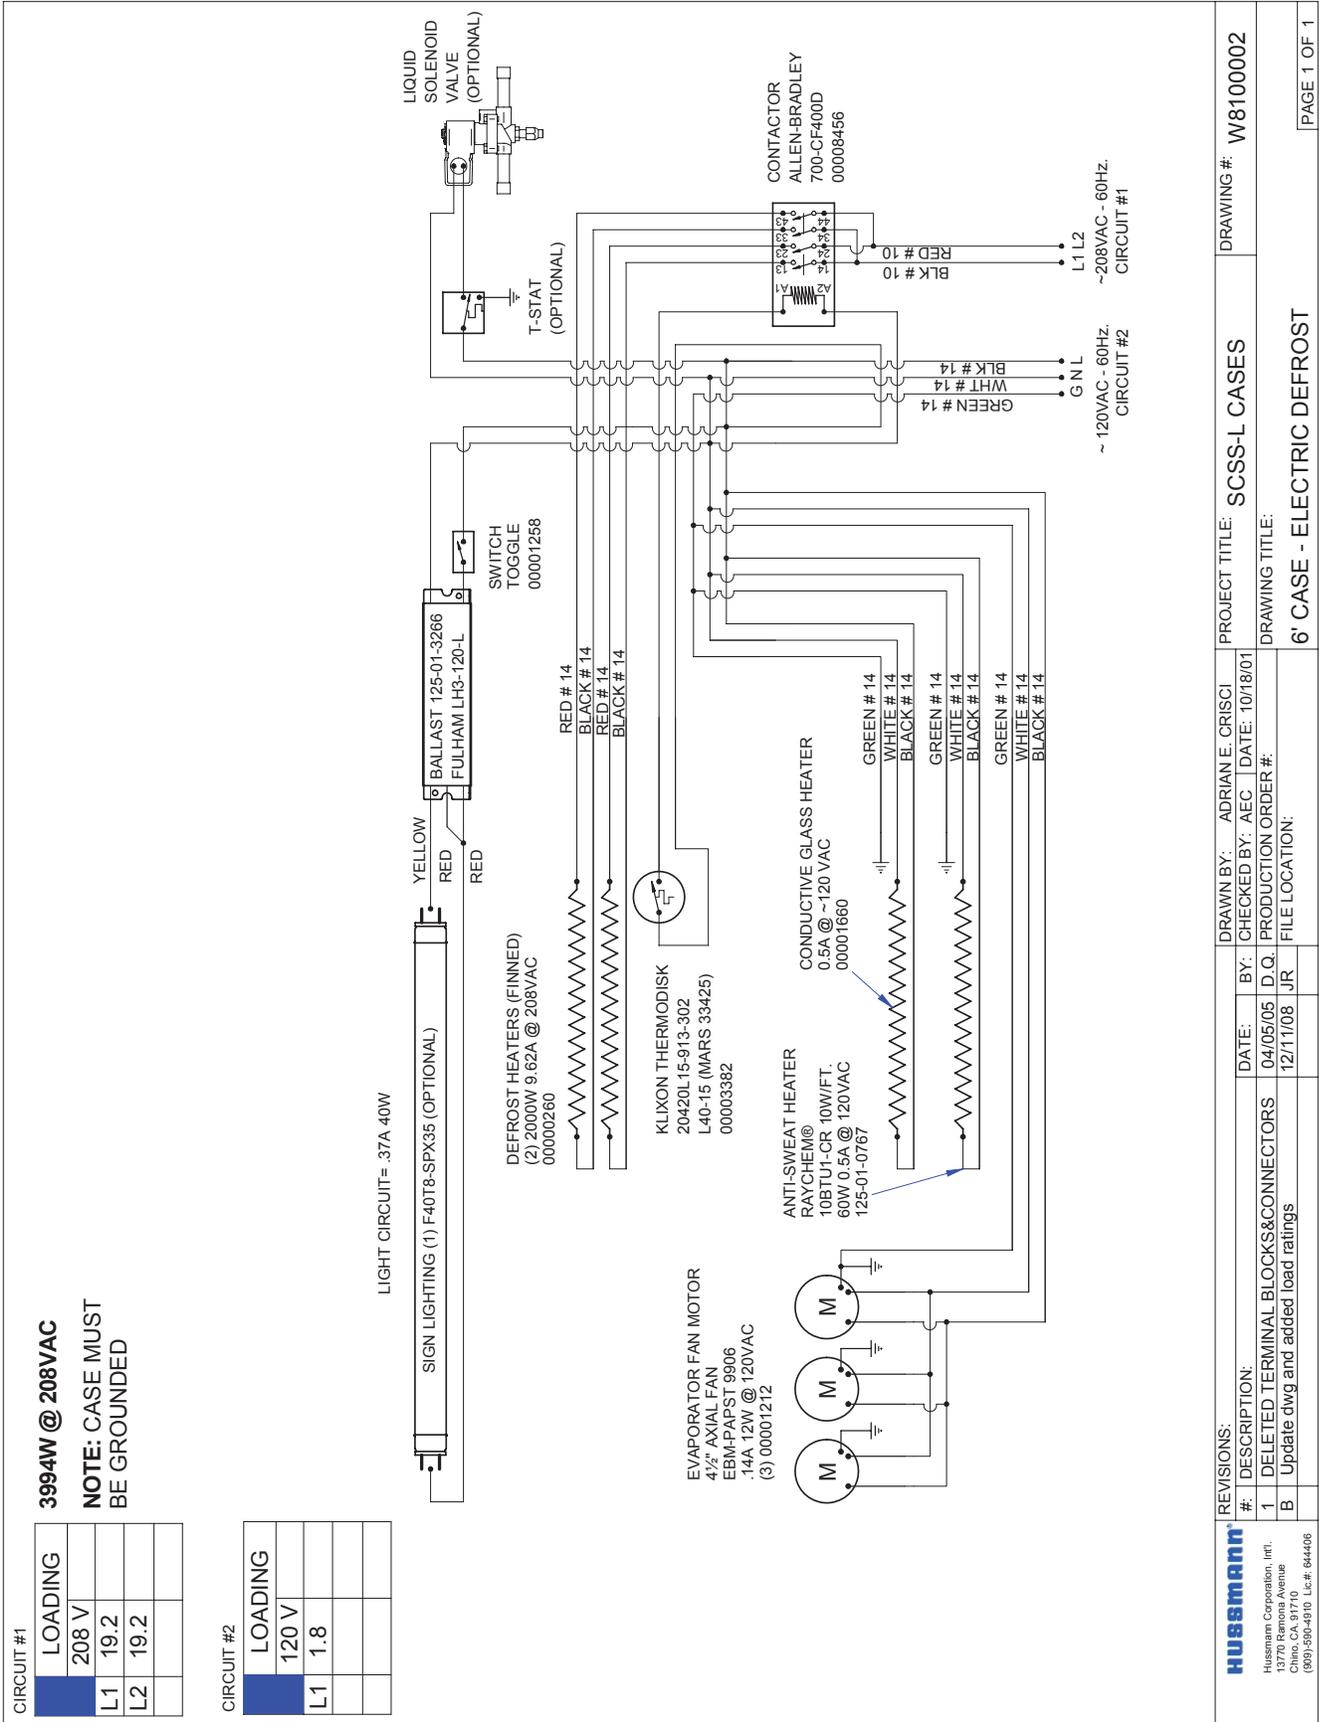

PROJECT TITLE: SCSS-L CASES		DRAWING #: W8100002	
DRAWING TITLE: 6' CASE - ELECTRIC DEFROST		DRAWING #2	
REVISIONS:	ADRIAN E. CRISCI	DATE:	10/18/01
#:	DESCRIPTION:	BY:	CHECKED BY: AEC
1	DELETED TERMINAL BLOCKS&CONNECTORS	04/05/05	D.Q.
B	Update dwg and added load ratings	12/11/08	JR
FILE LOCATION:		PRODUCTION ORDER #:	


HUSSMANN
 Hussmann Corporation, Int.
 13770 Ramona Avenue
 Chino, CA 91710
 (909) 596-4910 Lic.# 644406

Wiring Diagrams (Cont'd)

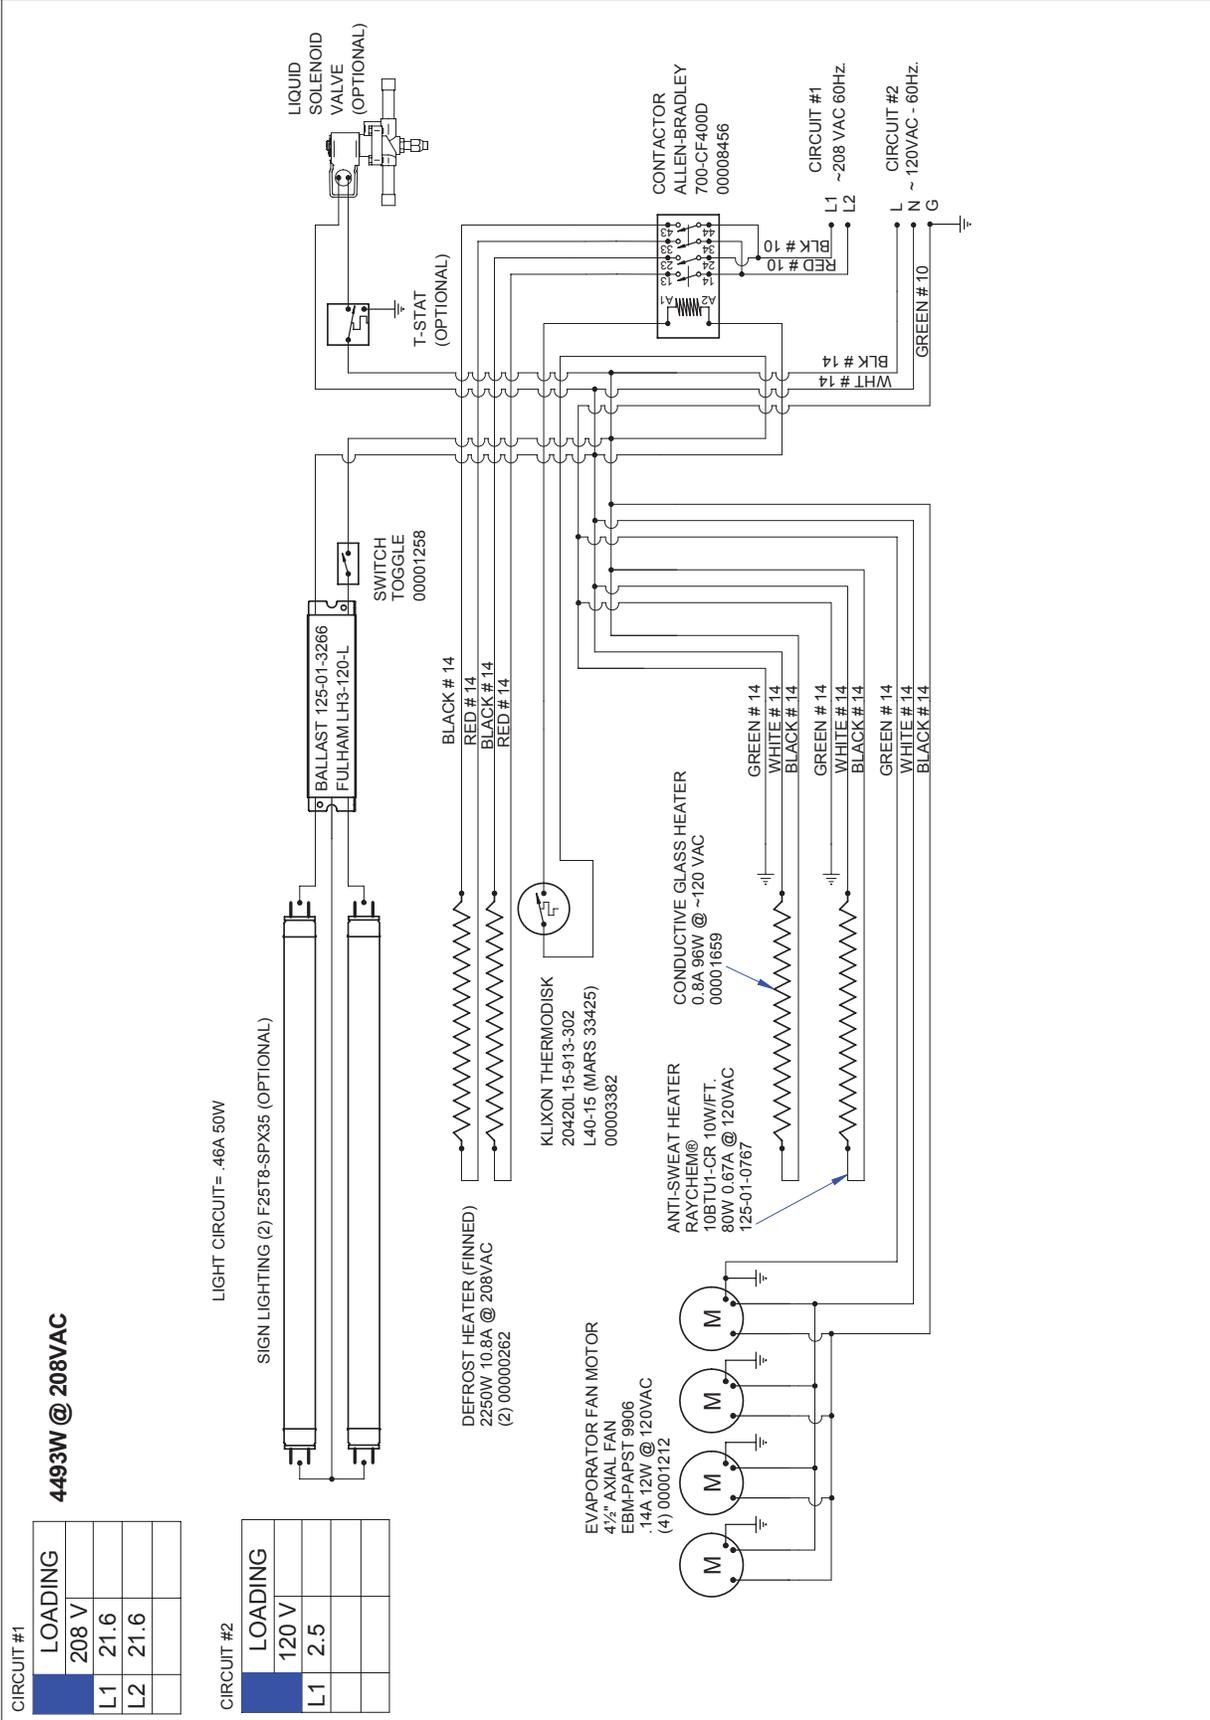

REVISIONS:		DRAWN BY: ADRIAN E. CRISCI	PROJECT TITLE: SCSS-L CASES	DRAWING #: W8100003
#	DESCRIPTION:	DATE:	BY:	CHECKED BY:
B	DELETED TERMINAL BLOCKS & CONNECTORS	04/05/05	D.Q.	10/18/01
C	Updated dwg; added load ratings	2/29/08	JR	
D	Removed fuses; added ratings for 120V circuit	11/21/08	JR	
FILE LOCATION:			DRAWING TITLE:	
			8' CASE - ELECTRIC DEFROST	
				PAGE 1 OF 1


Wiring Diagrams (Cont'd)

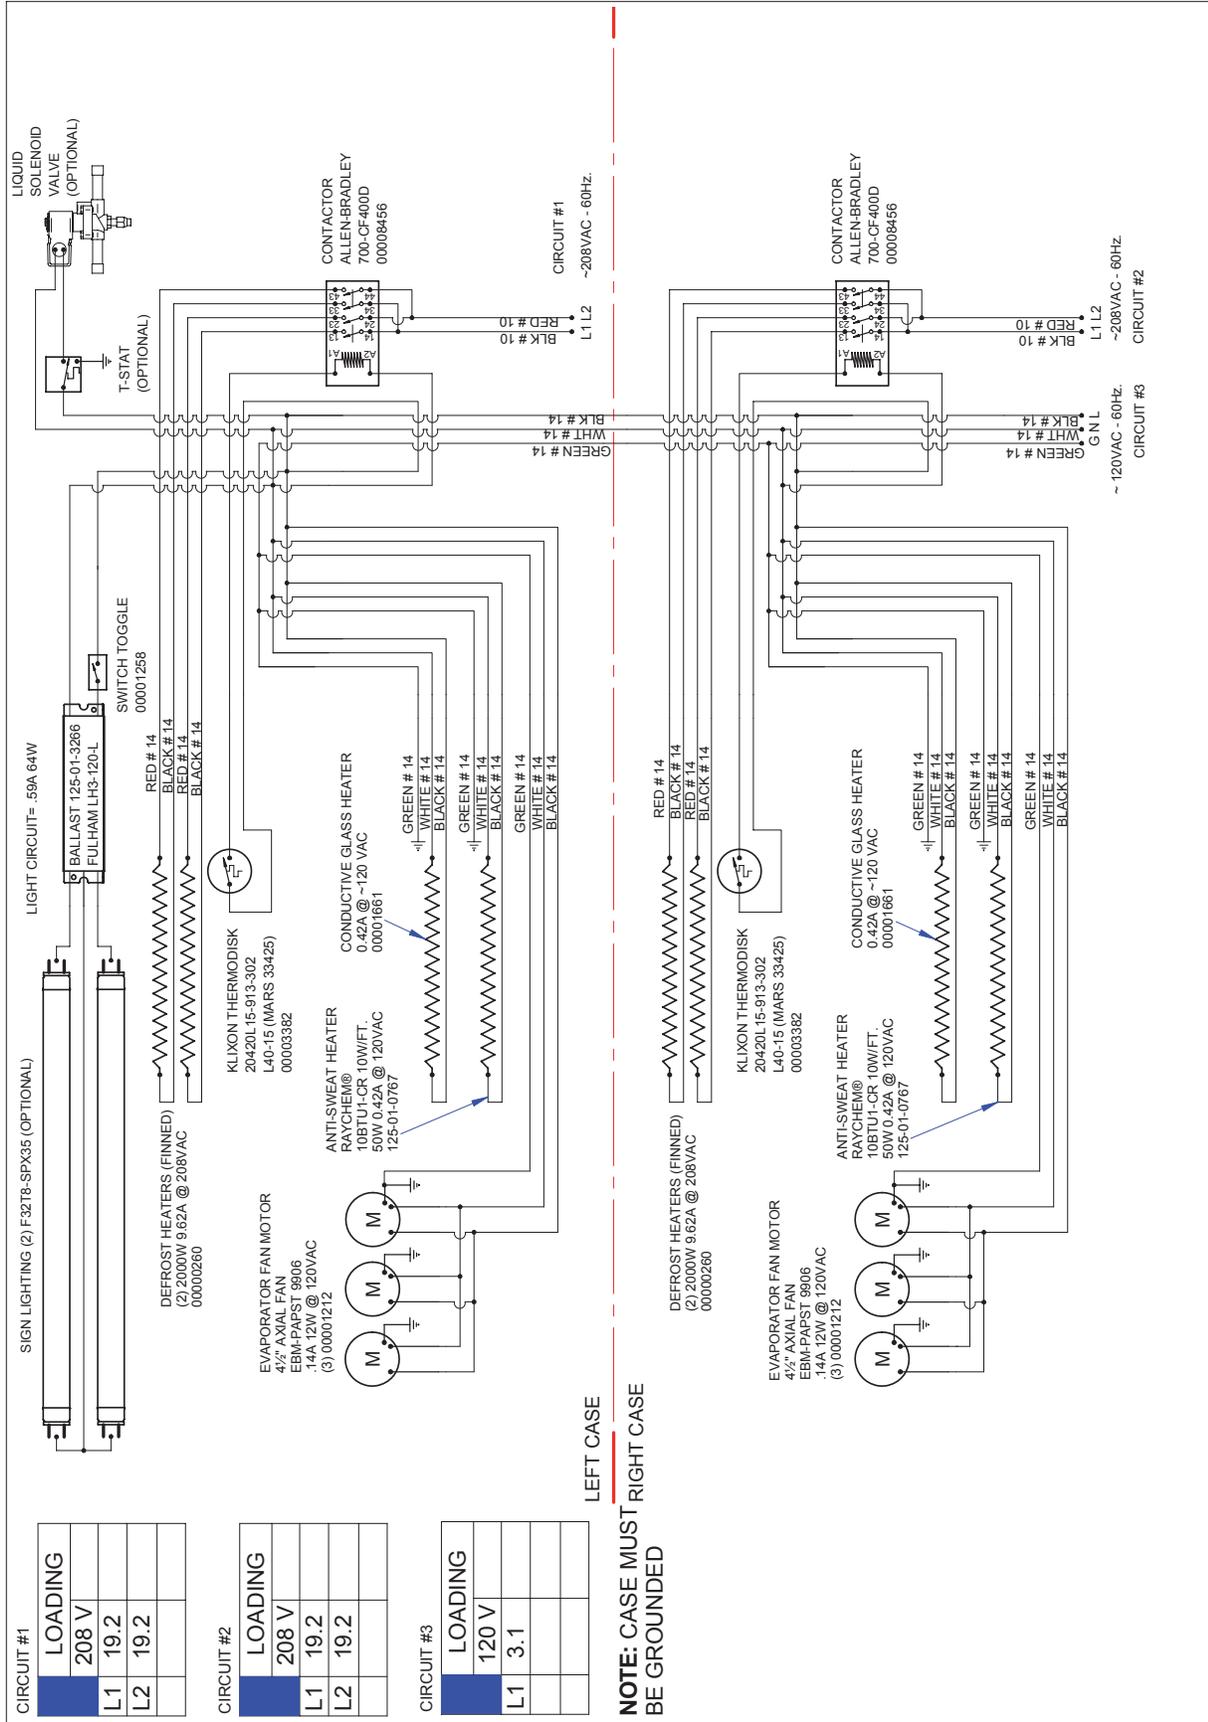

LEFT CASE
NOTE: CASE MUST RIGHT CASE BE GROUNDED

REVISIONS: # DESCRIPTION 1 DELETED TERMINAL BLOCKS&CONNECTORS B Updated dwg and added load ratings		DRAWN BY: ADRIAN E. CRISCI BY: AEC DATE: 10/18/01 04/05/05 D.Q. 12/11/08 JR FILE LOCATION:	PROJECT TITLE: SCSS-L CASES DRAWING TITLE: 10' CASE - ELECTRIC DEFROST	DRAWING #: W8100004 PAGE 1 OF 1
--	--	---	---	------------------------------------


Wiring Diagrams (Cont'd)

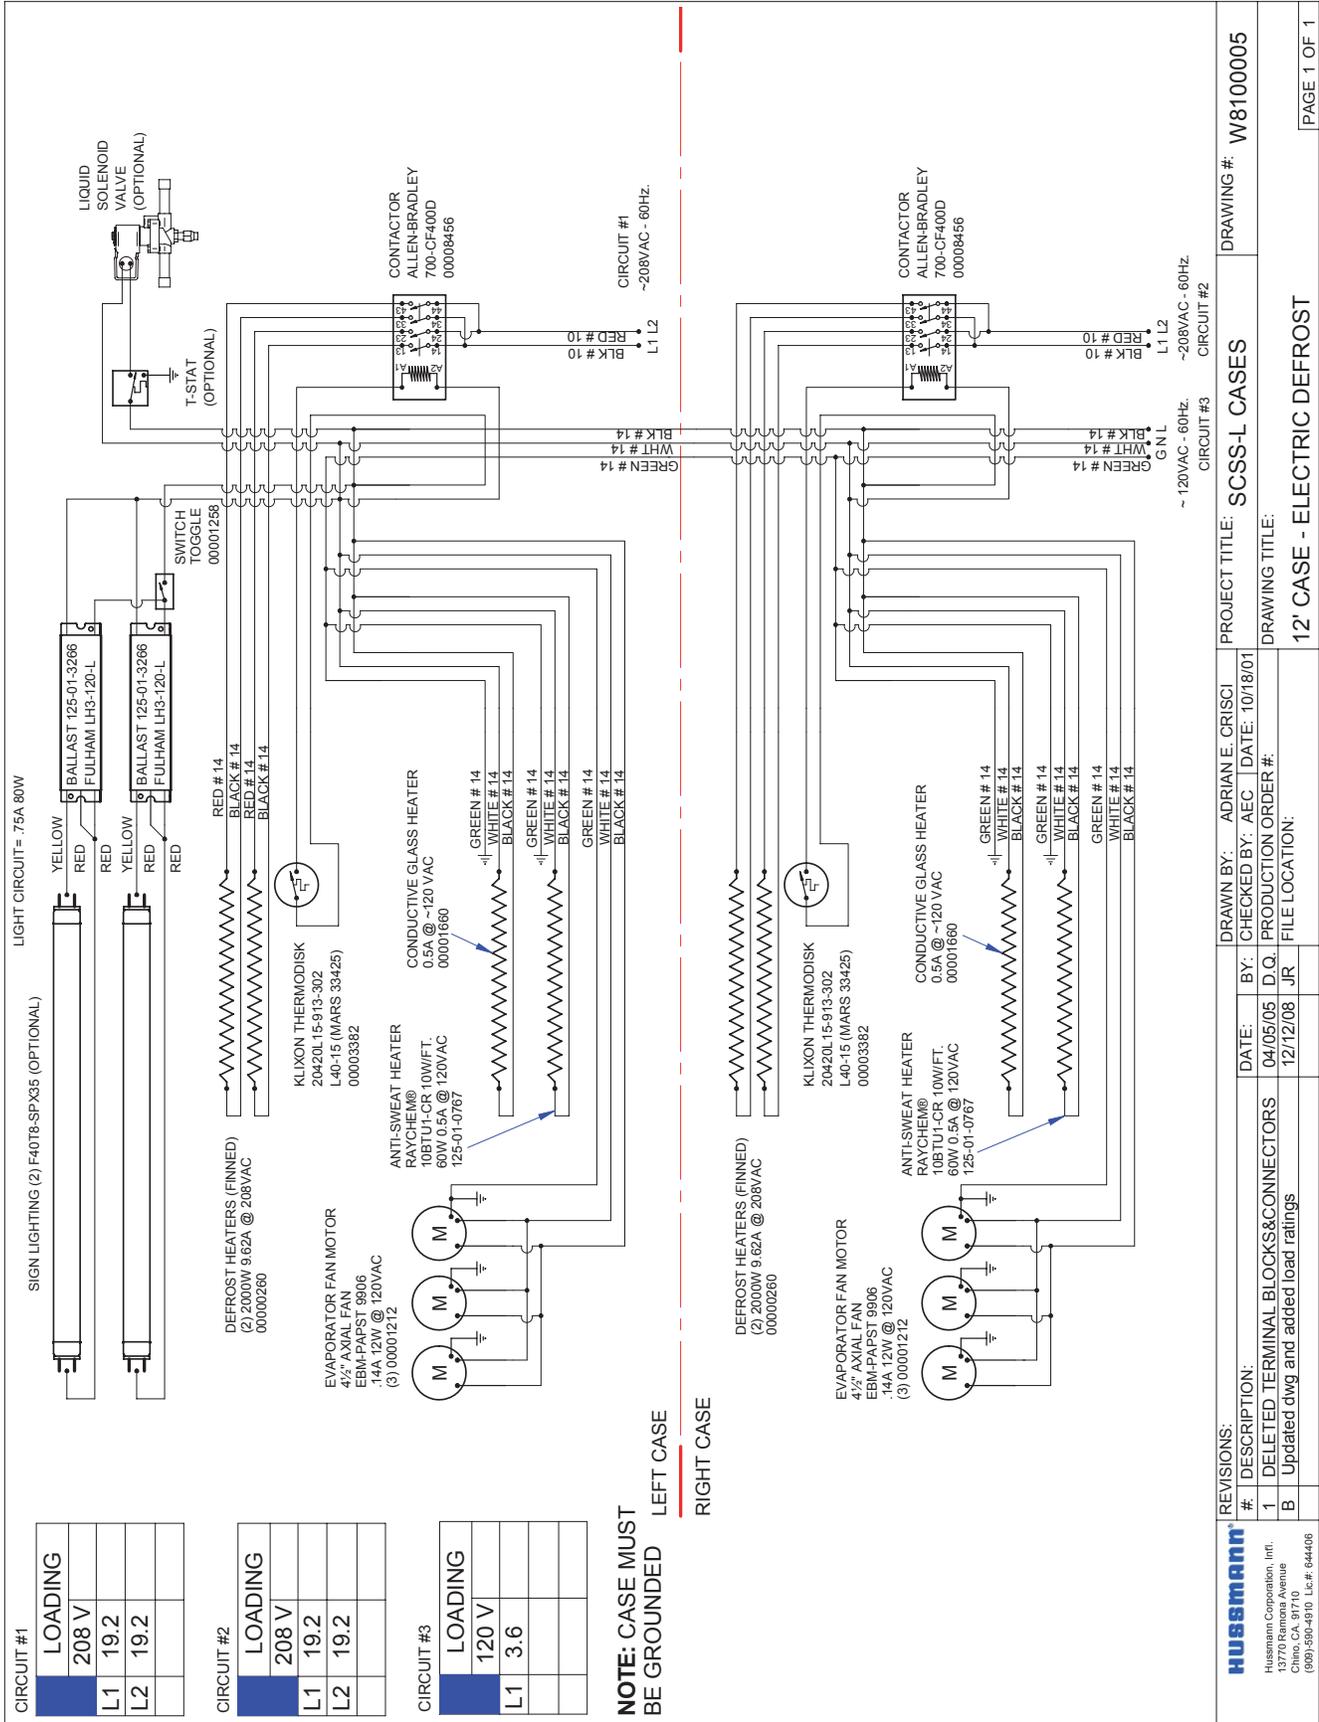

LOADING 208 V L1 19.2 L2 19.2		LOADING 208 V L1 19.2 L2 19.2		LOADING 120 V L1 3.6	
CIRCUIT #1 LIGHT CIRCUIT= 75A 80W SIGN LIGHTING (2) F40T8-SPX35 (OPTIONAL) BALLAST 125-01-3266 FULHAM LH3-120-L BALLAST 125-01-3266 FULHAM LH3-120-L SWITCH TOGGLE 00001258 T-STAT (OPTIONAL) LIQUID SOLENOID VALVE (OPTIONAL) DEFROST HEATERS (FINNED) (2) 2000W 9.62A @ 208VAC 00000260 EVAPORATOR FAN MOTOR 4 1/2" AXIAL FAN EBM-PAPST 9906 .14A 12W @ 120VAC (3) 00001212 KLIXON THERMODISK 20420L-15-913-302 L40-15 (MARS 33425) 00003382 ANTI-SWEAT HEATER RAYCHEM® 10BTU1-CR 10W/FT. 60W 0.5A @ 120VAC 125-01-0767 CONDUCTIVE GLASS HEATER 0.5A @ -120 VAC 00001660		CONTACTOR ALLEN-BRADLEY 700-CF400D 00008456 CIRCUIT #1 ~208VAC - 60Hz. BLK # 14 WHT # 14 GRN # 14 L1 L2 RED # 10		CONTACTOR ALLEN-BRADLEY 700-CF400D 00008456 CIRCUIT #2 ~208VAC - 60Hz BLK # 14 WHT # 14 GRN # 14 G.N.L. L1 L2 RED # 10	
DATE: 04/05/05 BY: DELETED TERMINAL BLOCKS&CONNECTORS 12/12/08 JR FILE LOCATION:		DRAWN BY: ADRIAN E. CRISCI CHECKED BY: AEC DATE: 10/18/01		PROJECT TITLE: SCSS-L CASES DRAWING #: W8100005	
REVISIONS: # 1 DESCRIPTION: 1 DELETED TERMINAL BLOCKS&CONNECTORS Updated dwg and added load ratings		DATE: 04/05/05 BY: DELETED TERMINAL BLOCKS&CONNECTORS 12/12/08 JR FILE LOCATION:		DRAWING TITLE: 12' CASE - ELECTRIC DEFROST	


HUSSMANN
 Hussmann Corporation, Inc.
 13779 Ramona Avenue
 Chino, CA 91710
 (951) 596-4910 Lic# 644406

Wiring Diagrams (Cont'd)

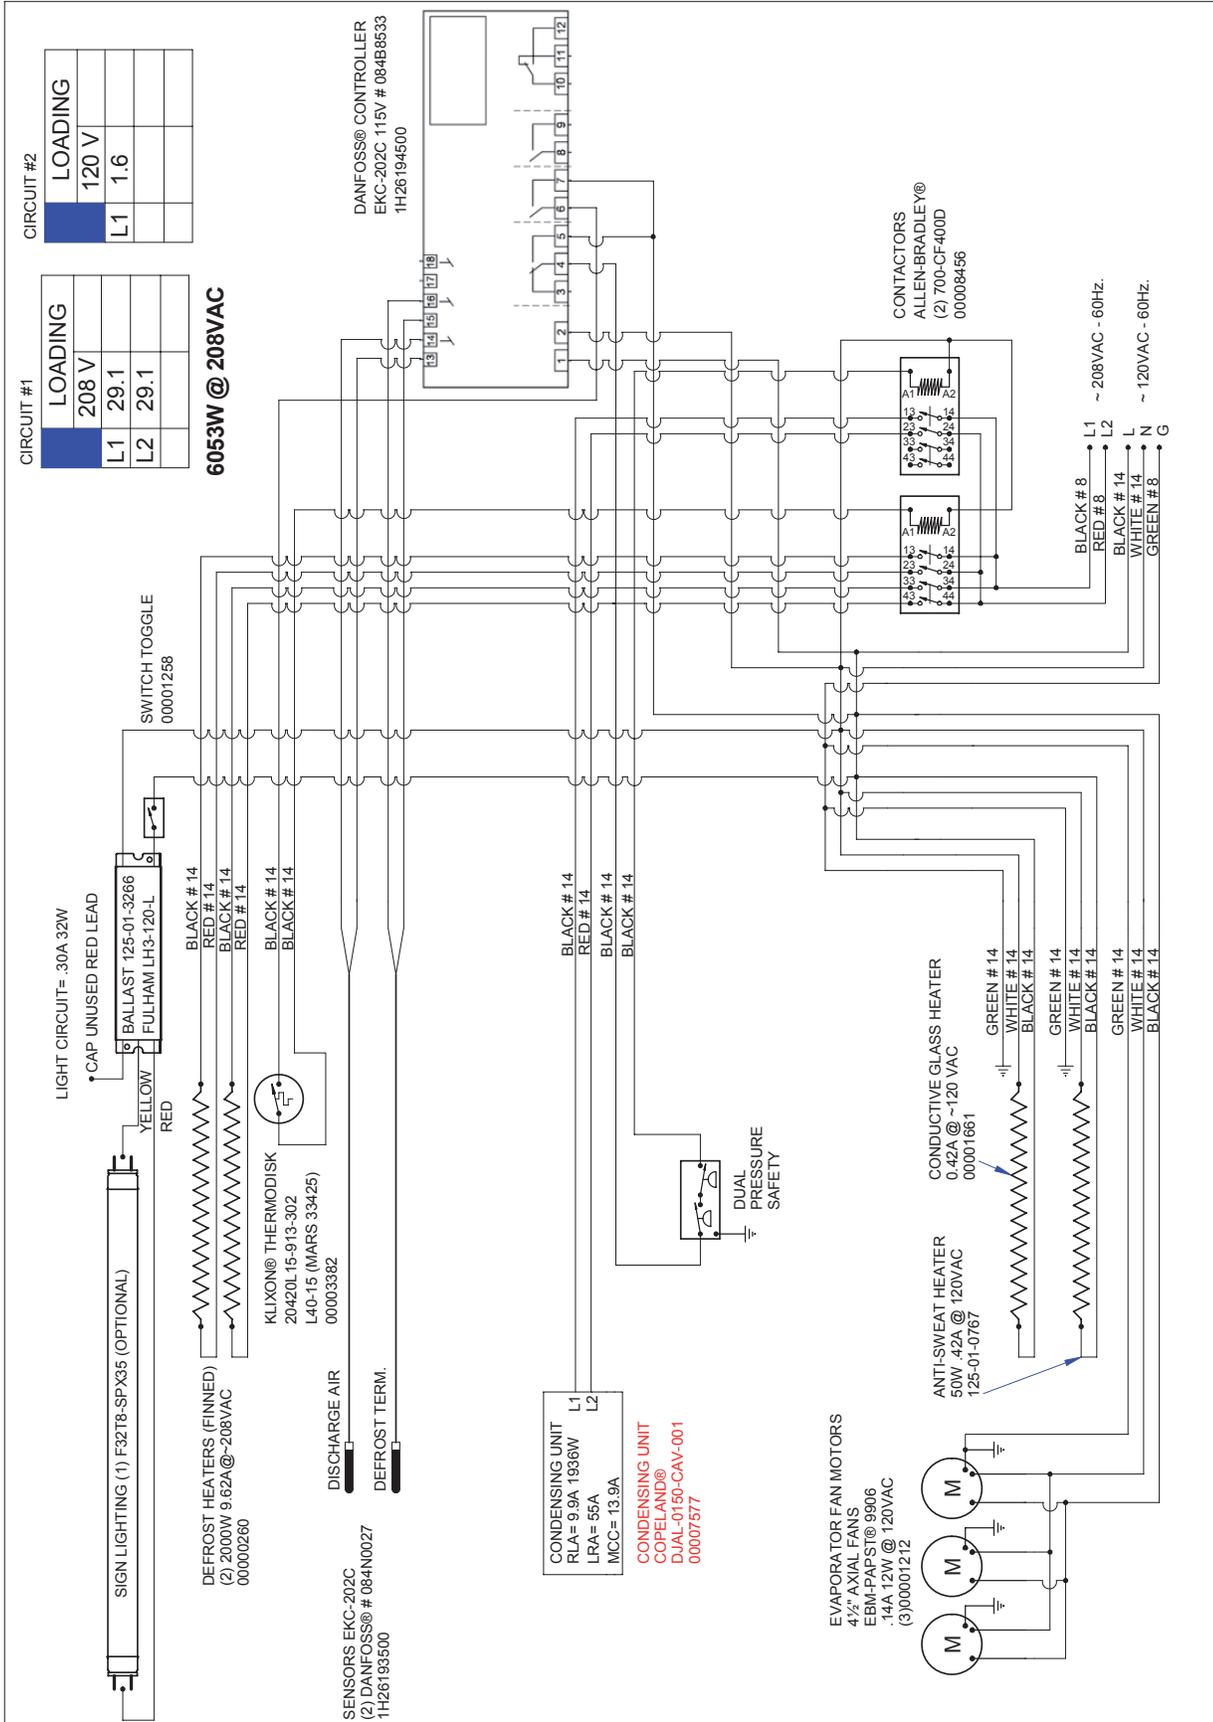


DRAWN BY: ADRIAN E. CRISCI		PROJECT TITLE: SCSS-L CASES		DRAWING #: W8100007	
DATE: 03/22/02	BY: AEC	FILE LOCATION:	DATE: 10/18/01	FILE LOCATION:	DATE: 10/18/01
8/17/09	JR	8/17/09	JR	8/17/09	JR
REVISIONS:		DRAWING TITLE: 5' CASE - ELECTRIC DEFROST - SELF CONTAINED			
#	DESCRIPTION:				
1	PRES CONTROL WIRED INSIDE C-UNIT				
B	Replaced EKC201 control with EKC202C				
HUSMANN		PAGE 1 OF 1			
Husmann Corporation, Int. 13770 Ramona Avenue Chino, CA 91710 (951) 596-4910 Lic# 644406					

Wiring Diagrams (Cont'd)

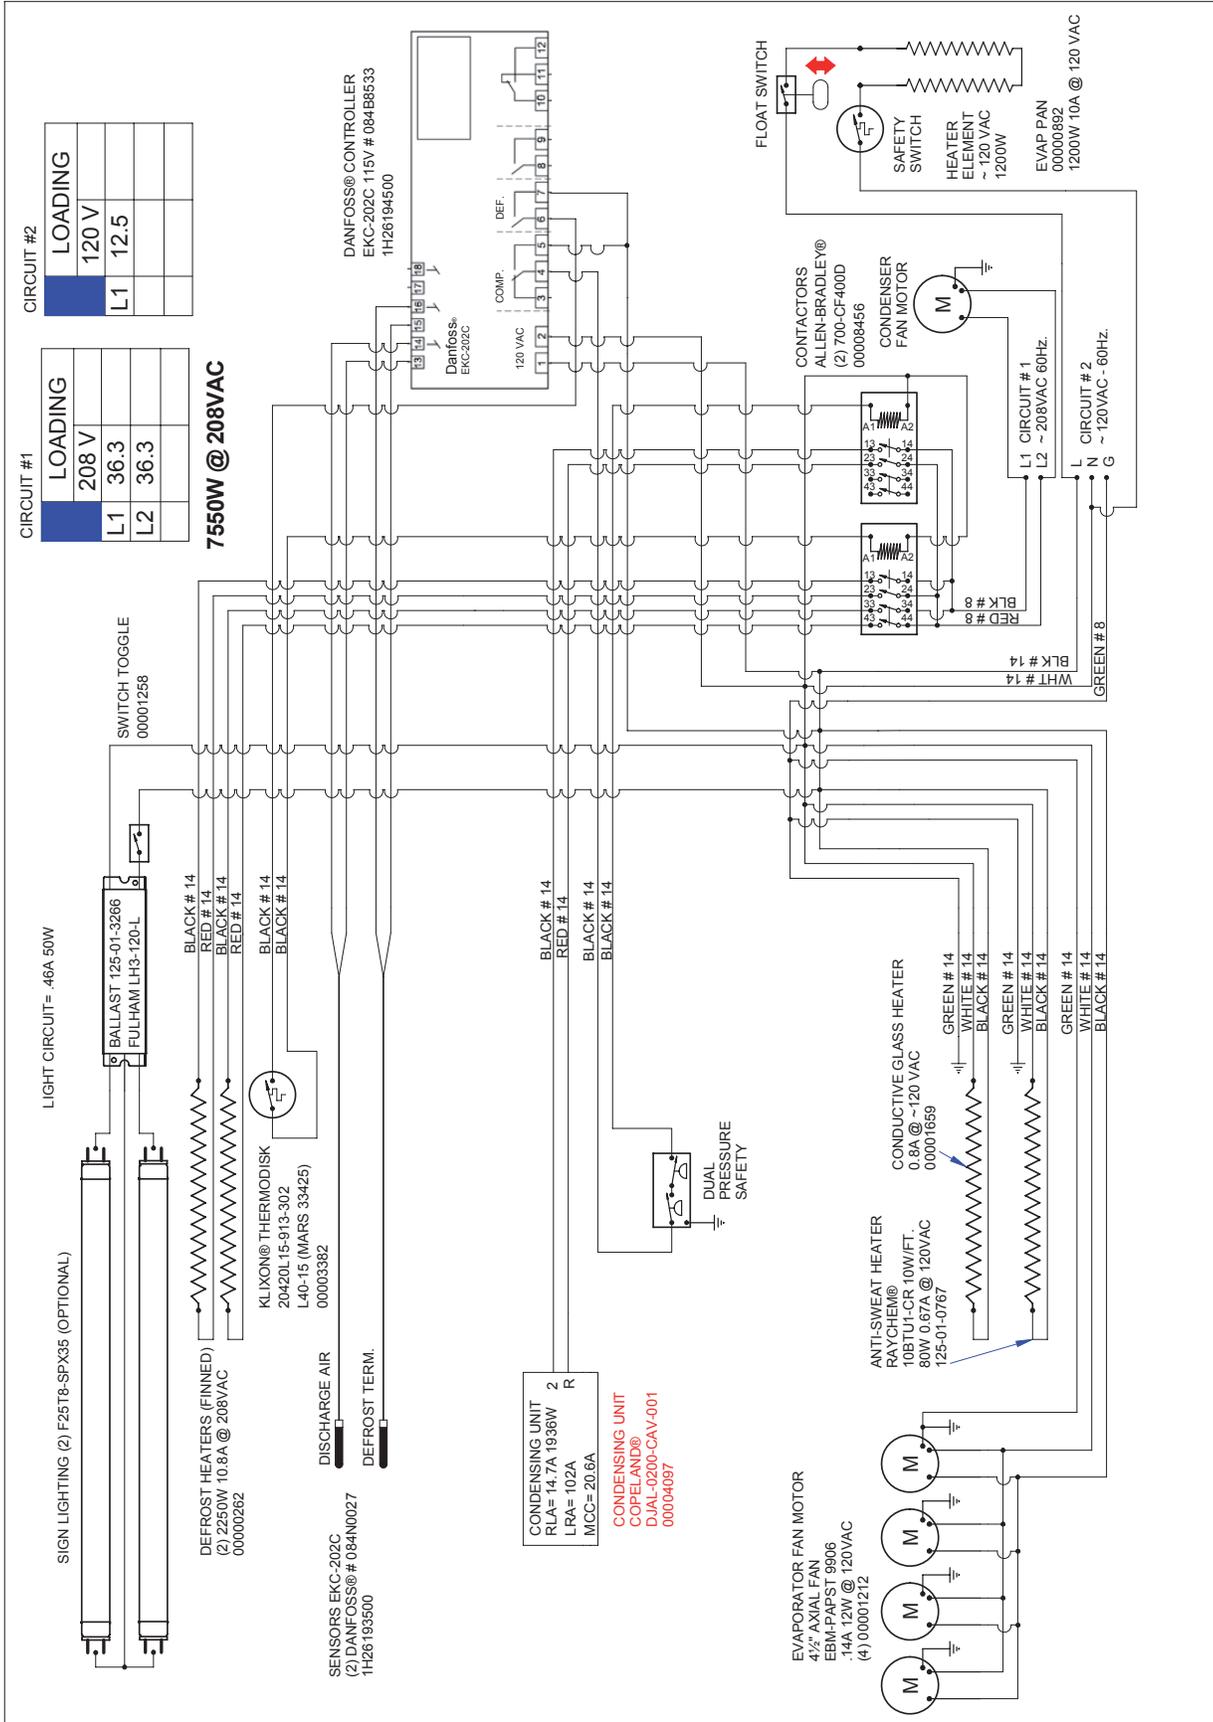


CIRCUIT #1		CIRCUIT #2	
LOADING	LOADING	LOADING	LOADING
L1 36.3	L1 12.5	L1 12.5	L1 12.5
L2 36.3			
7550W @ 208VAC			
PROJECT TITLE: SCSS-L CASES DRAWING #: W8100009 DRAWN BY: ADRIAN E. CRISCI CHECKED BY: AEC DATE: 10/18/01 DATE: 11/21/08 BY: JR PRODUCTION ORDER #: 7/20/09 JR FILE LOCATION: 7/29/09 JR # DESCRIPTION: D Remove branch circuit fuses E Place condenser fan before contactor F Replaced EKC201 control with EKC202C HUSMANN Hussmann Corporation, Int. 13770 Ramona Avenue Chino, CA 91710 (909) 596-4910 Lic# 644406			
DRAWING TITLE: 8' CASE - ELECTRIC DEFROST SELF CONTAINED			
PAGE 1 OF 1			

Wiring Diagrams (Cont'd)

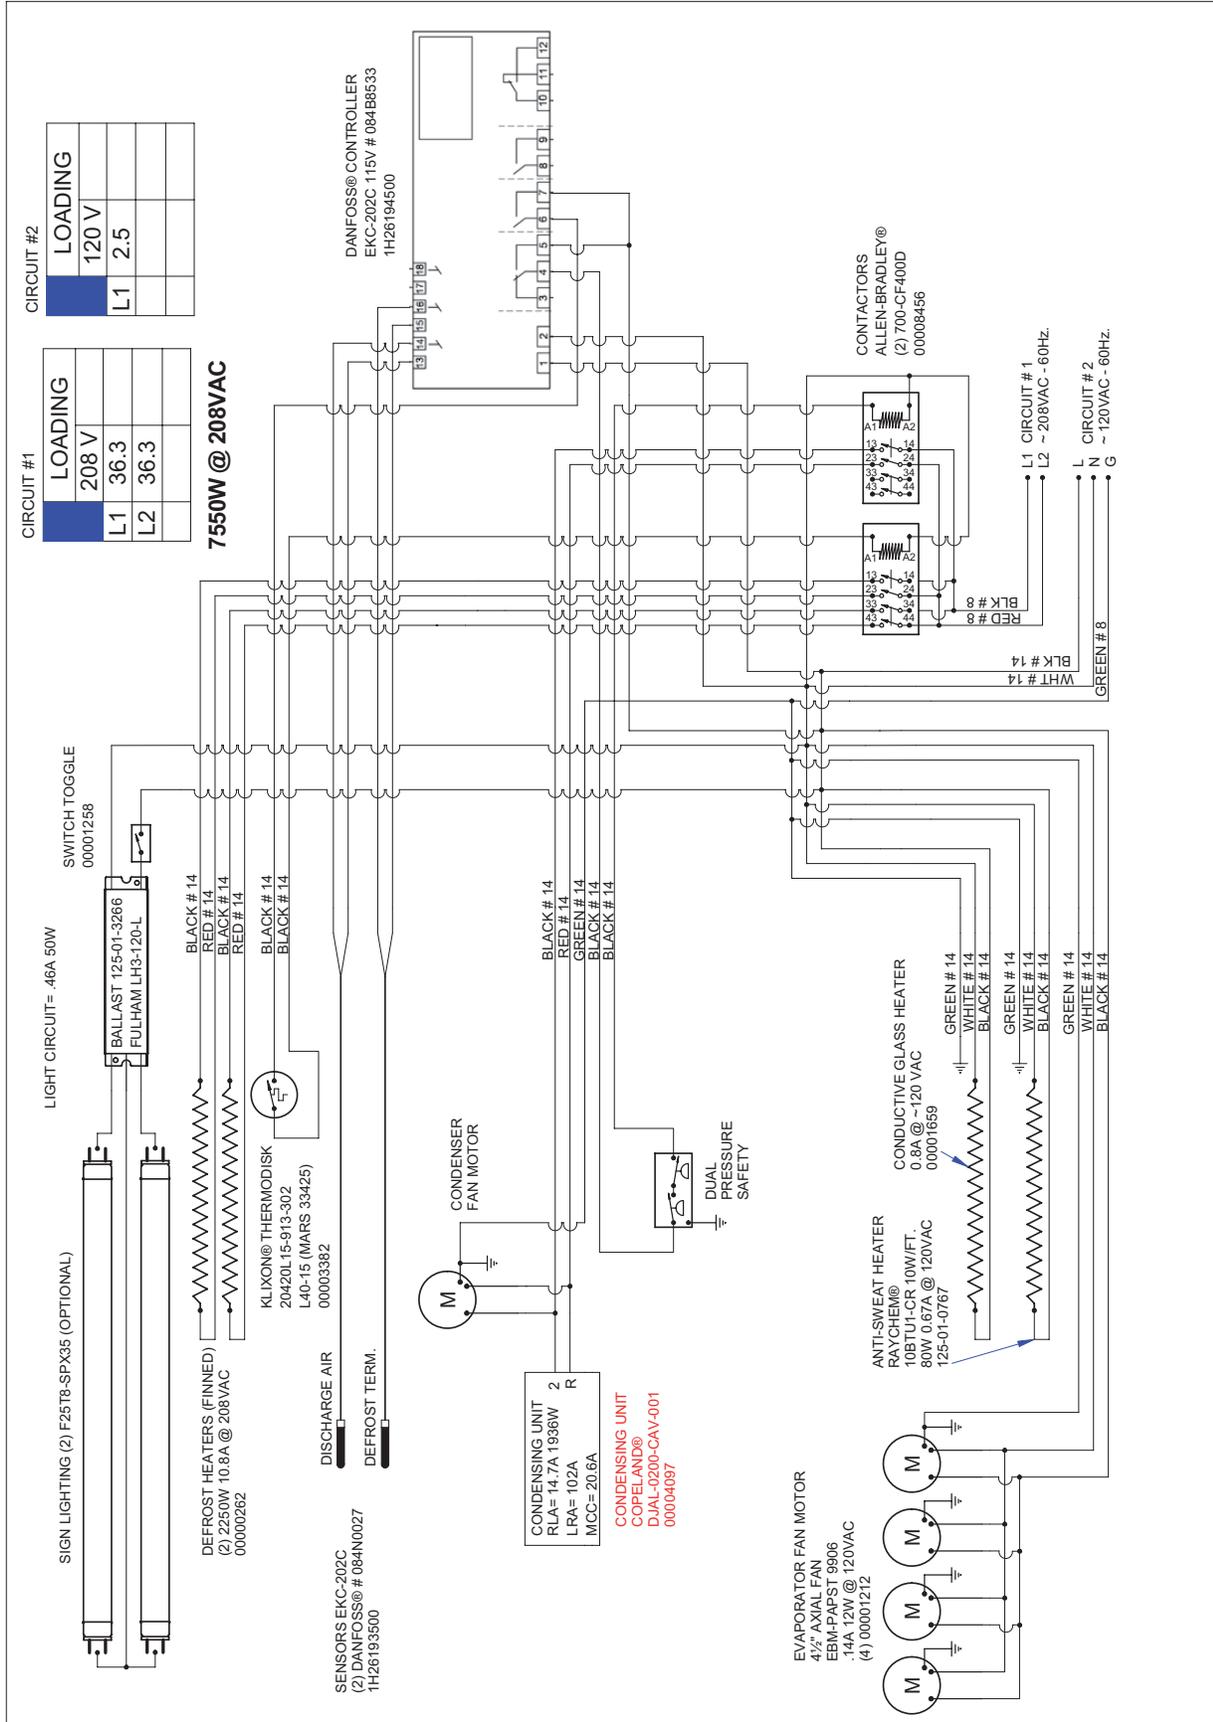


PROJECT TITLE: SCSS-L CASES		DRAWING #: 1H15781	
DRAWN BY: JESSE RIOS		DATE: 10/1/08	
CHECKED BY: JR		PRODUCTION ORDER #: 621670	
DATE: 10/31/08		FILE LOCATION: JR	
DESCRIPTION: C Relocated light circuit fuse		8/17/09 JR	
D Removed branch circuit fuses			
E Replaced EKC201 with EKC202C			
REVISIONS:		DRAWING TITLE: 8' CASE - ELECTRIC DEFROST	
Hussmann Corporation, Inc. 13770 Cass Avenue Cedar Rapids, IA 52404 (800) 590-4810 Lic.# 644406		SELF CONTAINED	

Wiring Diagrams (Cont'd)

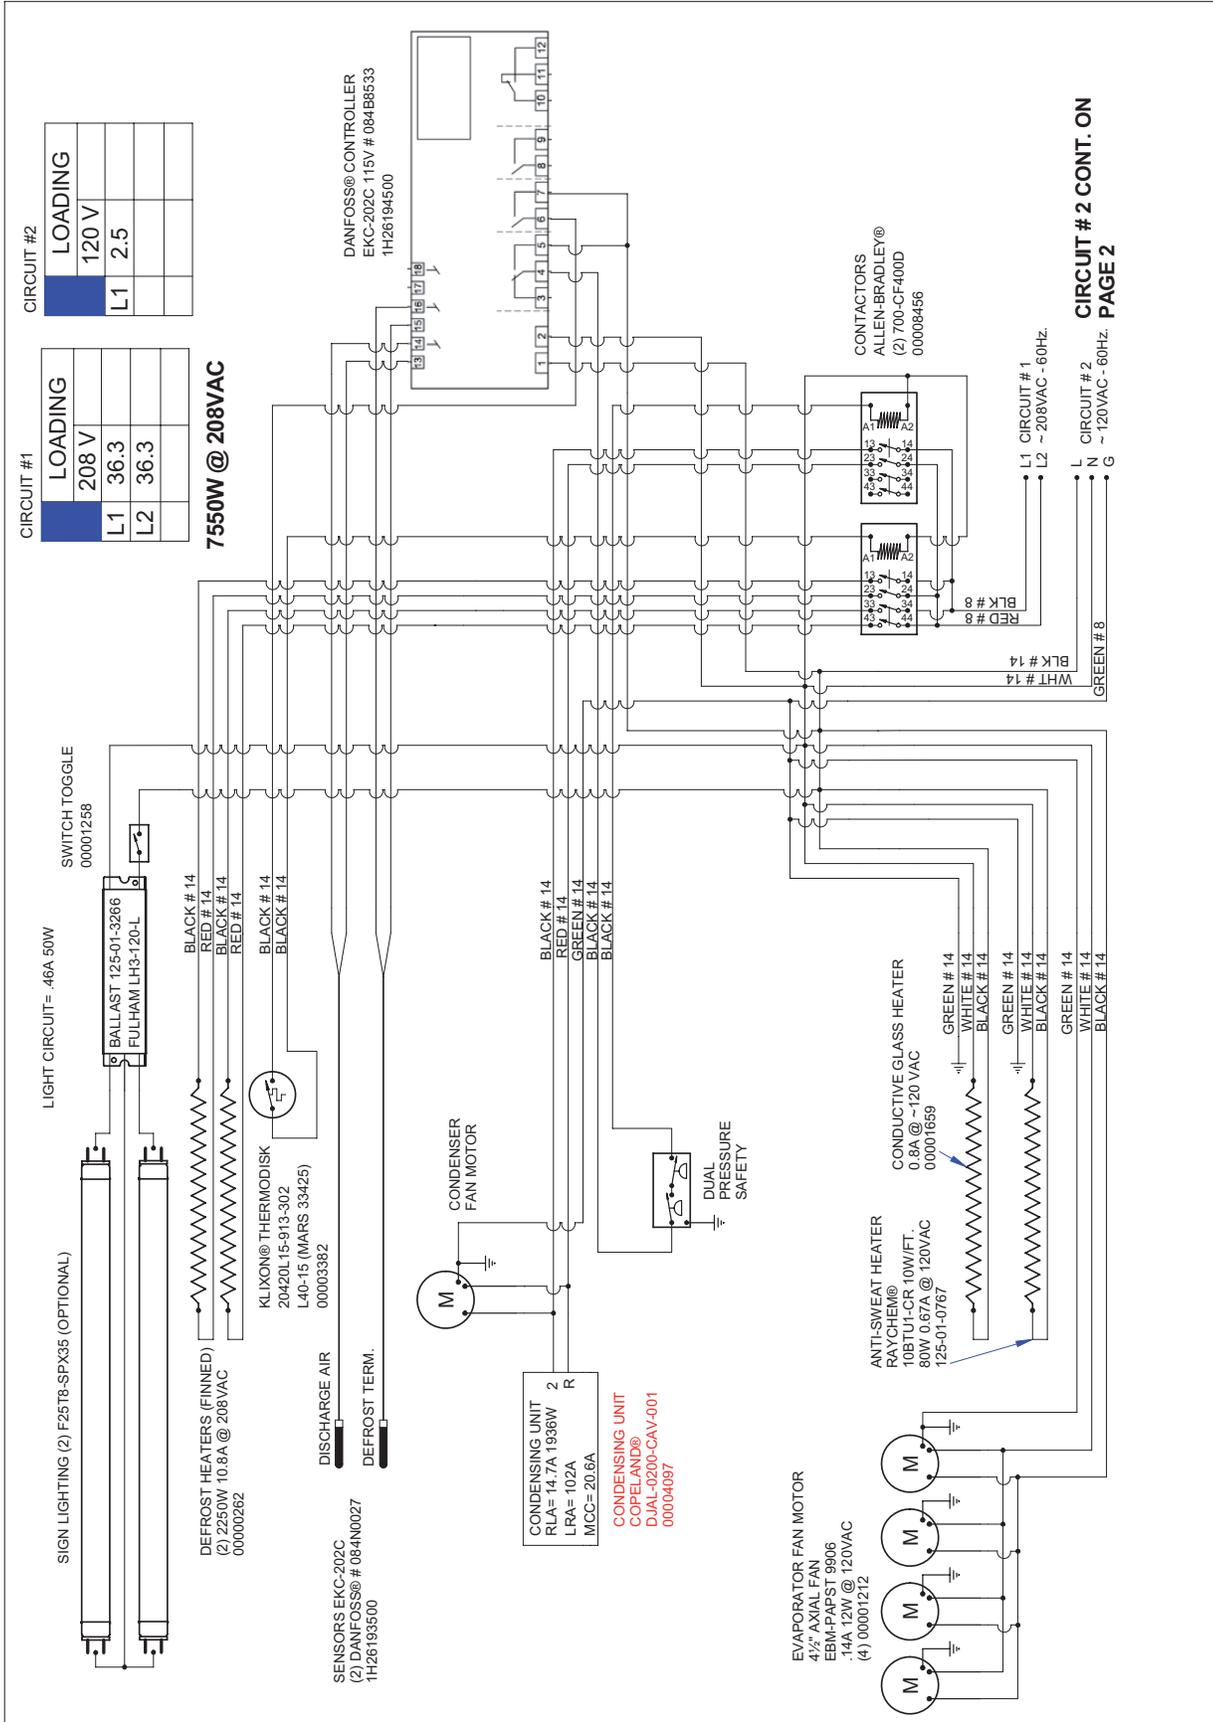

REVISIONS: # 1 DESCRIPTION: Replaced EKC201 with EKC202C # 2		DRAWN BY: JESSE RIOS CHECKED BY: JR DATE: 8/17/09 PRODUCTION ORDER #: 521861 FILE LOCATION:	PROJECT TITLE: SCSS-L CASES DRAWING #: 1H23783
HUSMANN Hussmann Corporation, Inc. 13770 Wilshire Avenue Culver City, CA 91410 (800) 590-4810 Lic.# 644406		DRAWING TITLE: 8' CASE - ELECTRIC DEFROST SELF CONTAINED PAGE 1 OF 2	

Wiring Diagrams (Cont'd)

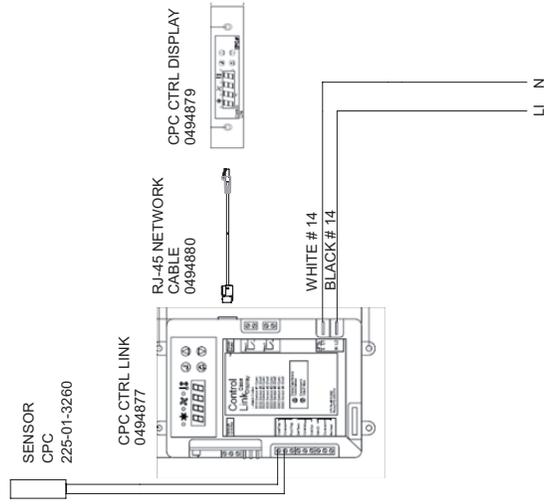


CONTINUED FROM
PAGE 1

REVISIONS: # : DESCRIPTION: B Replaced EKC201 with EKC202C		DRAWN BY: JESSE RIOS CHECKED BY: JR DATE: 8/17/09 PRODUCTION ORDER #: 521861 FILE LOCATION:	PROJECT TITLE: SCSS-L CASES DRAWING TITLE: 8' CASE - ELECTRIC DEFROST SELF CONTAINED	DRAWING #: 1H23783 PAGE 2 OF 2
---	--	---	--	-----------------------------------

HUSSMANN
 Hussmann Corporation, Inc.
 11700 W. Alameda Avenue
 Chino, CA 91710
 (909) 590-4810 Lic.# 644106

Wiring Diagrams (Cont'd)

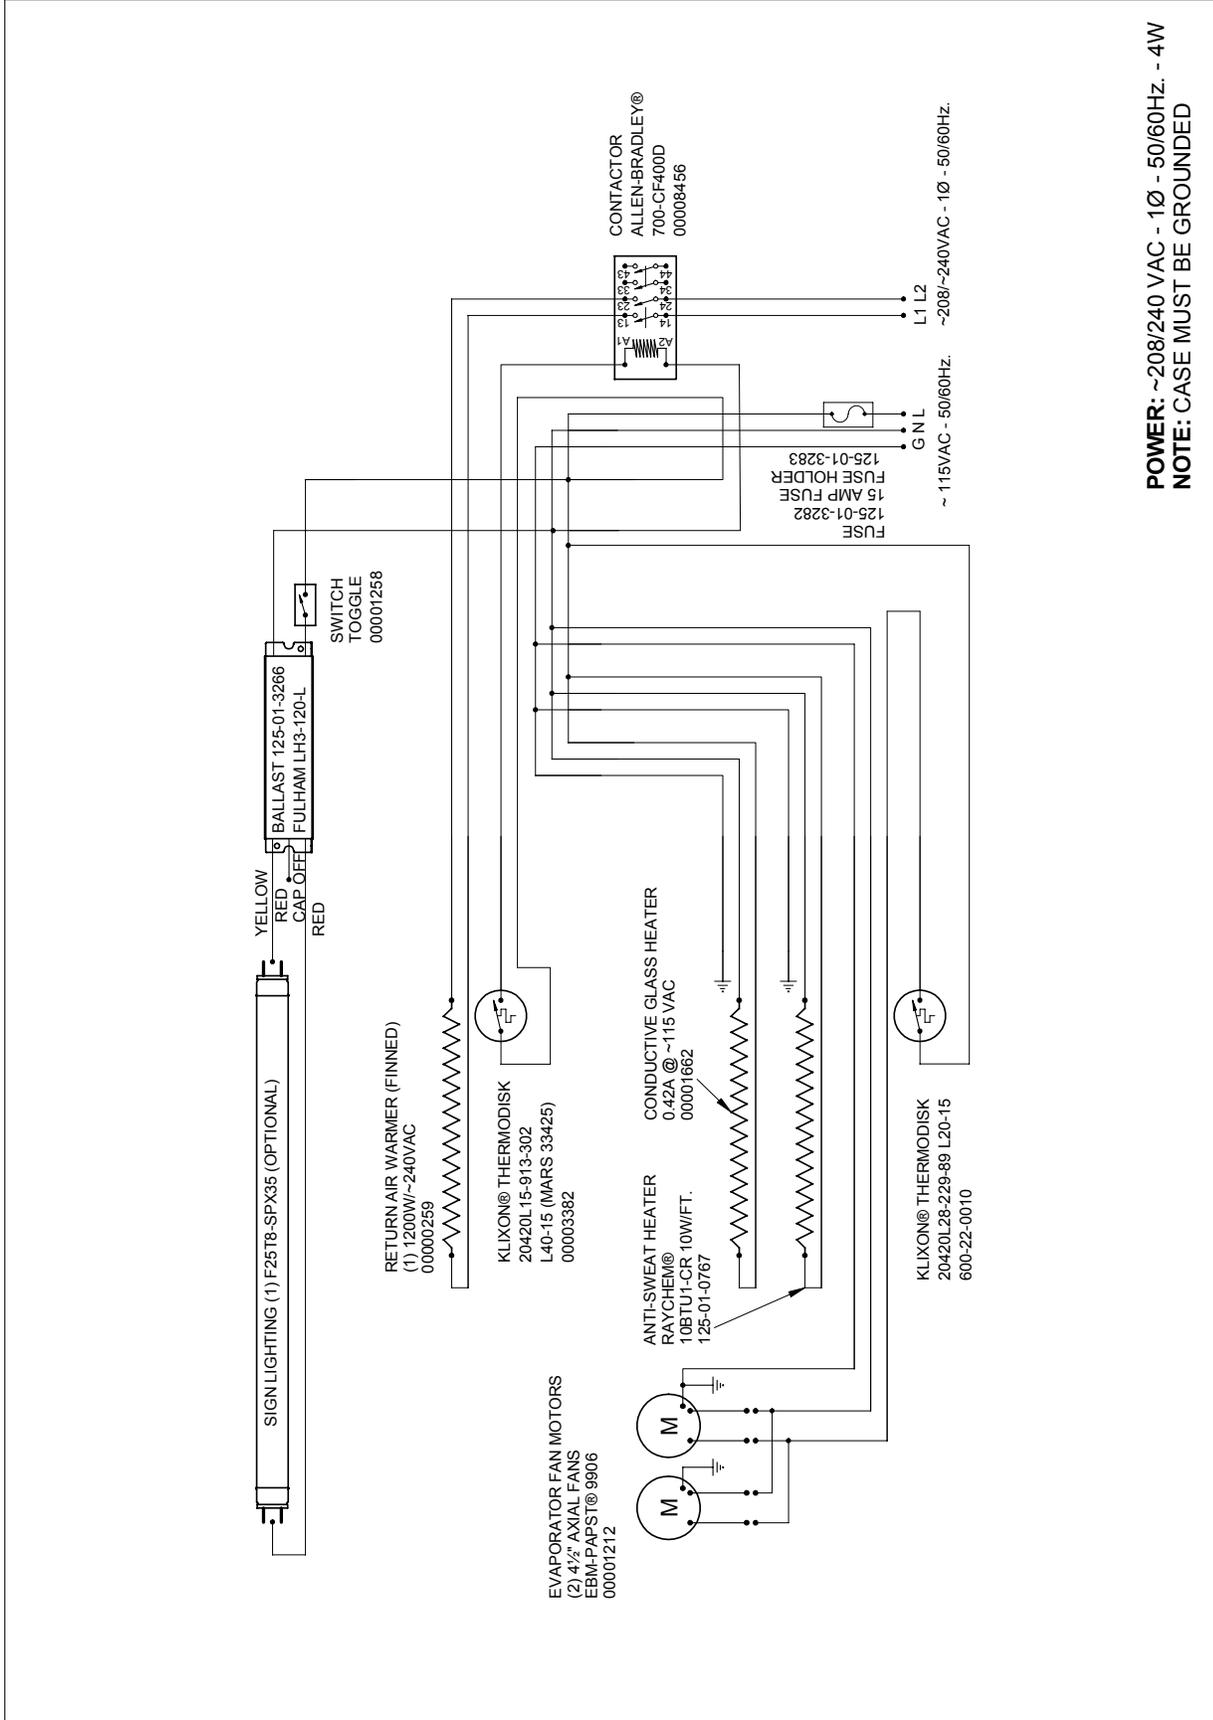


POWER: ~208/240 VAC - 1Ø - 50/60Hz. - 4W
NOTE: CASE MUST BE GROUNDED

REVISIONS: # 1 MODIFIED CONNECTOR ON THERMODISK # 2 DELETED TERMINAL BLOCKS&CONNECTORS # 3		DRAWN BY: ADRIAN E. CRISCI CHECKED BY: AEC DATE: 02/06/02 AEC D.O. 04/05/05	PROJECT TITLE: SCSS-L CASES DRAWING TITLE: 4' CASE - KOOLGAS™ DEFFROST	DRAWING #: W8100012 PAGE 1 OF 1
--	--	---	---	------------------------------------

HUBMANN
 Hussmann Corporation, Int.
 13770 Ramona Avenue
 Chino, CA 91710
 (909) 594-4910 Lic# 844406

Wiring Diagrams (Cont'd)

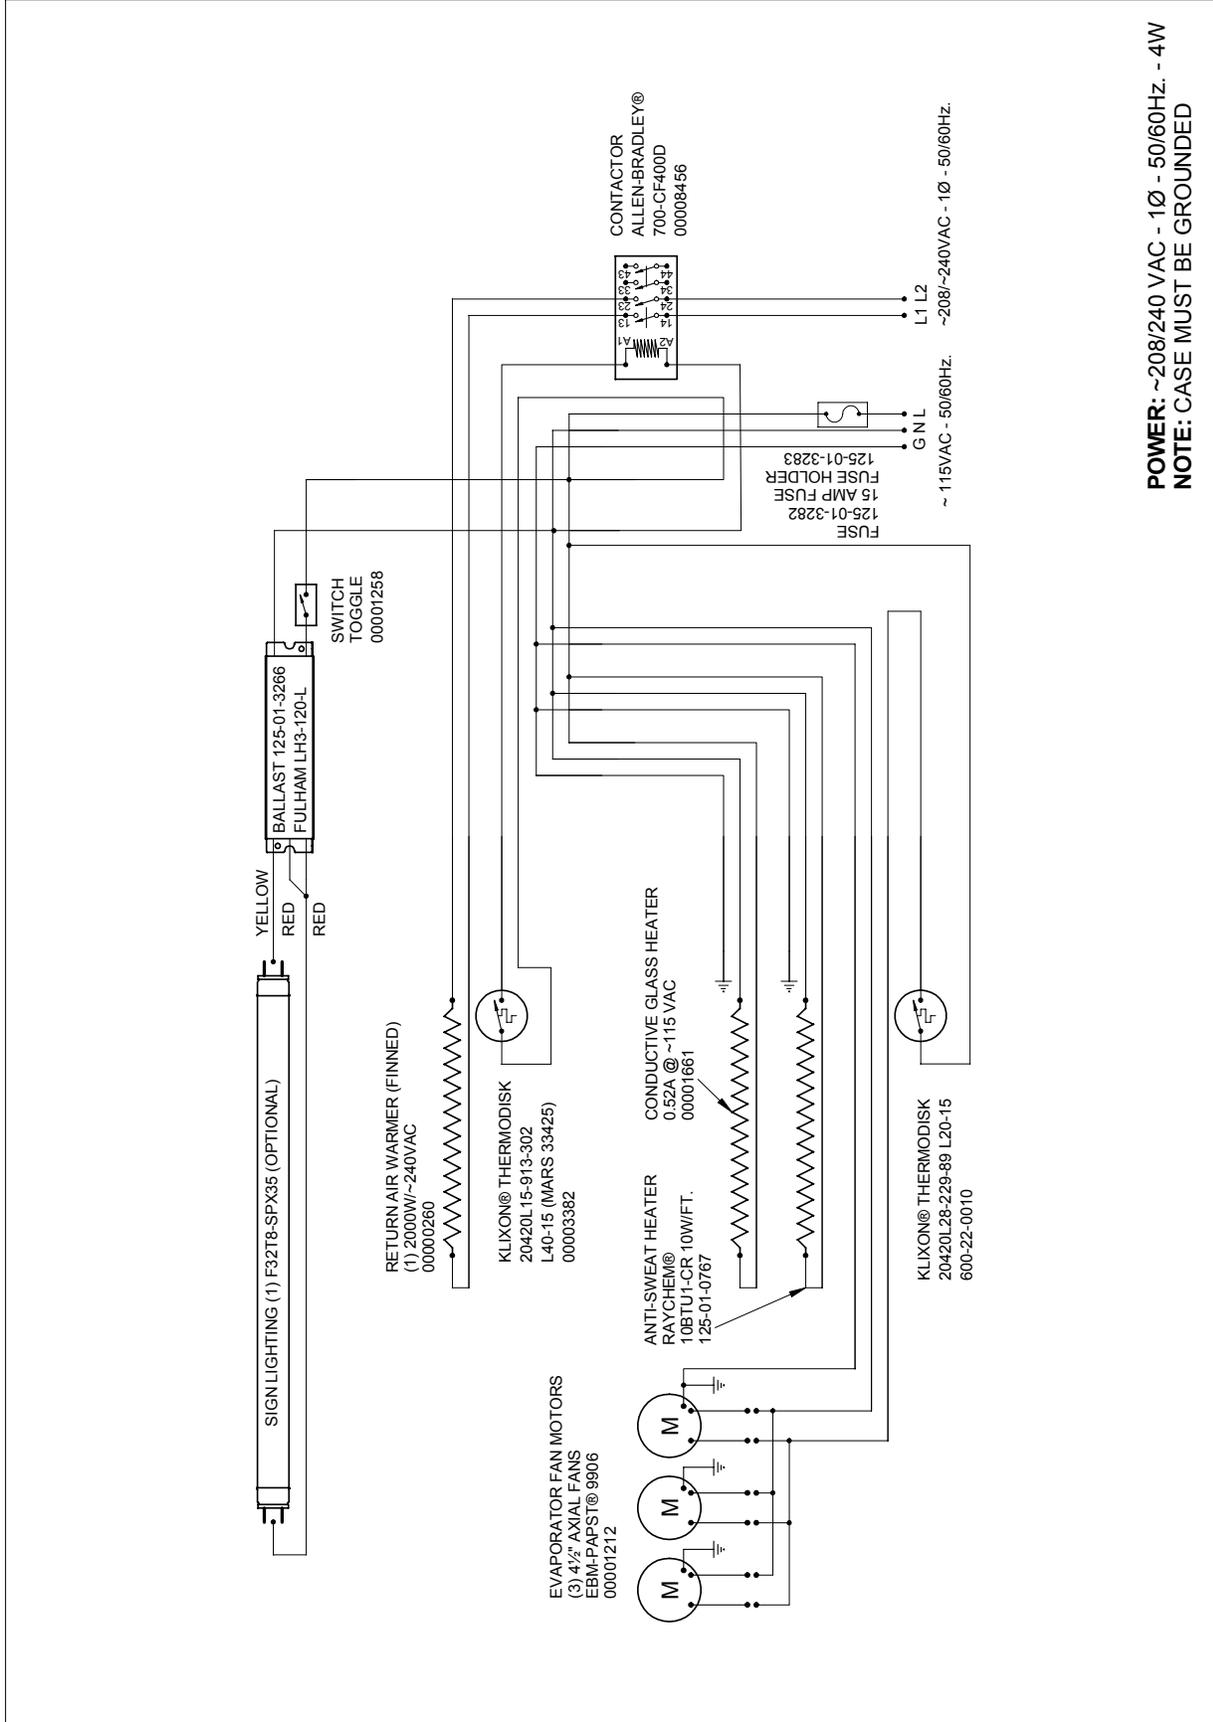


POWER: ~208/240 VAC - 1Ø - 50/60Hz. - 4W
NOTE: CASE MUST BE GROUNDED

PROJECT TITLE: SCSS-L CASES		DRAWING #: W8100013	
DRAWING TITLE: 5' CASE - KOOLGAS™ DEFFROST		DRAWING ORDER #:	
DRAWN BY: ADRIAN E. CRISCI	CHECKED BY: AEC	DATE: 10/19/01	FILE LOCATION: H:\WIRESCHMATIC\NEW-WIRING
#	DESCRIPTION:	DATE:	D.O.
1	MODIFIED CONNECTOR ON THERMODISK	02/06/02	AEC
2	DELETED TERMINAL BLOCKS&CONNECTORS	04/05/05	D.O.
3			


HUSMANN
 Husmann Corporation, Int.
 13770 Ramona Avenue
 Chino, CA 91710
 (909) 594-4910 Lic# 644405

Wiring Diagrams (Cont'd)

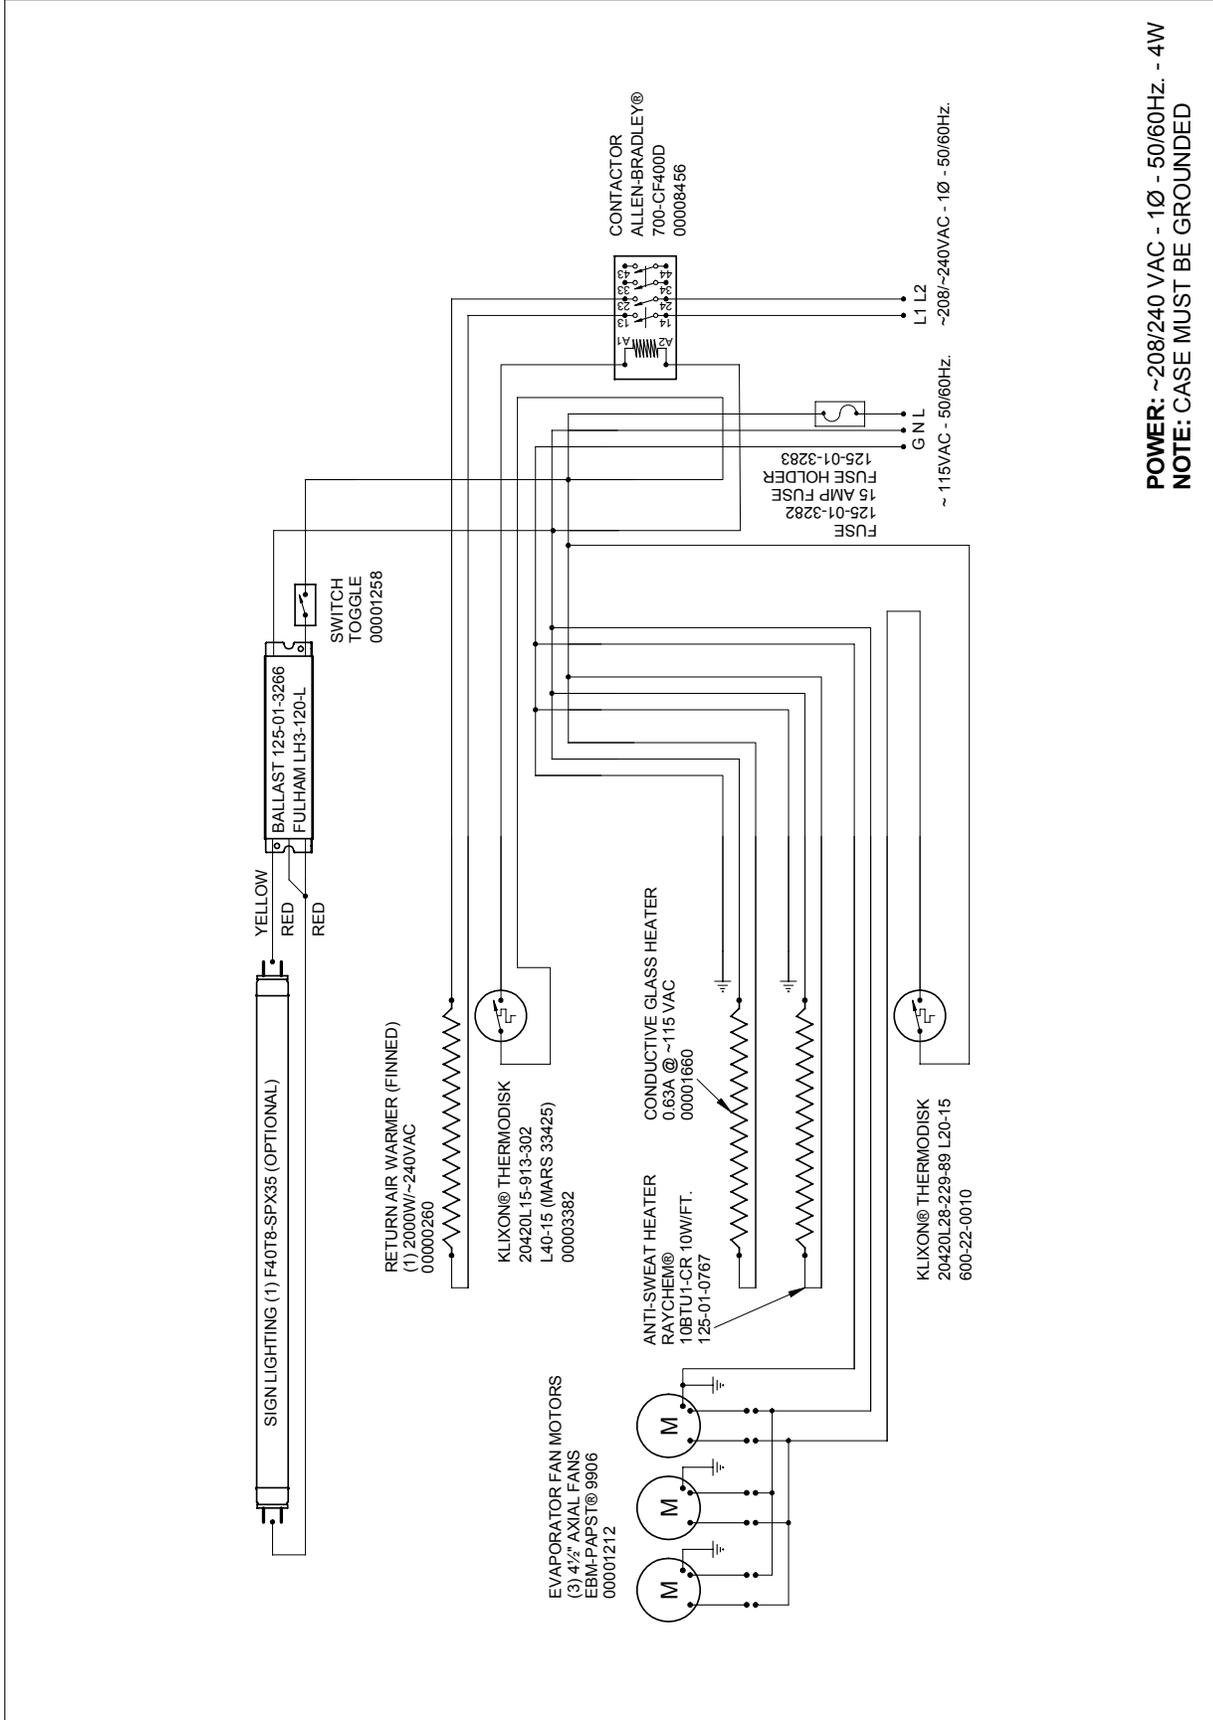


REVISIONS: # 1 DESCRIPTION: MODIFIED CONNECTOR ON THERMODISK # 2 REMOVED TERMINAL BLOCKS&CONNECTORS # 3		DRAWN BY: ADRIAN E. CRISCI CHECKED BY: AEC DATE: 02/06/02 AEC PRODUCTION ORDER #: 04/05/05 D.Q. FILE LOCATION: H:\WIRESCHMATIC\NEW-WIRING	PROJECT TITLE: SCSS-L CASES DRAWING TITLE: 6' CASE - KOOLGAS™ DEFFROST	DRAWING #: W8100014 PAGE 1 OF 1
---	--	---	---	------------------------------------

Wiring Diagrams (Cont'd)

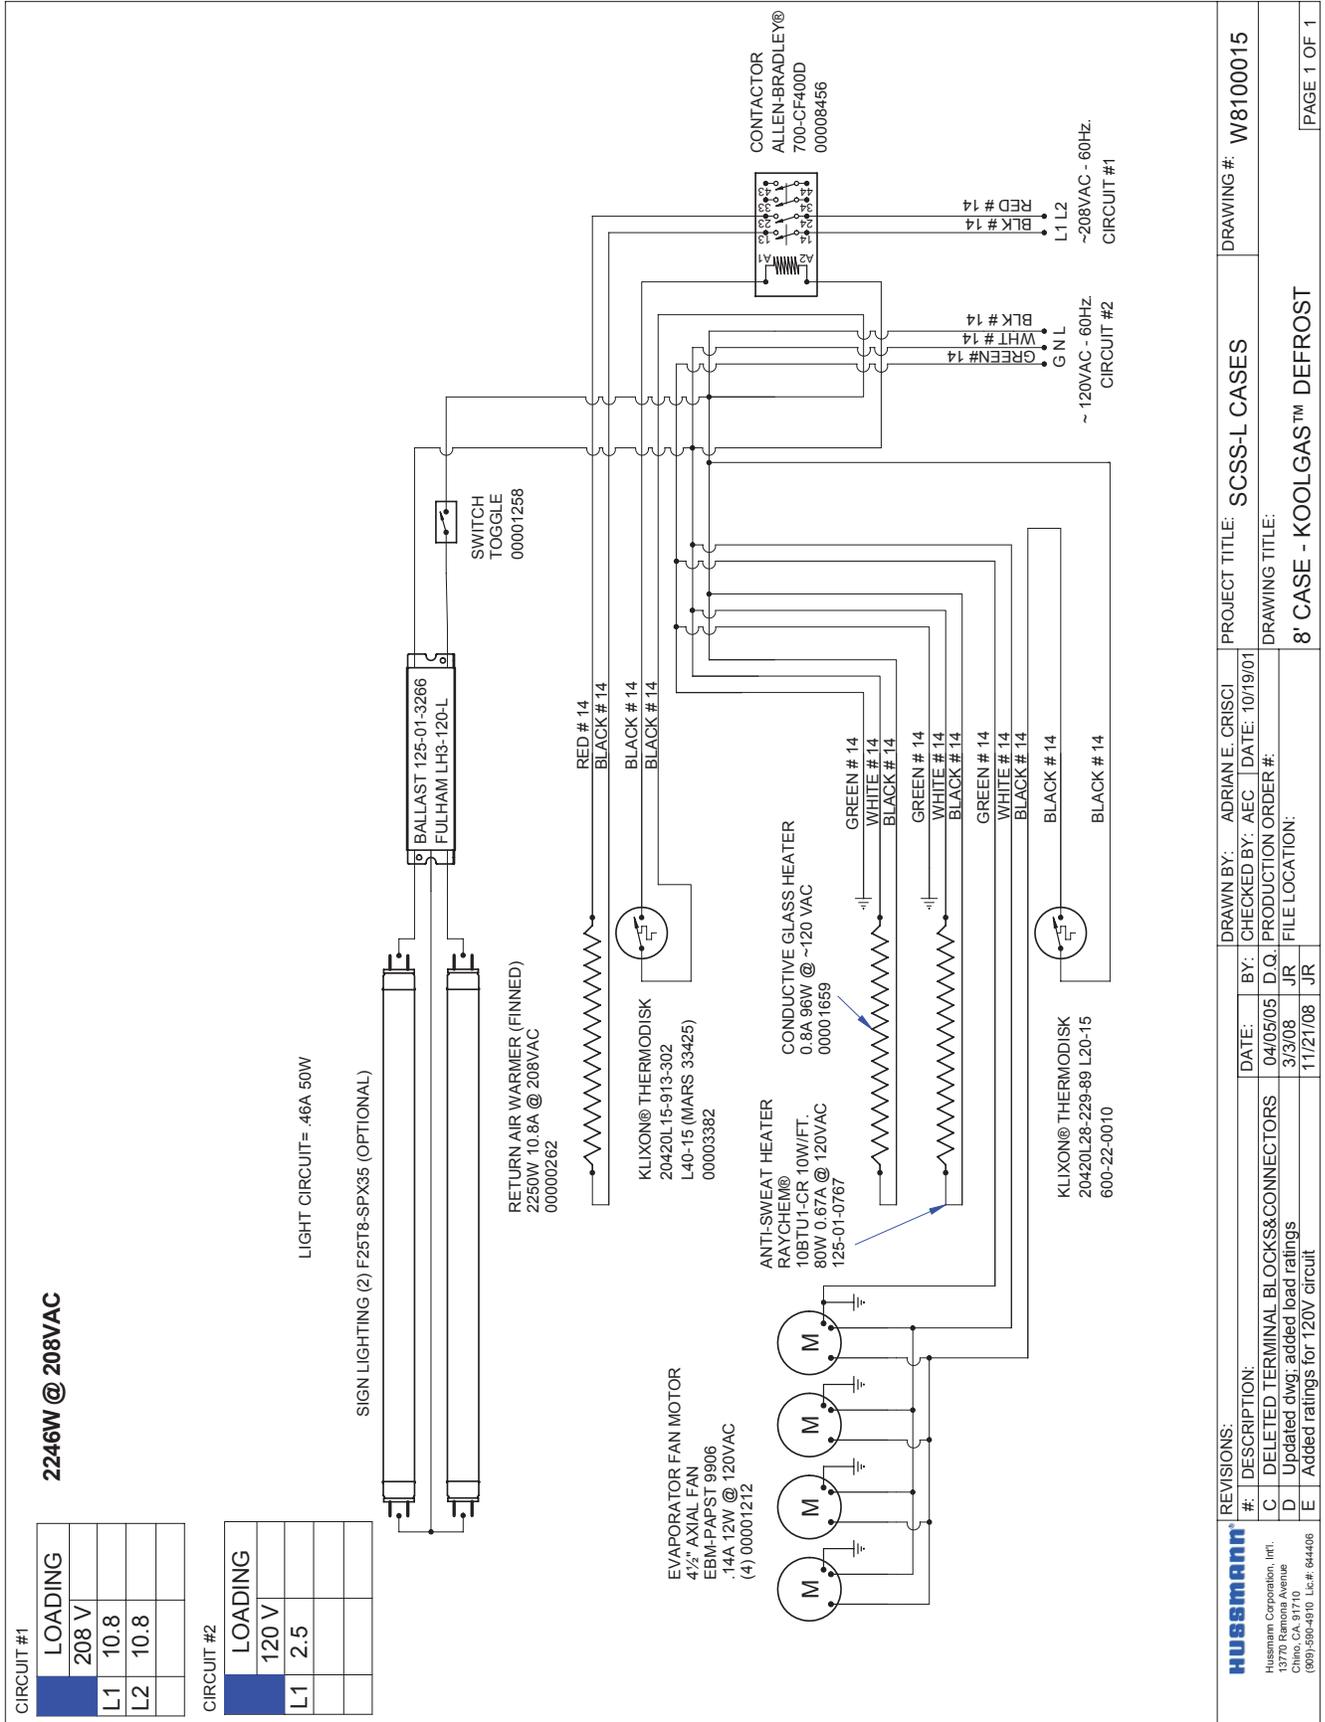


DRAWING #1		PROJECT TITLE: SCSS-L CASES		DRAWING #: W8100015	
DRAWING #2		DRAWING TITLE: 8' CASE - KOOLGAS™ DEFFROST		PAGE 1 OF 1	
REVISIONS:	#	DESCRIPTION:	DATE:	BY:	CHECKED BY:
	C	DELETED TERMINAL BLOCKS&CONNECTORS	04/05/05	JR	ADRIAN E. CRISCI
	D	Updated dwg; added load ratings	3/3/08	JR	AEC
	E	Added ratings for 120V circuit	11/21/08	JR	AEC
		FILE LOCATION:	DATE: 10/19/01		
		PRODUCTION ORDER #:	DATE: 10/19/01		

Wiring Diagrams (Cont'd)

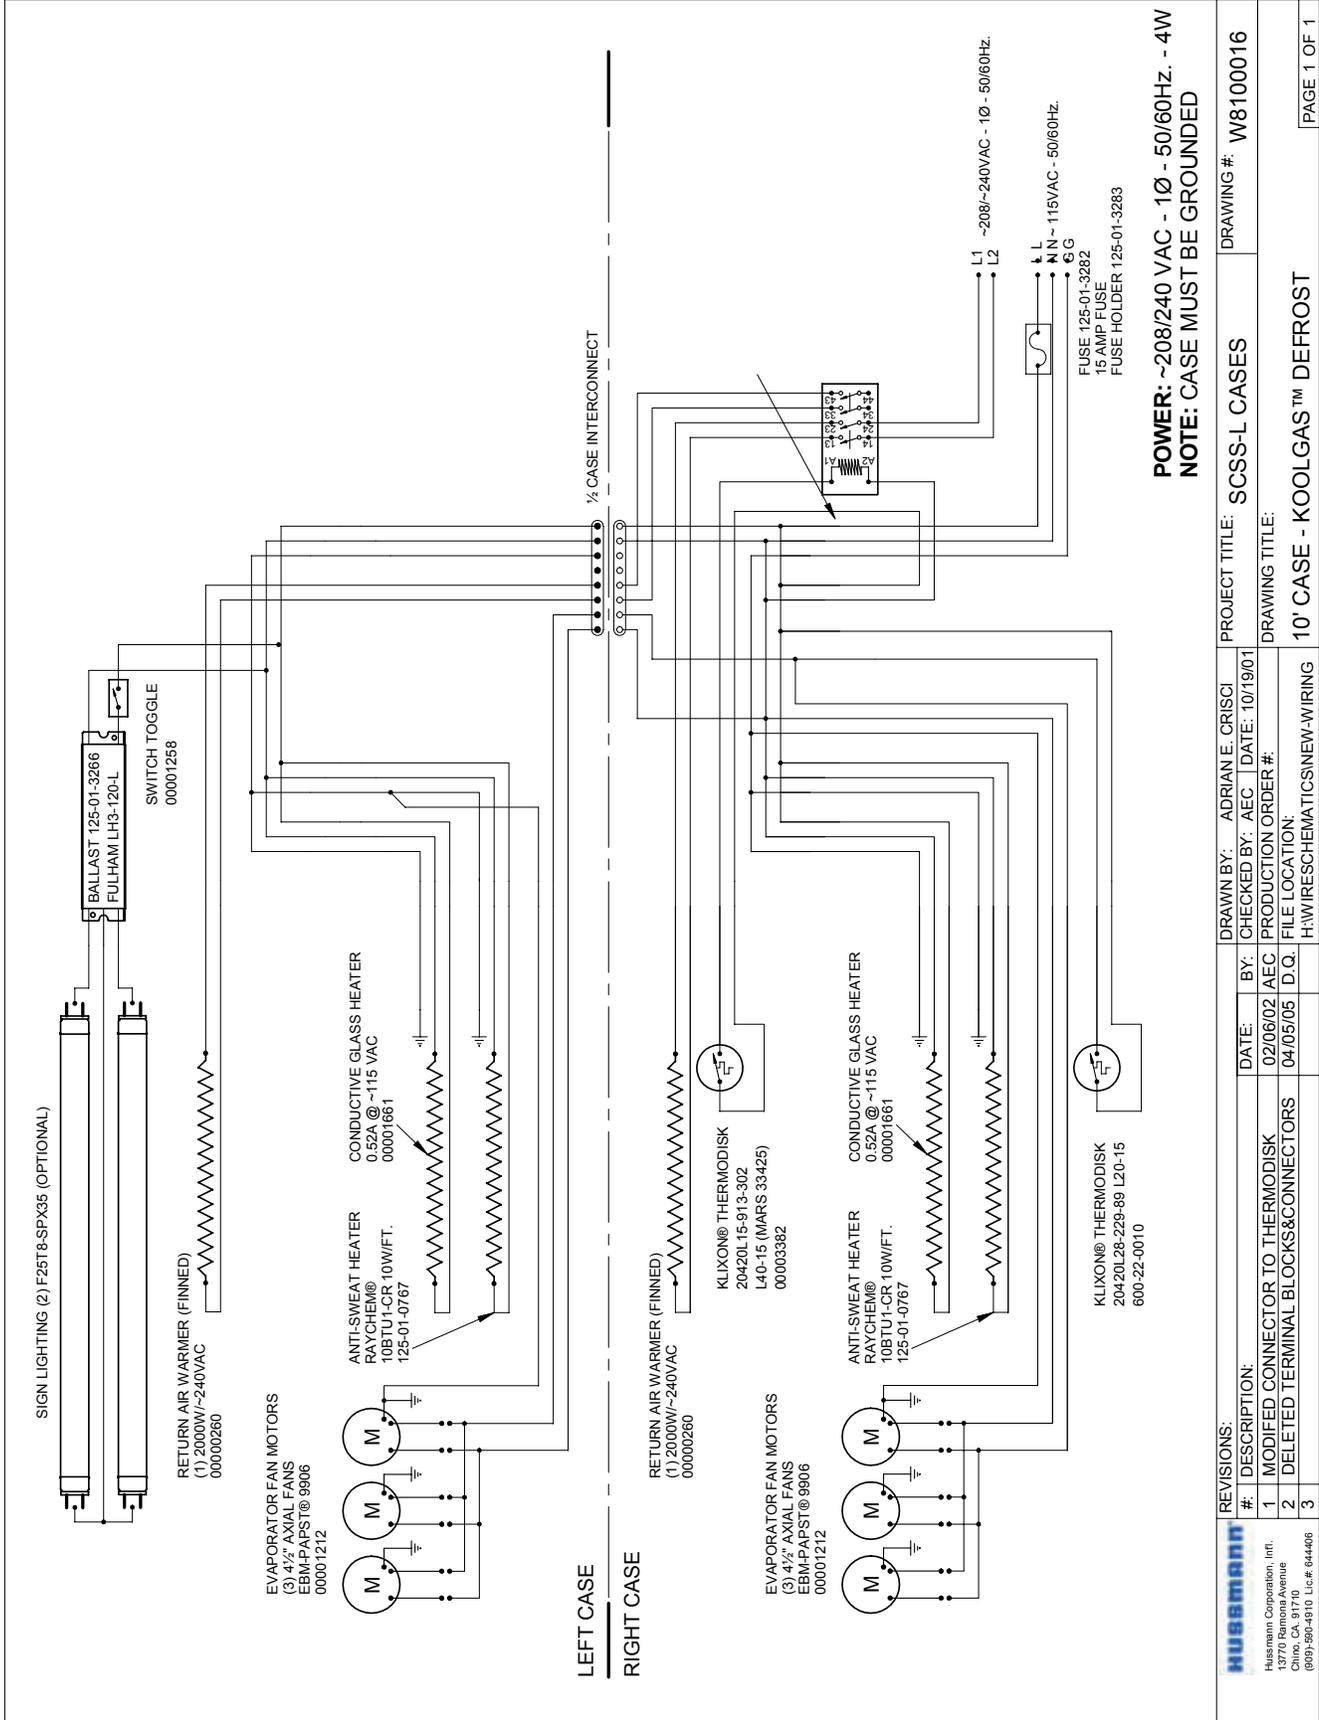

Wiring Diagrams (Cont'd)

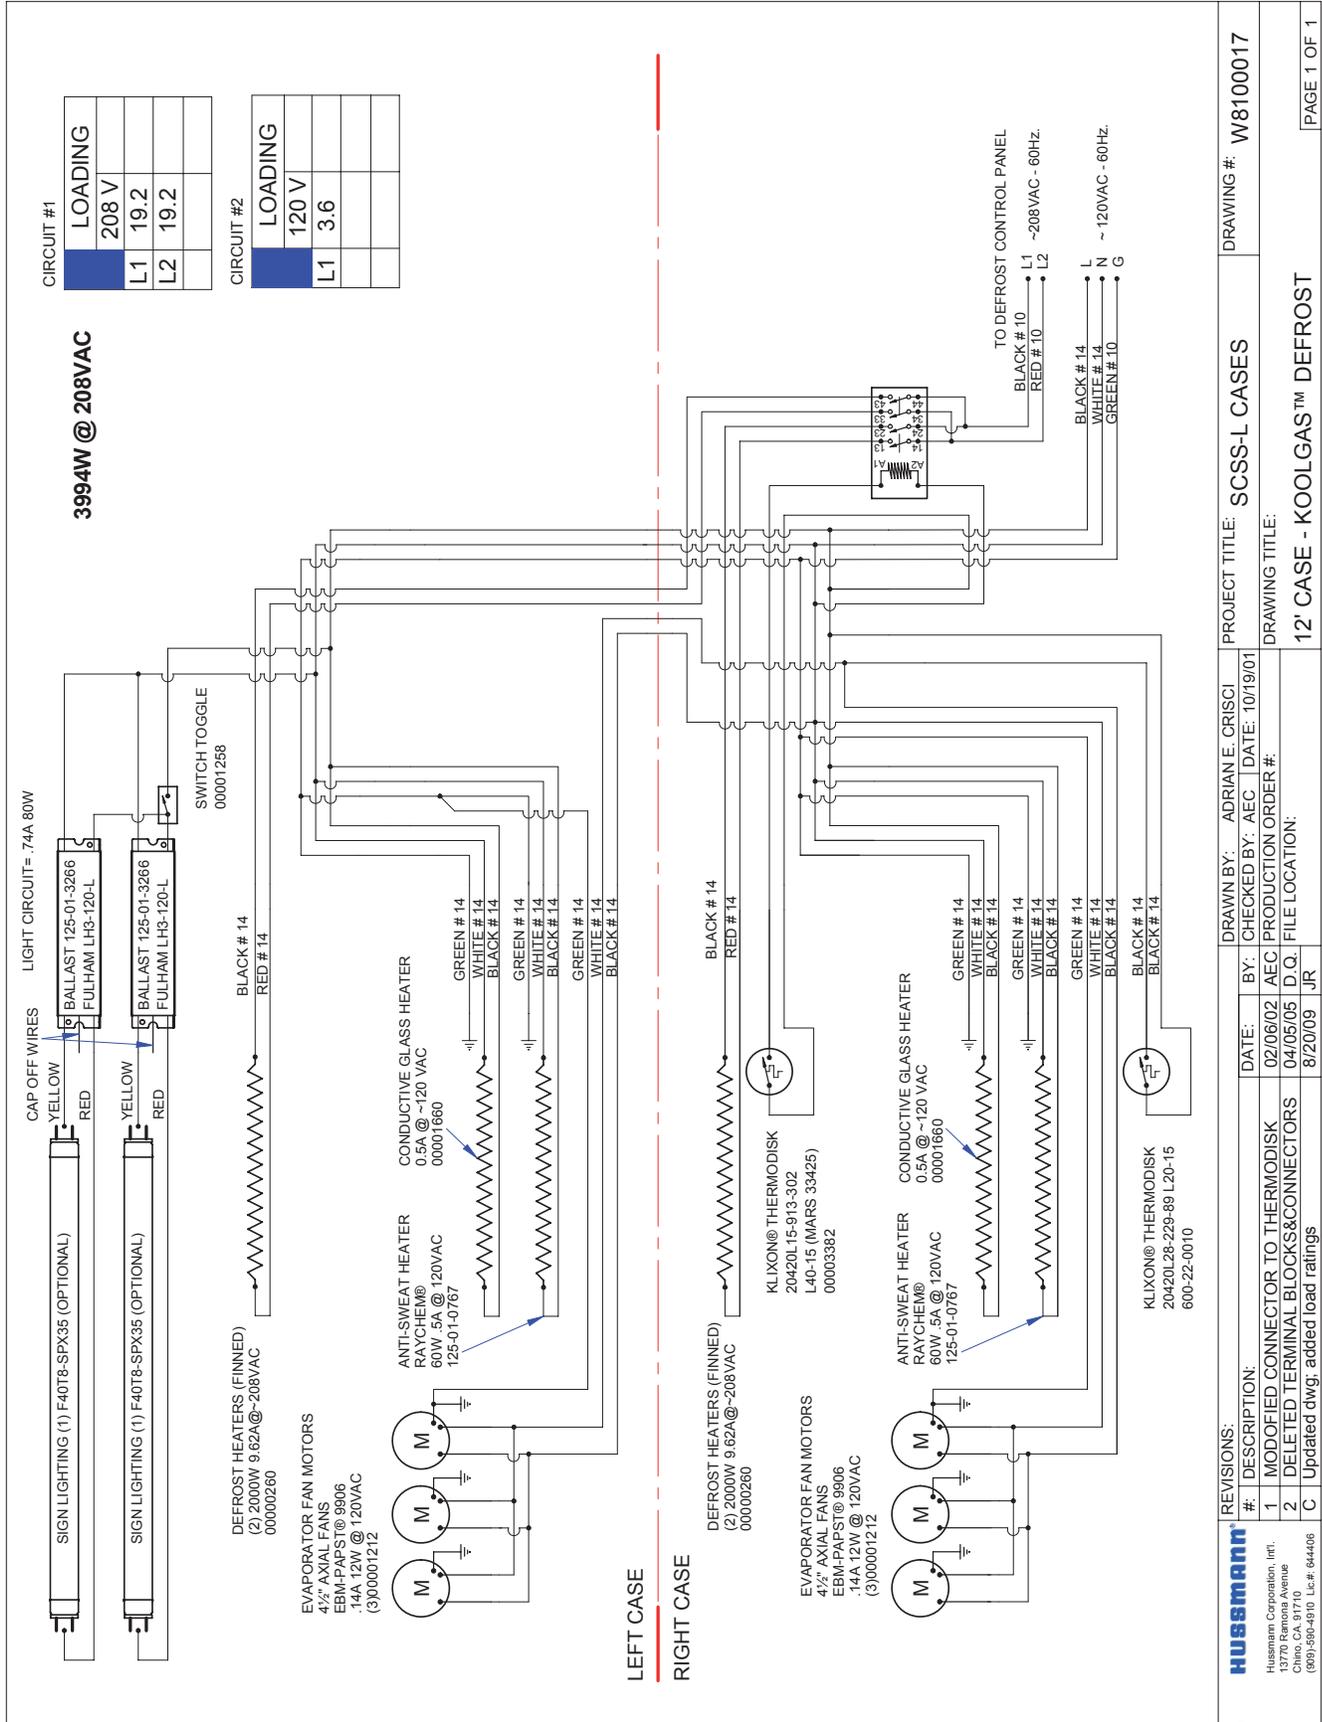

REVISIONS:		DRAWN BY: ADRIAN E. CRISCI	PROJECT TITLE: SCSS-L CASES	DRAWING #: W8100017
#	DESCRIPTION:	DATE:	BY: CHECKED BY: AEC	DATE: 10/19/01
1	MODIFIED CONNECTOR TO THERMODISK	02/06/02	AEC	PRODUCTION ORDER #:
2	DELETED TERMINAL BLOCKS&CONNECTORS	04/05/05	D.Q.	FILE LOCATION:
C	Updated dwg. added load ratings	8/20/09	JR	

HUSMANN
Husmann Corporation, Int.
13770 Ramona Avenue
Chino, CA 91710
(909) 590-4910 Lic.# 644406

12' CASE - KOOLGAS™ DEFROST


PAGE 1 OF 1

Appendices

Appendix A. - Temperature Guidelines - Refrigerated

The refrigerators should be operated according to the manufacturer's published engineering specifications for entering air temperatures for specific equipment applications. Table 1 shows the typical temperature of the air entering the food zone one hour before the start of defrost and one hour after defrost for various categories of refrigerators. Refer to Appendix C for Field Evaluation Guidelines.

Type of Refrigerator	Typical Entering Air Temperature
I. OPEN DISPLAY	
A. Non frozen:	
1) Meat	28°F
2) Dairy/Deli	32°F
3) Produce	
a. Processed	36°F
b. Unprocessed	45°F
B. Frozen	0°F
C. Ice Cream	-5°F
II. CLOSED DISPLAY	
A. Non frozen:	
1) Meat	34°F
2) Dairy/Deli	34°F
3) Produce	
a. Processed	36°F
b. Unprocessed	45°F
B. Frozen	0°F
C. Ice Cream	-5°F

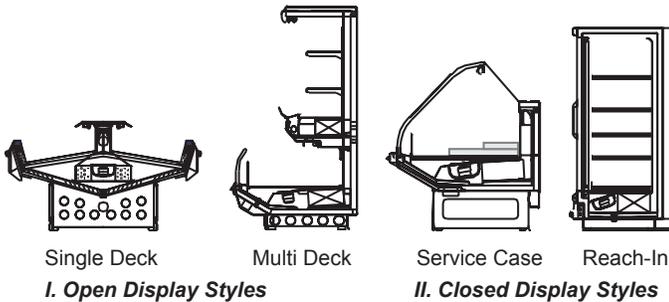

Appendix B. - Application Recommendations - Refrigerated

- 1.0 Temperature performance is critical for controlling bacteria growth. Therefore, the following recommendations are included in the standard. They are based on confirmed field experience over many years.
- 1.1 The installer is responsible for following the installation instructions and recommendations provided by Hussmann for the installation of each individual type refrigerator.
- 1.2 Refrigeration piping should be sized according to the equipment manufacturer's recommendations and installed in accordance with normal refrigeration practices. Refrigeration piping should be insulated according to Hussmann's recommendations.

- 1.3 A clogged waste outlet blocks refrigeration. The installer is responsible for the proper installation of the system which dispenses condensate waste through an air gap into the building indirect waste system.
- 1.4 The installer should perform a complete start-up evaluation prior to the loading of food into the refrigerator, which includes such items as:
 - a) Initial temperature performance, Coils should be properly fed with a refrigerant according to manufacturer's recommendations.
 - b) Observation of outside influences such as drafts, radiant heating from the ceiling and from lamps. Such influence should be properly corrected or compensated for.
 - c) At the same time, checks should be made of the store dry-bulb and wet-bulb temperatures to ascertain that they are within the limits prescribed by Hussmann.
 - d) Complete start-up procedures should include checking through a defrost to make certain of its adequate frequency and length without substantially exceeding the actual needs. This should include checking the electrical or refrigerant circuits to make sure that defrosts are correctly programmed for all the refrigerators connected to each refrigeration system.
 - e) Recording instruments should be used to check performance.

Appendix C. - Field Recommendations - Refrigerated Recommendations for field evaluating the performance of retail food refrigerators and hot cases

- 1.0 The most consistent indicator of display refrigerator performance is temperature of the air entering the product zone (see Appendix A). In practical use, the precise determination of return air temperature is extremely difficult. Readings of return air temperatures will be variable and results will be inconsistent. The product temperature alone is not an indicator of refrigerator performance.

NOTE: Public Health will use the temperature of the product in determining if the refrigerator will be allowed to display potentially hazardous food. For the purpose of this evaluation, product temperature above the FDA Food Code 1993 temperature for potentially hazardous food will be the first indication that an evaluation should be performed. It is expected that all refrigerators will keep food at the FDA Food Code 1993 temperature for potentially hazardous food.

Appendices (Cont'd)

- 1.1 The following recommendations are made for the purpose of arriving at easily taken and understood data which, coupled with other observations, may be used to determine whether a display refrigerator is working as intended:
- a) **INSTRUMENT** - A stainless steel stem-type thermometer is recommended and it should have a dial a minimum of 1 inch internal diameter. A test thermometer scaled only in Celsius or dually scaled in Celsius and Fahrenheit shall be accurate to 1°C (1.8°F). Temperature measuring devices that are scaled only in Fahrenheit shall be accurate to 2°F. The thermometer should be checked for proper calibration. (It should read 32°F when the stem is immersed in an ice water bath).
 - b) **LOCATION** - The probe or sensing element of the thermometer should be located in the airstream where the air first enters the display or storage area, and not more than 1 inch away from the surface and in the center of the discharge opening.
 - c) **READING** - It should first be determined that the refrigerator is refrigerating and has operated at least one hour since the end of the last defrost period. The thermometer reading should be made only after it has been allowed to stabilize, i.e., maintain a constant reading.
 - d) **OTHER OBSERVATIONS** - Other observations should be made which may indicate operating problems, such as unsatisfactory product, feel/appearance.
 - e) **CONCLUSIONS** - In the absence of any apparent undesirable conditions, the refrigerator should be judged to be operating properly. If it is determined that such condition is undesirable, i.e., the product is above proper temperature, checks should be made for the following:
 1. Has the refrigerator been loaded with warm product?
 2. Is the product loaded beyond the "Safe Load Line" markers?
 3. Are the return air ducts blocked?
 4. Are the entering air ducts blocked?
 5. Is a dumped display causing turbulent air flow and mixing with room air?
 6. Are spotlights or other high intensity lighting directed onto the product?
 7. Are there unusual draft conditions (from heating/air-conditioning ducts, open doors, etc.)?
 8. Is there exposure to direct sunlight?
 9. Are display signs blocking or diverting airflow?
 10. Are the coils of the refrigerator iced up?
 11. Is the store ambient over 75°F, 55% RH as set forth in ASHRAE Standard 72 and ASHRAE Standard 117?
 12. Are the shelf positions, number, and size other than recommended by Hussmann?
 13. Is there an improper application or control system?
 14. Is the evaporator fan motor/blade inoperative?
 15. Is the defrost time excessive?
 16. Is the defrost termination, thermostat (if used) set too high?
 17. Are the refrigerant controls incorrectly adjusted?
 18. Is the air entering the condenser above design conditions? Are the condenser fins clear of dirt, dust, etc.?
 19. Is there a shortage of refrigerant?
 - f) **READING** - The thermometer reading should be made only after it has been allowed to stabilize, i.e., maintain a constant reading. Loading Product: Cases should be allowed to heat up for one hour before product is loaded. Temperature adjustments: Allow 4 hours after adjustment has been made before testing pulp temperature of product.
 - g) **OTHER OBSERVATIONS** - Other observations should be made which may indicate operating problems, such as unsatisfactory product, feel/appearance.

Appendix D. - Recommendations to User - Refrigerated

- 1.0 Hussmann Corporation provides instructions and recommendations for proper periodic cleaning. The user will be responsible for such cleaning, including the cleaning of low temperature equipment within the compartment and the cooling coil area(s). Cleaning practices, particularly with respect to proper refrigerator unloading and warm-up, must be in accordance with applicable recommendations.

Appendices (Cont'd)

- 1.1 Cleaning of non frozen food equipment should include a weekly cleaning of the food compartment as a minimum to prevent bacteria growth from accumulating. Actual use and products may dictate more frequent cleaning. Circumstances of use and equipment design must also dictate the frequency of cleaning the display areas. Weekly washing down of the storage compartment is also recommended, especially for equipment subject to drippage of milk or other liquids, or the collection of vegetable, meat, crumbs, etc. or other debris or litter. Daily cleaning of the external areas surrounding the storage or display compartments with detergent and water will keep the equipment presentable and prevent grime buildup.
- 1.2 Load levels as defined by the manufacturer must be observed.
- 1.3 The best preservation is achieved by following these rules:
- a) Buy quality products.
 - b) Receive perishables from transit equipment at the ideal temperature for the particular product.
 - c) Expedite perishables to the store's storage equipment to avoid unnecessary warm-up and prolonged temperature recovery. Food store refrigerators are not food chillers nor can they reclaim quality lost through previous mishandling.
 - d) Care must be taken when cross merchandising products to ensure that potentially hazardous vegetable products are not placed in non refrigerated areas.
 - e) Display and storage equipment doors should be kept closed during periods of inactivity.
 - f) Minimize the transfer time of perishables from storage to display.
 - g) Keep meat under refrigeration in meat cutting and processing area except for the few moments it is being handled in processing. When a cut or tray of meat is not to be worked on immediately, the procedure should call for returning it to refrigeration.
 - h) Keep tools clean and sanitized. Since mechanical equipment is used for fresh meat processing, all such equipment should be cleaned at least daily and each time a different kind of meat product comes in contact with the tool or equipment.
 - i) Make sure that all refrigeration equipment is installed and adjusted in strict accordance with the manufacturer's recommendations.
 - j) See that all storage and refrigeration equipment is kept in proper working order by routine maintenance.

Service Record

Last service date: By:

_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

HUSSmann®/Chino

Additional copies of this publication may be obtained by contacting:

Hussmann® Chino
13770 Ramona Avenue • Chino, California 91710
(909) 628-8942 FAX
(909) 590-4910
(800) 395-9229

The <i>MODEL NAME</i> and <i>SERIAL NUMBER</i> is required in order to provide you with the correct parts and information for your particular unit. They can be found on a small metal plate on the unit. Please note them below for future reference.
MODEL: _____
SERIAL NUMBER: _____